

# 14FF- 2Z- C2-1/2/3

# RELAY SOCKET



CE

cRU us

File No.:E253370

Screw terminal,  
DIN rail / Screw mounted,  
with finger protection device

## CHARACTERISTICS

Ambient temperature :	-40 °C to 70 °C
Rated voltage :	300VAC
Rated current :	12A ( per pole )
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PA66+GF V0 (UL)
Contacts spring material :	QSn6.5-0.1
Plastic retainer :	available
White plastic tag :	available
Modules (on request) :	HFAA to HFHU module available
Terminal torque :	0.6Nm
Wire strip length :	7mm



Applicable relay type:

- 1: suit for HF115F(JQX-115F) series (Relay height 15.7mm).
- 2: suit for HF141FH (Relay height 20.6mm).
- 3: suit for HF14FW(JQX-14FW)/HF140FF(JZX-140FF) (Relay height 26.3mm, 25.5mm).


## DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM

Unit: mm



### Outline Dimensions

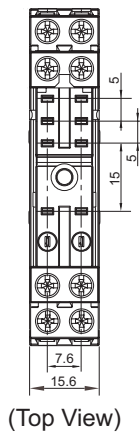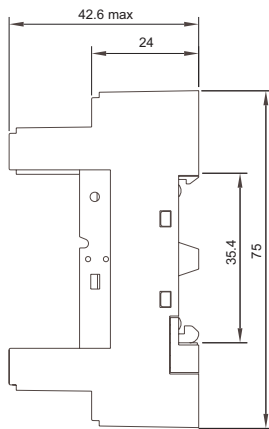

### Wiring Diagram

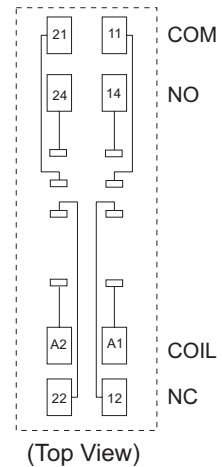

### Retainer Dimensions



Three types of H:

H1=16mm (for -1 type)

H2=21mm (for -2 type)

H3=26mm (for -3 type)

You can choose the type you need.



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00