

International **IR** Rectifier

60CTQ150PbF

SCHOTTKY RECTIFIER

60 Amp

$I_{F(AV)} = 60\text{Amp}$
 $V_R = 150\text{V}$

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	60	A
V_{RRM}	150	V
I_{FSM} @ $t_p = 5\ \mu\text{s}$ sine	710	A
V_F @ $30\text{ A}_{pk}, T_J = 125^\circ\text{C}$ typical (per leg)	0.69	V
T_J range	-55 to 175	°C



Description/ Features

The 60CTQ150PbF center tap Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175°C T_J operation
- Center tap TO-220 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

Case Styles

60CTQ150PbF



TO-220

Voltage Ratings

Part number	60CTQ150PbF		
V_R Max. DC Reverse Voltage (V)	150		
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters	60CTQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg) * See Fig. 5 (Per Device)	30 60	A	50% duty cycle @ $T_J = 137^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	710 270	A	5μs Sine or 3μs Rect. pulse Following any rated load condition and with 10ms Sine or 6ms Rect. pulse applied
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	0.4	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 0.9$ Amps, $L = 1$ mH
I_{AR} Repetitive Avalanche Current (Per Leg)	0.9	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	Typ.	Max.	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1) (Per Leg) * See Fig. 1	0.83	0.88	V	$T_J = 25^\circ\text{C}$
	0.98	1.09	V	
	0.67	0.72	V	$T_J = 125^\circ\text{C}$
	0.82	0.87	V	
I_{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2	7	75	μA	$T_J = 25^\circ\text{C}$
	7.2	20	mA	$T_J = 125^\circ\text{C}$
C_T Typical Junction Capacitance (Per Leg)	-	650	pF	$V_R = 5V_{DC}$ (test signal range 100kHz to 1Mhz) @ 25°C
L_S Typical Series Inductance (Per Leg)	-	7.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	-	10000	V/ μs	(Rated V_R)

(1) Pulse Width < 300μs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	60CTQ	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 175	°C	
T_{stg} Max. Storage Temperature Range	-55 to 175	°C	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg) * See Fig. 4	1.2	°C/W	DC operation
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.6	°C/W	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.25	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	6 (0.21)	g (oz.)	
T Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)
	Max.	12 (10)	
Marking Device	60CTQ150		

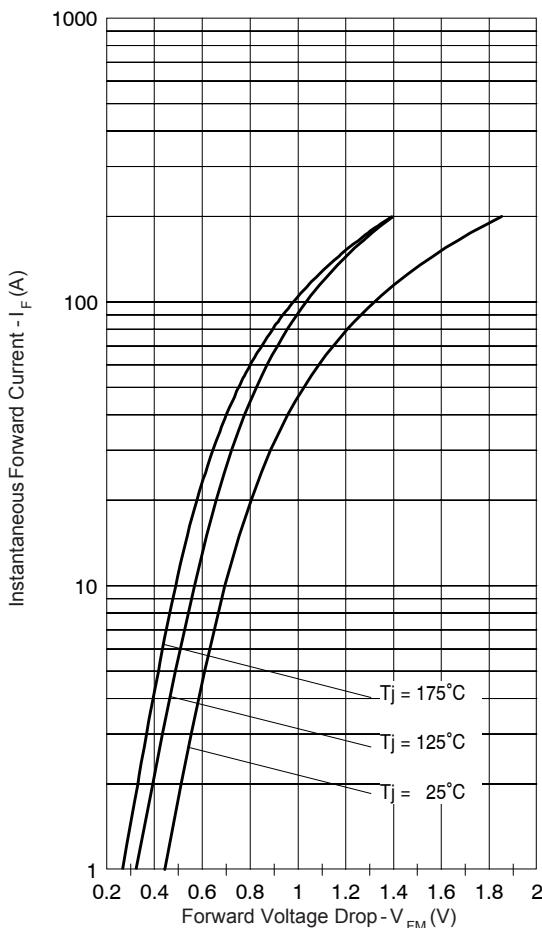


Fig. 1 - Max. Forward Voltage Drop Characteristics
(Per Leg)

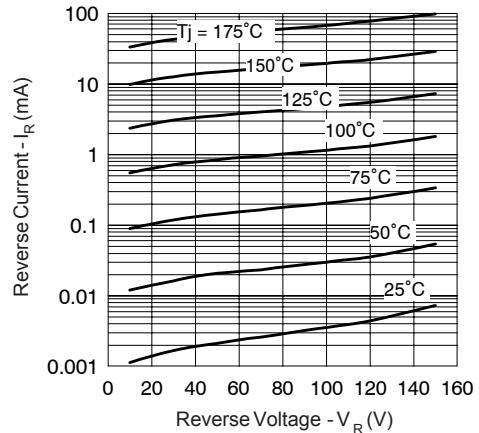


Fig. 2 - Typical Values Of Reverse Current
Vs. Reverse Voltage (Per Leg)

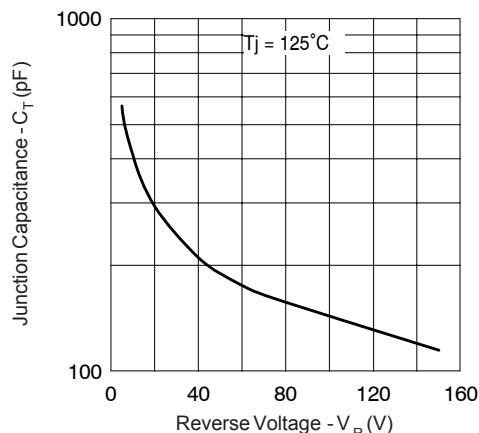


Fig. 3 - Typical Junction Capacitance
Vs. Reverse Voltage (Per Leg)

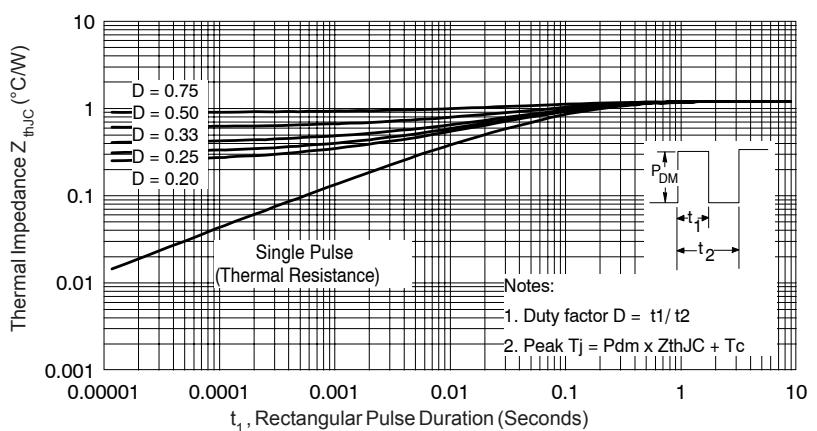


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

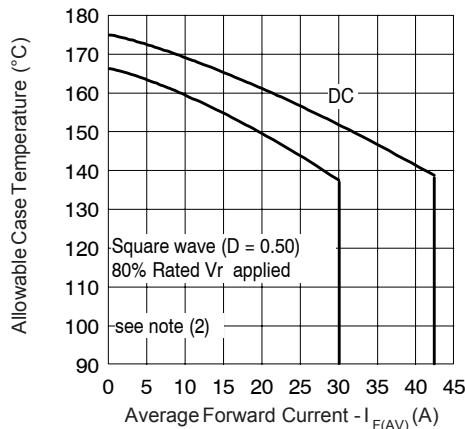


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

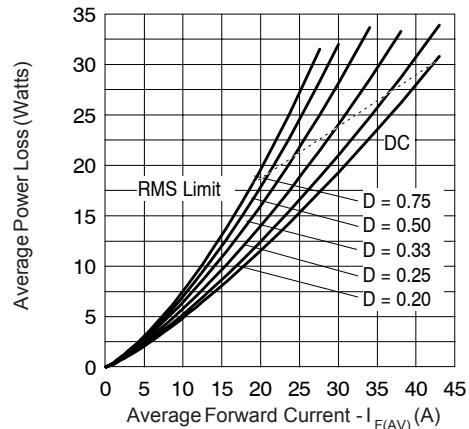


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

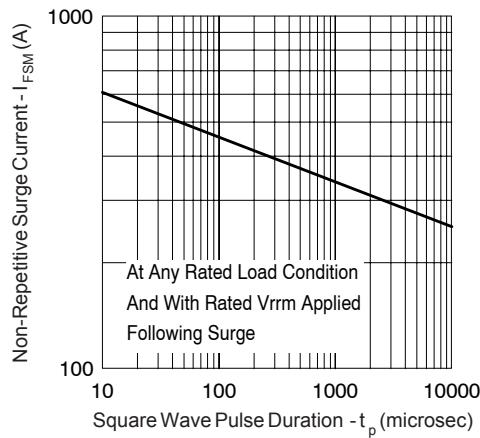


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)


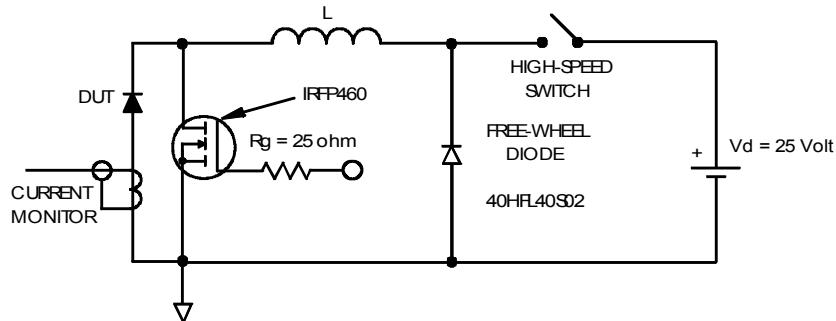



Fig. 8 - Unclamped Inductive Test Circuit

- (2) Formula used: $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$;
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

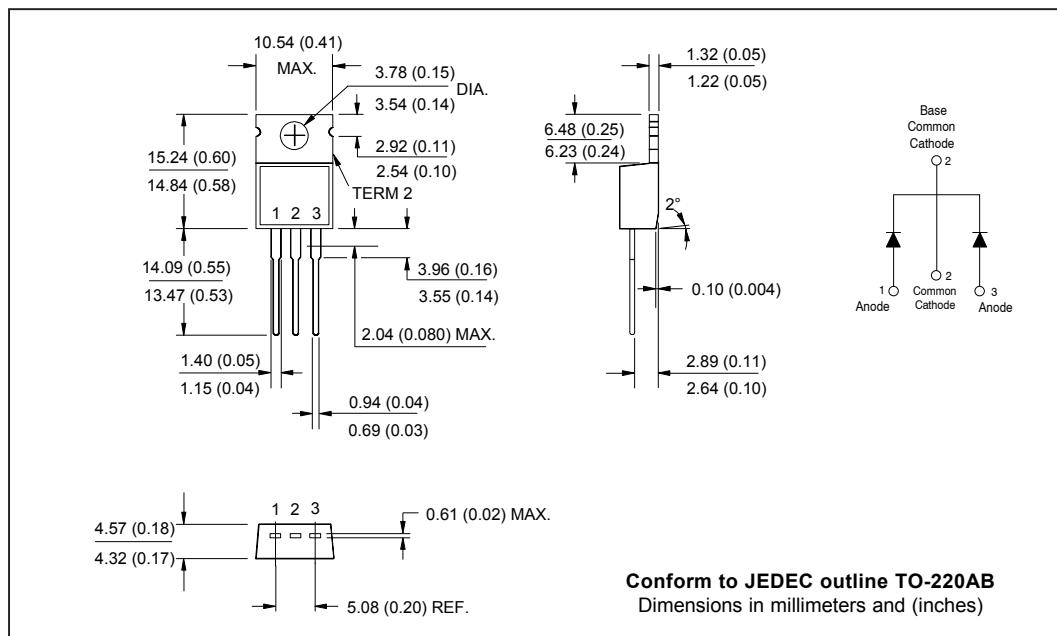

Part Marking Information

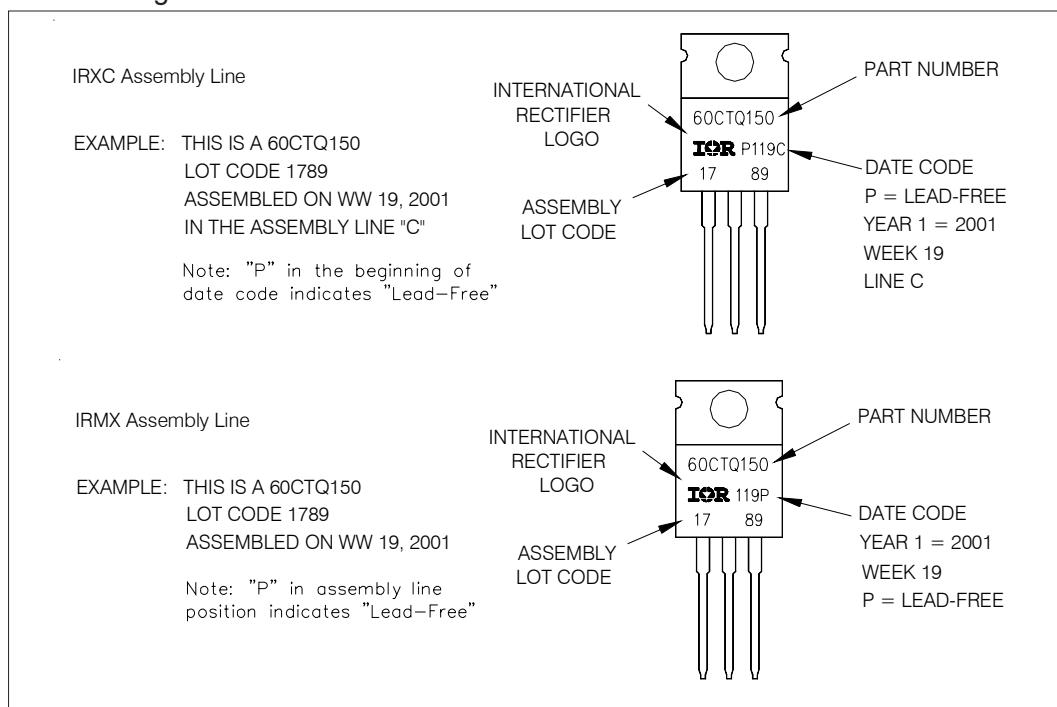

Ordering Information Table

Device Code						
	60 C T Q 150 PbF					
1	(1)	-	Current Rating (60 = 60A)			
2	(2)	-	Circuit Configuration			
			C = Common Cathode			
3	(3)	-	Package			
			T = TO-220			
4	(4)	-	Schottky "Q" Series			
5	(5)	-	Voltage Rating (150 = 150V)			
6	(6)	-	<ul style="list-style-type: none"> • none = Standard Production • PbF = Lead-Free 			
Tube Standard Pack Quantity : 50 pieces						

Data and specifications subject to change without notice.
 This product has been designed and qualified for Industrial Level and Lead-Free.
 Qualification Standards can be found on IR's Web site.

International
 Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
 TAC Fax: (310) 252-7309
 Visit us at www.irf.com for sales contact information. 10/04