



The **6649** is designed to Support TUT Systems' Home Run 1M8 Technology.

- Withstands 235 °C peak infrared reflow temperature.
- Includes protection circuitry, Isolation and EMI filtering.

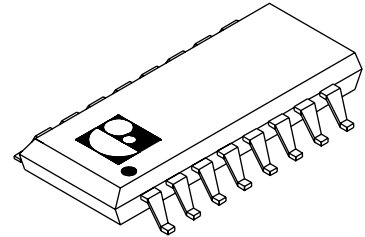

MECHANICAL

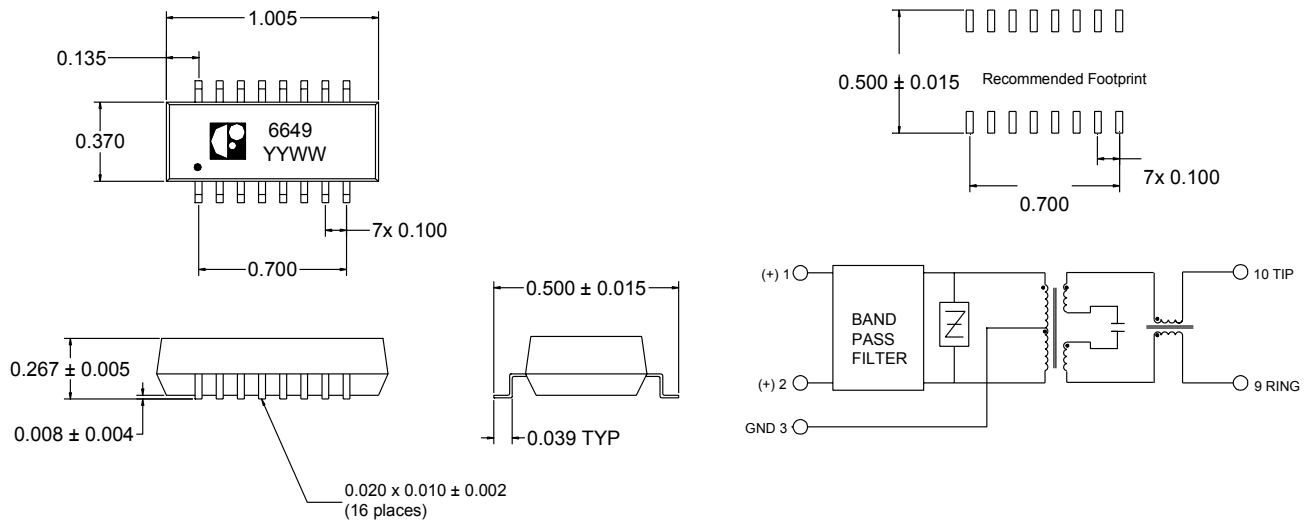

ELECTRICAL SPECIFICATION

Impedance:	.100 ohms
Insertion loss : 6 Mhz to 9 Mhz	< 4 dB
Attenuation @ 1 Mhz:	> 50 dB
@ 27 Mhz:	> 60 dB
Return Loss : 6 mHz to 9 Mhz	.14 dB avg.
Dielectric Test : Pins (1-2) to (10-9)	.2000 Vrms.