


Data Sheet


Features

- For DCS applications
- Usable bandwidth 75 MHz
- Low loss
- No impedance matching required for operation at 50 Ω
- Single-ended operation
- Ceramic Surface Mount Package (SMP)
- Small size

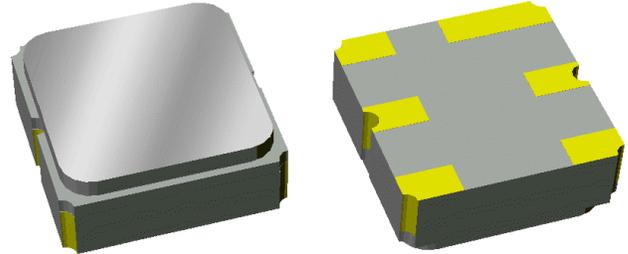


Package

Surface Mount 3.00 x 3.00 x 1.22 mm

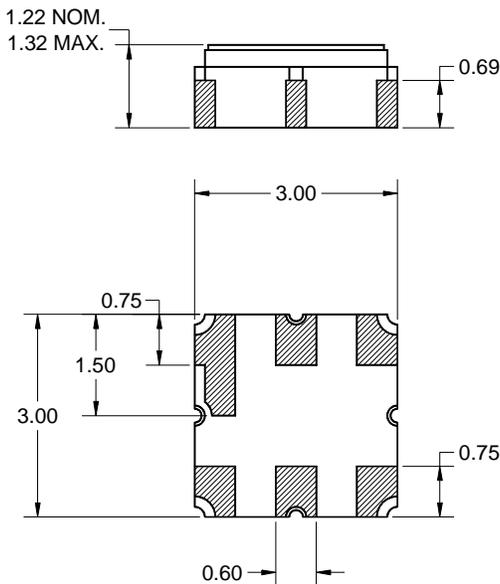

Pin Configuration

Bottom View

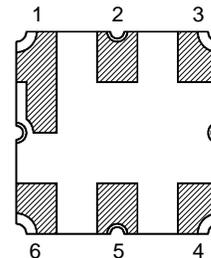

Pin No.	Description
2,5	Input/Output
1,3,4,6	Case ground

Dimensions shown are nominal in millimeters
All tolerances are ± 0.15 mm except overall
length and width ± 0.10 mm

Body: Al_2O_3 ceramic
Lid: Kovar, Ni plated
Terminations: Au plating 0.5 - 1.0 μ m,
over a 2 - 6 μ m Ni plating

Data Sheet

Electrical Specifications ⁽¹⁾


Operating Temperature Range: ⁽²⁾ -20 to +70 °C

Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Center Frequency	-	1842.5	-	MHz
Maximum Insertion Loss				
1805 - 1815 MHz (+15 to +70 °C)	-	2.8	3.3	dB
1805 - 1815 MHz (-20 to +15 °C)	-	-	3.7	dB
1815 - 1870 MHz	-	1.9	3	dB
1870 - 1880 MHz	-	2.1	3.6	dB
Absolute Attenuation				
10 - 1720 MHz	20	23	-	dB
1720 - 1765 MHz	25	29	-	dB
1765 - 1785 MHz	8	23	-	dB
1920 - 1980 MHz	15	27	-	dB
1980 - 2410 MHz	17	24	-	dB
2410 - 3120 MHz	20	24	-	dB
3120 - 4000 MHz	17	25	-	dB
Input/Output Return Loss				
1805 - 1880 MHz	6	9.2	-	dB
Source Impedance: ⁽⁴⁾	-	50	-	Ω
Load Impedance: ⁽⁴⁾	-	50	-	Ω

Notes:





1. All specifications are based on the test circuit shown below
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance shown

Test Circuit:

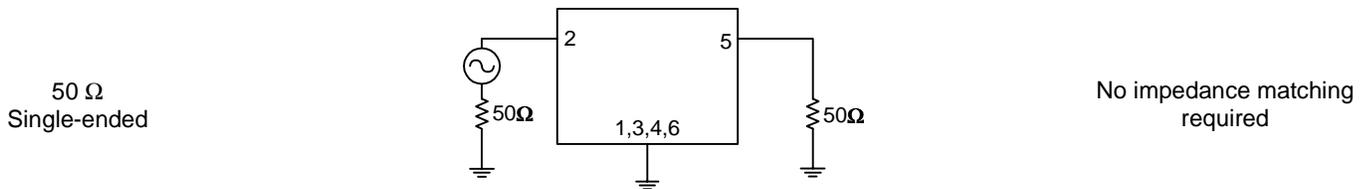


Data Sheet


Typical Performance (at +25°C)

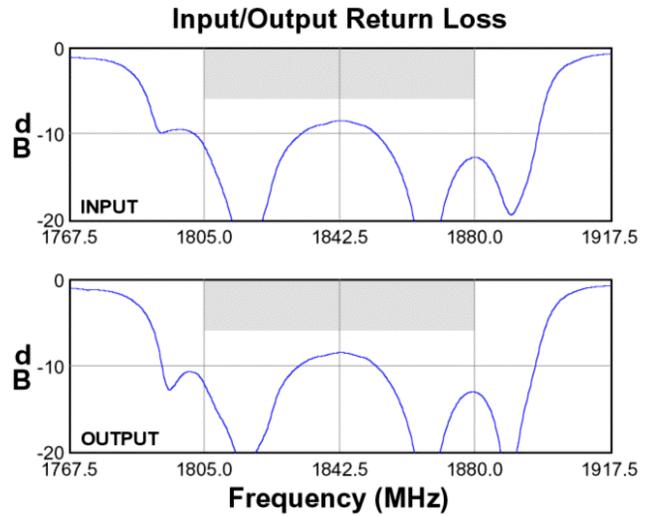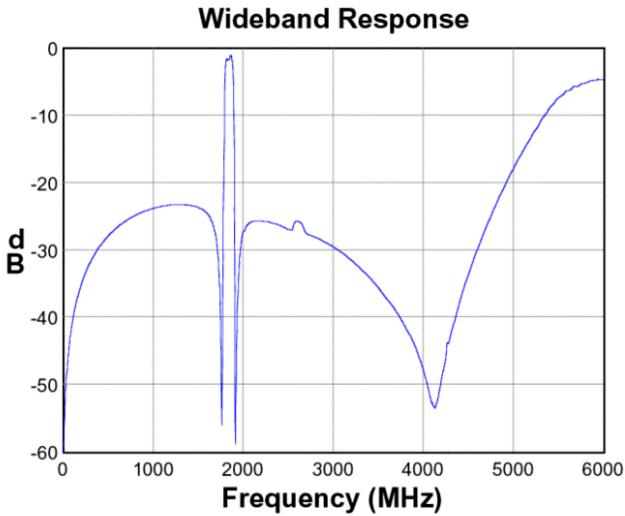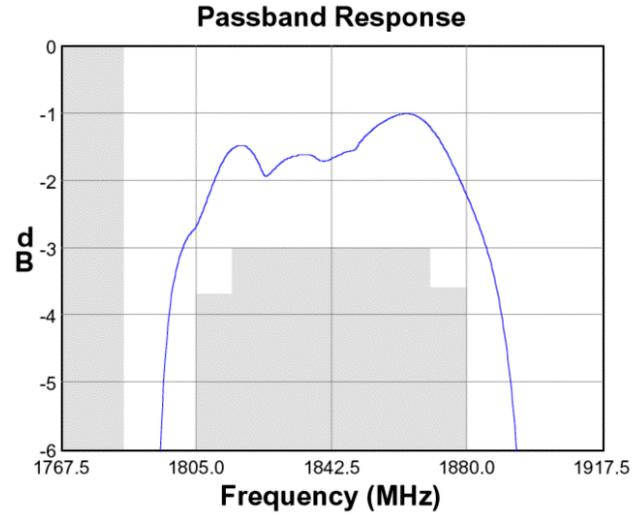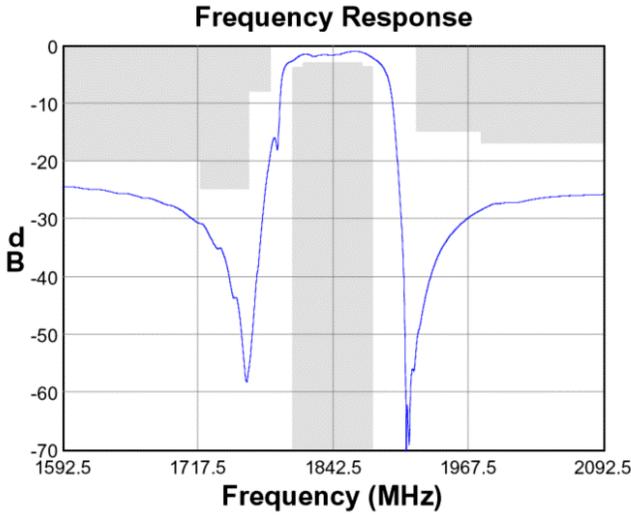

Input Smith Chart

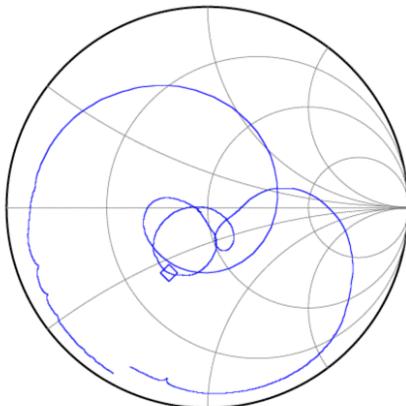


Output Smith Chart

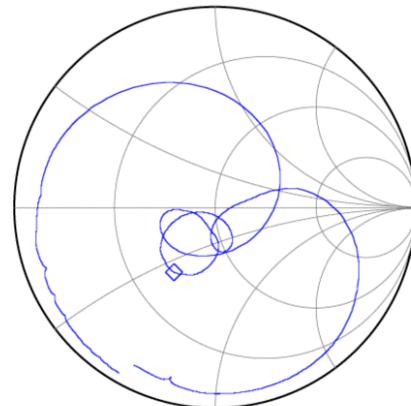

Data Sheet



Matching Schematics

50 Ω
Single-ended

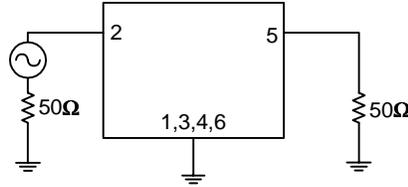

No impedance matching required



Marking PCB Footprint

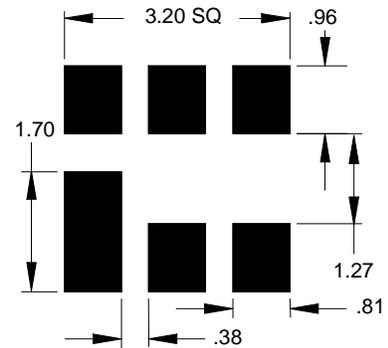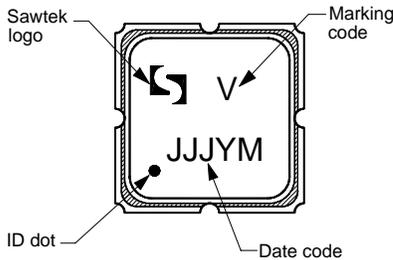

The date code consists of: JJJ = Julian day,
Y = last digit of year, M = manufacturing site code

This footprint represents a recommendation only
Dimensions shown are nominal in millimeters

Tape and Reel

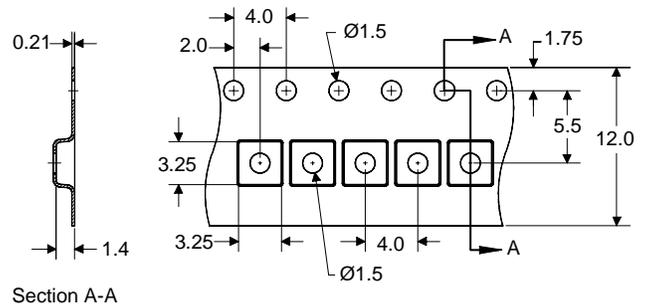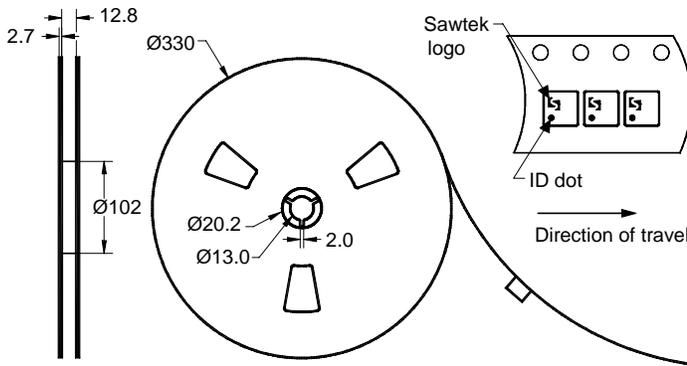

Dimensions shown are nominal in millimeters
Packaging quantity: 5000 units/reel

Data Sheet

Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Unit
Operating Temperature Range	T	-20	+70	°C
Storage Temperature Range	T _{stg}	-40	+85	°C
RF Power	P _{in}	-	+13	dBm

Warnings

- Electrostatic Sensitive Device (ESD) 
- Avoid ultrasonic exposure

Links to Additional Technical Information

[PCB Layout Tips](#)

[Qualification Flowchart](#)

[Soldering Profile](#)

[S-Parameters](#)

[Other Technical Information](#)

Contact Information



PO Box 609501
Orlando, FL 32860-9501
USA

Phone: +1 (407) 886-8860
Fax: +1 (407) 886-7061
Email: custservice@sawtek.com
Web: www.sawtek.com

Or contact one of our worldwide
Network of [sales offices](#),
[Representatives or distributors](#)