


AV431 Adjustable Accurate Reference Source

FEATURES

- The output voltage can be adjusted to 36V
- Low dynamic output impedance ,its typical value is 0.2
- Trapping current capability is 1 to 100mA
- The typical value of the equivalent temperature factor in the whole temperature scope is 50 ppm/
- The effective temperature compensation in the working range of full temperature
- Low output noise voltage
- Fast on -state response

SOT-23-3L

- 1. REFERENCE
- 2. CATHODE
- 3. ANODE

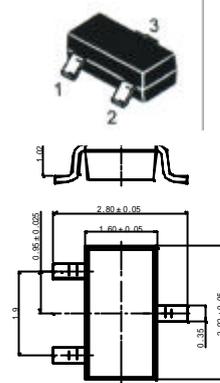

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


| Parameter | SYMBOL | VALUE | UNITS |
|-----------------------------------|-----------|-----------|-------|
| Cathode Voltage | V_{KA} | 37 | V |
| Cathode Current Range(Continuous) | I_{KA} | -100~+150 | mA |
| Reference Input Current Range | I_{ref} | 0.05~+10 | mA |
| Power Dissipation | P_D | 350 | mW |
| Operating temperature | T_{opr} | 0~70 | |
| Storage temperature Range | T_{stg} | -55~+150 | |

ELECTRICAL CHARACTERISTICS ($T_{amb}=25$ unless otherwise specified)

| Parameter | Symbol | Test conditions | MIN | TYP | MAX | UNIT |
|---|-------------------|--|---------------------------|-------|-------|---------|
| Reference Input Voltage | V_{ref} | $V_{KA}=V_{REF}, I_{KA}=10mA$ | 2.440 | 2.495 | 2.550 | V |
| Deviation of reference input Voltage Over temperature (note) | V_{ref}/ T | $V_{KA}=V_{REF}, I_{KA}=10mA$ $T_{min} \quad T_a \quad T_{max}$ | | 4.5 | 17 | mV |
| Ratio Of Change in Reference Input Voltage to the change in Cathode Voltage | V_{ref}/ V_{KA} | $I_{KA}=10mA$ | $V_{KA}=10V \sim V_{REF}$ | -1.0 | -2.7 | m V/V |
| | | | $V_{KA}=36V \sim 10V$ | -0.5 | -2.0 | |
| Reference Input Current | I_{ref} | $I_{KA}=10mA, R_1=10K$ $R_2=$ | | 1.5 | 0.5 | μA |
| Deviation Of Reference Input Current Over Full Temperature Range | I_{ref}/ T | $I_{KA}=10mA, R_1=10K$ $R_2=$ $T_A=full \text{ Temperature}$ | | 0.4 | 1.2 | μA |
| Minimum cathode current for Regulation | $I_{KA}(min)$ | $V_{KA}=V_{REF}$ | | 0.45 | 1.0 | mA |
| Off-state cathode Current | $I_{KA}(OFF)$ | $V_{KA}=36V, V_{REF}=0$ | | 0.05 | 1.0 | μA |
| Dynamic Impedance | Z_{KA} | $V_{KA}=V_{REF}, I_{KA}=1 \text{ to } 100mA$ $f \quad 1.0KHZ$ | | 0.15 | 0.5 | |

Note : $T_{MIN}=0$, $T_{MAX}=+70$

SOT-23-3L PACKAGE OUTLINE DIMENSIONS

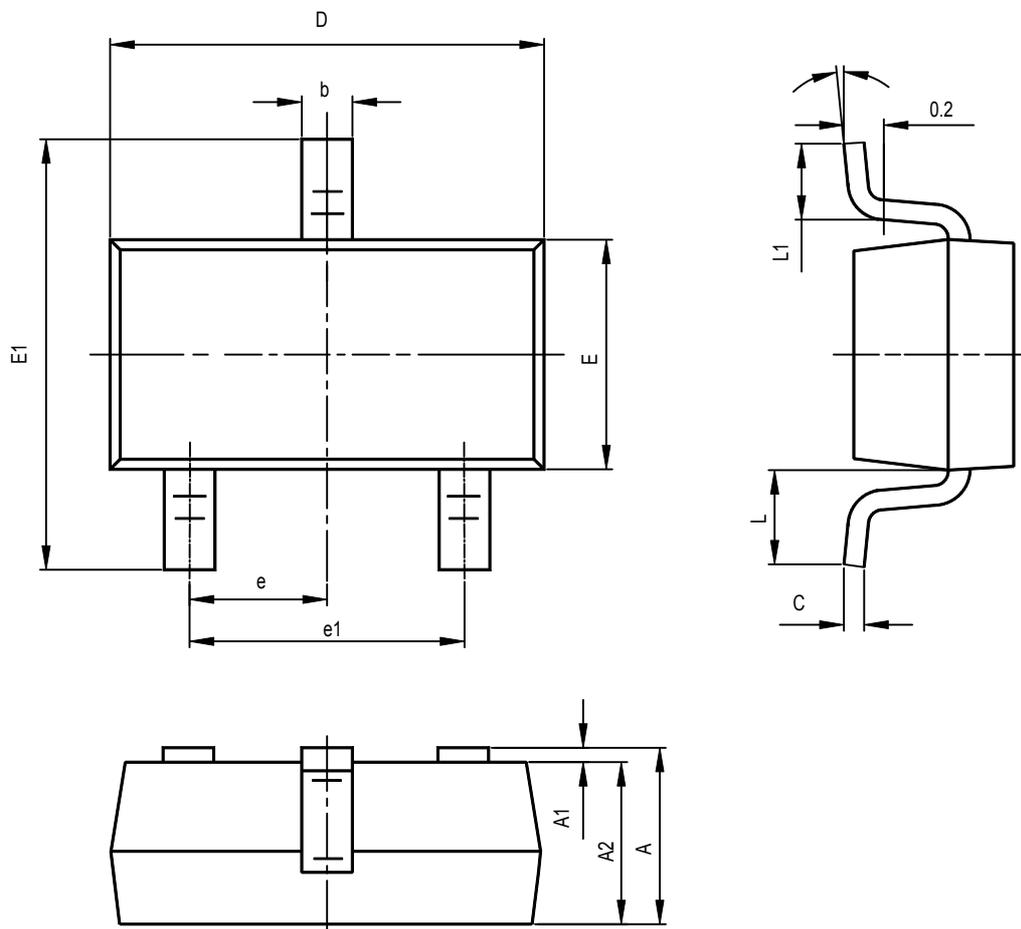

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.400 | 0.012 | 0.016 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950TPY | | 0.037TPY | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.700REF | | 0.028REF | |
| L1 | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |