



SAW Components

Data Sheet B7744




Ceramic package DCS4D
Features

- Low-loss RF filter for mobile telephone PCN systems, receive path
- Low amplitude ripple
- Usable passband 75 MHz
- No matching network required for operation at 50 Ω
- Suitable for GPRS class 1 to 12
- Package for **S**urface **M**ounted **T**echnology (**SMT**)

Terminals


- Gold-plated Ni

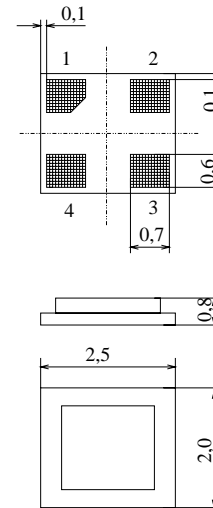

Dimensions in mm, approx. weight 0,012 g

Pin configuration

- | | |
|------|----------------|
| 1 | Input |
| 3 | Output |
| 2, 4 | To be grounded |

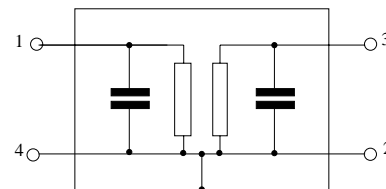

Type	Ordering code	Marking and Package according to	Packing according to
B7744	B39182-B7744-C810	C61157-A7-A89	F61074-V8153-Z000

Electrostatic Sensitive Device (ESD)

Operable temperature range	T	- 10 / + 80	°C	peak power of GSM signal duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	50	V	
Input power at GSM850, GSM900	P_{IN}	15	dBm	
GSM1800, GSM1900 Tx bands	P_{IN}	12	dBm	



SAW Components

B7744

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = +25 \pm 2^\circ \text{C}$
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

			min.	typ.	max.	
Center frequency	f_C		—	1842,5	—	MHz
Maximum insertion attenuation	α_{\max}					
	1805,0 ... 1880,0 MHz		—	2,4	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1805,0 ... 1880,0 MHz		—	0,9	1,7	dB
Input VSWR						
	1805,0 ... 1880,0 MHz		—	1,9	2,2	
Output VSWR						
	1805,0 ... 1880,0 MHz		—	1,9	2,2	
Attenuation	α					
	0,0 ... 1480,0 MHz		35	37	—	dB
	1480,0 ... 1705,0 MHz		28	32	—	dB
	1705,0 ... 1785,0 MHz		12	16	—	dB
	1920,0 ... 1980,0 MHz		15	21	—	dB
	1980,0 ... 2400,0 MHz		23	25	—	dB
	2400,0 ... 2500,0 MHz		30	37	—	dB
	2500,0 ... 3610,0 MHz		25	36	—	dB
	3610,0 ... 3760,0 MHz		35	40	—	dB
	3760,0 ... 6000,0 MHz		25	34	—	dB



SAW Components

B7744

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Characteristics

Operating Temperature Range: $T = -10$ to $+80^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

				min.	typ.	max.	
Center frequency		f_C		—	1842,5	—	MHz
Maximum insertion attenuation	1805,0 ... 1880,0		α_{\max}	—	2,4	3,2	dB
		MHz					
Amplitude ripple (p-p)	1805,0 ... 1880,0		$\Delta\alpha$	—	0,9	1,9	dB
		MHz					
Input VSWR	1805,0 ... 1880,0			—	1,9	2,2	
		MHz					
Output VSWR	1805,0 ... 1880,0			—	1,9	2,2	
		MHz					
Attenuation			α				
	0,0 ... 1480,0			35	37	—	dB
		MHz					
	1480,0 ... 1705,0			28	32	—	dB
		MHz					
	1705,0 ... 1785,0			11	15	—	dB
		MHz					
	1920,0 ... 1980,0			15	21	—	dB
		MHz					
	1980,0 ... 2400,0			22	24	—	dB
		MHz					
	2400,0 ... 2500,0			30	37	—	dB
		MHz					
	2500,0 ... 3610,0			25	36	—	dB
		MHz					
	3610,0 ... 3760,0			35	40	—	dB
		MHz					
	3760,0 ... 6000,0			25	34	—	dB
		MHz					



SAW Components

B7744

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet




Characteristics

Operating Temperature Range: $T = -30$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$


				min.	typ.	max.	
Center frequency	f_C			—	1842,5	—	MHz
Maximum insertion attenuation	α_{\max}			—	2,4	3,2	
		1805,0 ... 1880,0	MHz				dB
Amplitude ripple (p-p)	$\Delta\alpha$			—	0,9	1,9	
		1805,0 ... 1880,0	MHz				dB
Input VSWR				—	1,9	2,2	
		1805,0 ... 1880,0	MHz				
Output VSWR				—	1,9	2,2	
		1805,0 ... 1880,0	MHz				
Attenuation	α						
		0,0 ... 1480,0	MHz	35	37	—	dB
		1480,0 ... 1705,0	MHz	28	32	—	dB
		1705,0 ... 1785,0	MHz	10	15	—	dB
		1920,0 ... 1980,0	MHz	15	21	—	dB
		1980,0 ... 2400,0	MHz	22	24	—	dB
		2400,0 ... 2500,0	MHz	30	37	—	dB
		2500,0 ... 3610,0	MHz	25	36	—	dB
		3610,0 ... 3760,0	MHz	35	40	—	dB
		3760,0 ... 6000,0	MHz	25	34	—	dB



Transfer function (spec for 25° C)

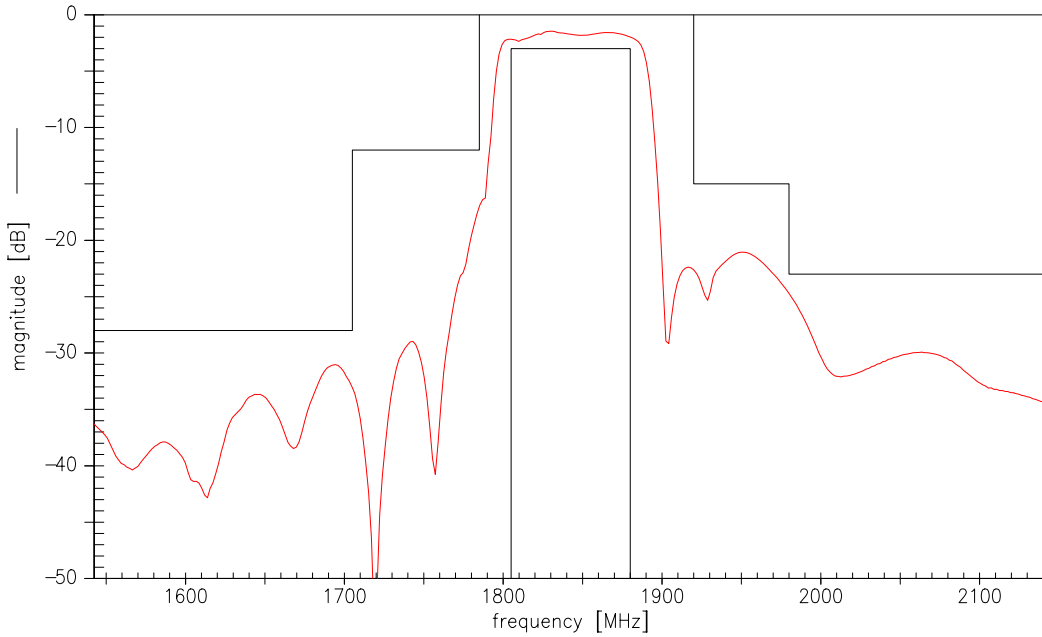

Transfer function (wideband)

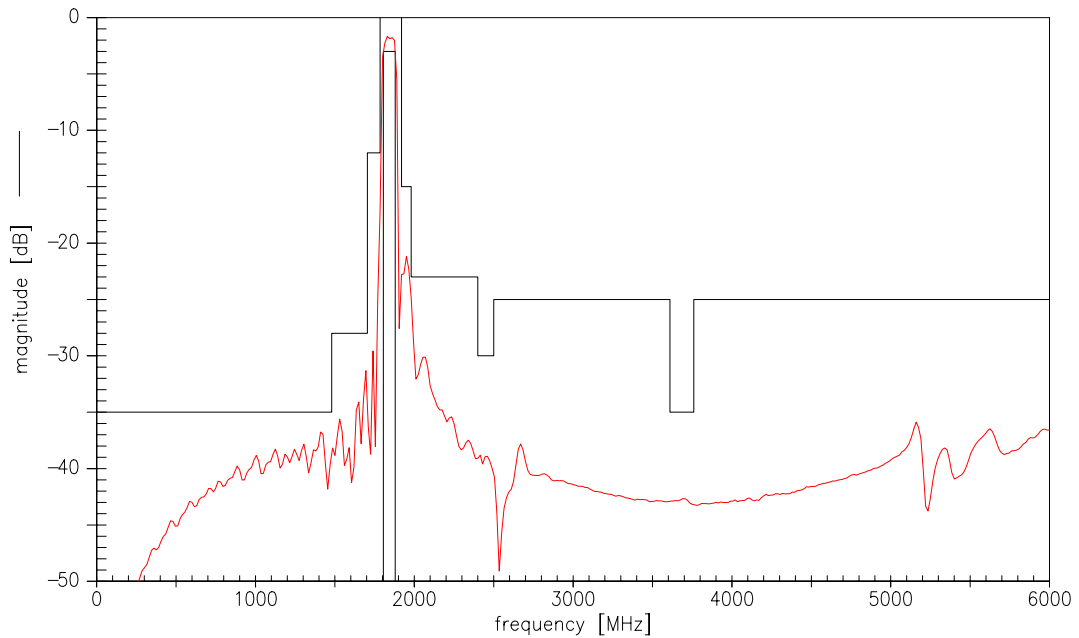



SAW Components

B7744

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2002. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.