

**I Core Chokes**

**Rated voltage 500 Vac/600 Vdc**  
**Rated current 0,2 to 2 A**  
**Rated inductance 0,68 to 82 mH**


**Construction**

- Rectangular plastic case
- Resin potting

**Features**

- Low power dissipation
- Broadband interference suppression
- Compact design

**Applications**

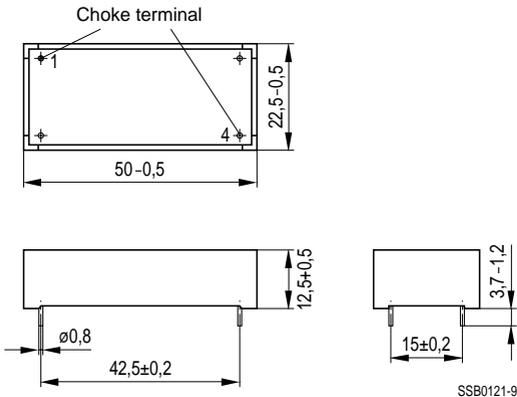
- Attenuation of differential and common-mode interference
- High-performance power supplies
- Industrial applications

**Terminals**

- Pins fitting standard PCB grid

**Marking**

Manufacturer, ordering code,  
 rated inductance, rated voltage, rated current

**Dimensional drawing**


**I Core Chokes**
**General technical data**

Inductance tolerance	$\pm 20 \%$
Rated current $I_R$	Referred to 50 Hz and 60 °C ambient temperature
DC resistance $R_{typ}$	Typical value, measured at 20 °C ambient temperature
Climatic category	40/125/56 (– 40 °C/+ 125 °C/56 days damp heat test) in accordance with IEC 60068-1
Permissible operating current at 400 Hz	$0,75 \cdot I_R$
Weight	Approx. 40 g

For further technical [see page 308](#)

**Characteristics and ordering codes**

$I_R$ A	$L_R$ mH	$R_{typ}$ $\Omega$	Ordering code
0,2	82	45	B82502-W-C2
0,5	15	8,5	B82502-W-C5
1	3,3	1,9	B82502-W-C8
2	0,68	0,55	B82502-W-C10

**Impedance  $|Z|$   
versus frequency  $f$** 
