

Preliminary

BA01232

HBT HYBRID IC

Specifications are subject to change without notice.

DESCRIPTION

The BA01232 is GaAs RF amplifier designed for W-CDMA hand-held phone.


FEATURES

- Low voltage $V_{cc}=3.5V$
- High power $P_o=26.5dBm$ @1920~1980MHz
- High gain $G_p=27.5dB$ @ $P_o=26.5dBm$
- 2stage amplifier
- Internal input and output matching
- Small size package 4x4x1.2mm

APPLICATION

W-CDMA(UTRA/FDD) mobile transmitter (UE Power Class 3).

OUTLINE DRAWING

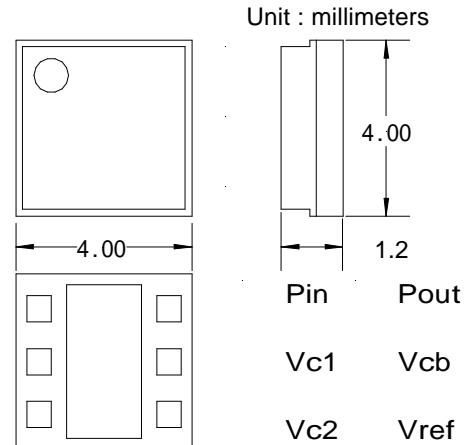

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Symbol	Parameter	Condition	Ratings*	Unit
Vcc	Supply voltage of HPA		6	V
Pin	Input power	ZG=ZL=50Ω	7	dBm
Tc(op)	Operating case temp.		-20 ~ +85	°C
Tstg	Storage temp.		-30 ~ +95	°C

*Note : Each maximum rating is guaranteed independently .

ELECTRICAL CHARACTERISTICS(Ta=25°C)

Symbol	Parameter	Test conditions**	Limits			Unit
			MIN	TYP	MAX	
f	Frequency		1920		1980	MHz
Icqt	Idle current	No RF input		35		mA
Ict	Total current			252		mA
PAE	Power added efficiency			50		%
Pin	Input Power	$P_o=26.5dBm$		-1.0		dBm
ρin	Return loss	$V_{c1}=V_{c2}=3.5V$			-6	dB
ACLR	Adjacent channel leakage power at 5MHz	$V_{ref}=2.9V$		-41	-38	dBc
	Adjacent channel leakage power at 10MHz	$V_{cb}=2.9V$		-54	-48	dBc
2Sp/3Sp	2nd/3rd harmonics				-30	dBc
RX noise	RX band noise			-140		dBm/Hz

**NOTE : ZG=ZL=50Ω
3.84Mcps spreading, HPSK.

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, appropriate measures such as (i)placement of substitutive, auxiliary, circuits, (ii)use of non-flammable material or (iii)prevention against any malfunction or mishap.