



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

Features

- Fast Switching Speed
- Low Turn-on Voltage
- Surface Mount Package Ideally Suited for Automatic Insertion
- PN Junction Guard Ring for Transient and ESD Protection

Mechanical Data

- Marking: 43
- Polarity: Indicated by Cathode Band
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

Maximum Ratings @ 25°C Unless Otherwise Specified

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	40	V
Working Peak Reverse Voltage	V_{RWM}		
DC Blocking Voltage	V_R		
RMS Reverse Voltage	$V_{R(RMS)}$	28	V
Forward Continuous Current(Note1)	I_{FM}	200	mA
Forward Surge Current @ $t < 1.0s$	I_{FSM}	600	mA
Power Dissipation(Note 1)	P_d	350	mW
Thermal Resistance(Note 1)	R	357	°C/W
Operation Temp. Range	T_j	-55 to +125	°C
Storage Temp. Range	T_{STG}	-65 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified


Charateristic	Symbol	Min	Typ	Max	Unit	Test Cond.
Forward Voltage	V_F	-----	-----	0.38 1	V	$t_p < 300\mu s$ $I_F = 1.0mA$ $t_p < 300\mu s$ $I_F = 40mA$
Reverse Leakage Current	I_R	-----	20	200	nA	$t_p < 300\mu s$ $V_R = 30V$
Junction Capacitance	C_j	-----	4	5	pF	$V_R = 0V$, $f = 1.0MHz$
Reverse Recovery Time	t_{rr}	-----	-----	5	ns	$I_F = I_R = 10mA$ $I_R = 1.0mA$, $R_L = 100\Omega$

Note: 1. Valid provided that terminals are kept at ambient temperature.

BAS40WX


Surface Mount Schottky Barrier Diode 350mW

SOD-323

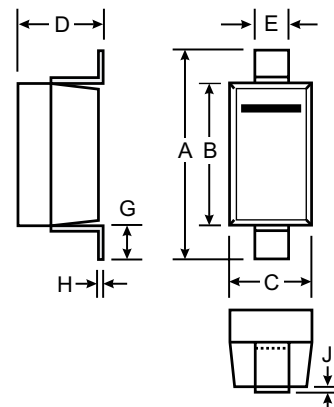

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.090	.107	2.30	2.70	
B	.063	.071	1.60	1.80	
C	.045	.053	1.15	1.35	
D	.031	.043	0.80	1.10	
E	.010	.016	0.25	0.40	
G	.006	.018	0.15	0.45	
H	.004	.010	0.10	0.25	
J	-----	.004	-----	0.10	

SUGGESTED SOLDER PAD LAYOUT

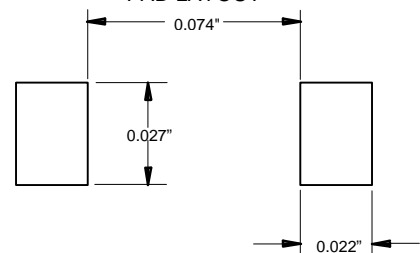



TM

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.