


Panel PC

BPC-6671

17" Industrial Panel PC supports Pentium 4 CPU, OSD, Wireless LAN & ARM

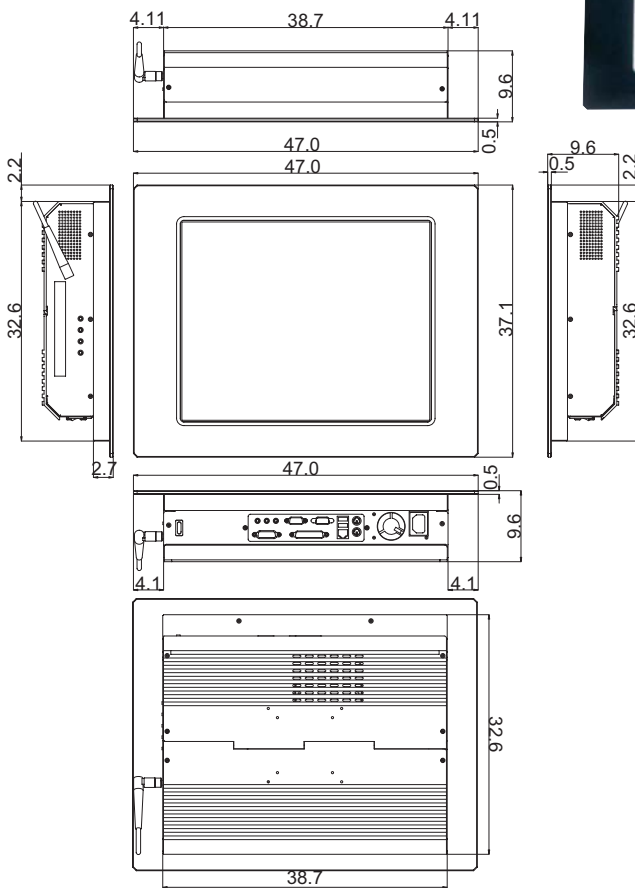

★ Features

- Aluminum chassis
- 17" high brightness TFT color panel display
- Provides Pentium 4 CPU, OSD function
- Built-in industrial ATX motherboard, BS-669, 180W power supply
- VIA VT8751A display controller
- VIA VT6103 10/100 Based LAN
- Provides one wireless LAN module
- AC97 3D audio controller with 2W power amplifier
- One COM, one parallel, two USB connectors
- One 3.5" HDD and one slim CD-ROM spaces
- Two 4cm ball bearing cooling fans
- Supports 17" touch screen (optional)

★ Ordering Guide

● HS-6671

* Standard:

- 17" TFT Panel
- Industrial ATX Motherboard
- BS-669 VGA to Panel Transfer Card
- 2W Audio Amplifier
- Wireless LAN Module
- 180W Power Supply

* Optional:

- 17" Touch Screen
- Processor
- System Memory Module
- 3.5" HDD
- Slim CD-ROM
- ARM

★ Specifications

- * **System Board:** Industrial ATX motherboard
- * **CPU:** PGA 478 for Intel Pentium 4 up to 2.8GHz CPU with Hyper-Threading Technology
- * **Memory:** Two DDR sockets supporting up to 2GB (optional)
- * **OSD:** BS-669 VGA to Panel transfer card, supporting OSD function
- * **Touch Screen:** 17" resistive touch screen (optional)
- * **VGA:** VIA VT8751A display controller with 8MB/16MB/32MB (default) memory
- * **LAN:** VIA VT6103 10/100 Based LAN
- * **Wireless LAN:** Provides one wireless LAN module
- * **Audio:** AC97 3D audio controller with 2W power amplifier
- * **HDD/FDD/CD-ROM:** One 3.5" HDD and one slim CD-ROM spaces
- * **Serial Port:** One serial port
- * **Parallel:** One enhanced bi-directional parallel port supporting SPP/ECP/EPP
- * **USB:** Two USB connectors
- * **Keyboard/Mouse:** PS/2 6-pin Mini DIN
- * **BIOS:** Award PnP Flash BIOS
- * **Watchdog Timer:** Once a problem is detected the system will reset the configurations and reboot the system after five sec.
- * **Thermal System:** Two 4cm ball bearing cooling fans
- * **Power Supply:** 180W power supply
- * **Temperature:** 0~50°C (operating); -20~+60°C (storage)
- * **Dimensions:** 47.0 x 37.1 x 9.6 cm

Panel Specifications

- | | |
|---|--|
| * Screen Size: 17 inches | * Color: 262K |
| * Display Format: 1280 x 1024 pixels | * Brightness: 260 cd/m ² |
| * Pixel Pitch: 0.264(H) x 0.264(V) m/m | * Contrast Ratio: 450:1 |
| | * Response Timer: 16ms |



BOSER Technology Co., Ltd.

15F-6, No. 77, Hsin Tai Wu Road, Sec. 1, Hsichih, Taipei Hsien 221 Taiwan TEL : 886-2-26983333 FAX : 886-2-26983300
<http://www.boser.com.tw> <http://www.isb.com.tw> <http://www.ipc.com.tw> E-Mail: webmaster@boser.com.tw

U.S.A.

TEL : +1 650 4280868

FAX : +1 650 4281172

GERMANY

TEL : +49 221 954790

FAX : +49 221 9547988

U.K.

TEL : +44 1543 466552

FAX : +44 1543 466553

ITALY

TEL : +39 051 452042

FAX : +39 051 455046

KOREA

TEL : +82 2 34737862

FAX : +82 2 34743120

ISRAEL

TEL : +972 3 9203456

FAX : +972 3 9203535

FRANCE

TEL : +33 1 69061790

FAX : +33 1 69433732

FINLAND

TEL : +358 2 6203753

FAX : +358 2 6203770

SHANGHAI

TEL : 021 63676295~7

FAX : 021 63676286



Intel®
Communications
Alliance
Affiliate Member