


Multi DomiLED DMRTB-UJB-ST3+UV3+RS3-1



- (1) Cathode Red**
- (2) Common Anode**
- (3) Cathode Blue**
- (4) Cathode True Green / Green**

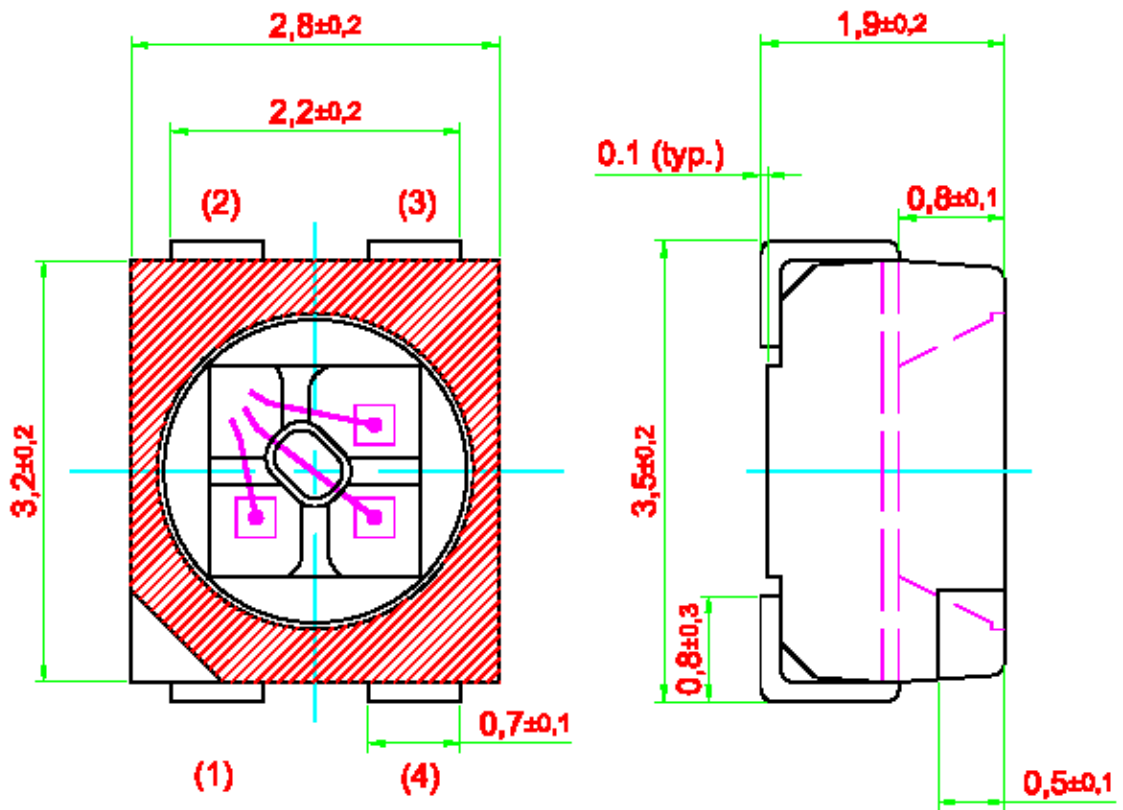

- High brightness tri-color surface mount LED.
- Capable for all video-standards. The RGB-LED chips can be controlled separately.
- 120° viewing angle.
- Small package outline (LxWxH) of 2.8 x 3.2 x 1.9 mm.
- Qualified according to JEDEC moisture sensitivity Level 2.
- Compatible to both IR reflow soldering and TTW soldering.



Part Ordering Number	Color, λ_{dom} (nm)	Luminous Intensity @ $I_f = 20mA$. I_v (mcd)
----------------------	-----------------------------	---

	Chip#1	Chip#2	Chip#3	Chip#1	Chip#2	Chip#3
	Red	True Green	Blue			
DMRTB-UJB-ST3+UV3+RS3-1	625	525	470	140.0 ... 285.0	285.0 ... 560.0	100.0 ... 200.0
<ul style="list-style-type: none"> DMRTB-UJB-S3U3R3 DMRTB-UJB-S3U3S3 DMRTB-UJB-S3V3R3 DMRTB-UJB-S3V3S3 DMRTB-UJB-T3U3R3 DMRTB-UJB-T3U3S3 DMRTB-UJB-T3V3R3 DMRTB-UJB-T3V3S3 				140.0 ... 200.0	285.0 ... 400.0	100.0 ... 140.0
				140.0 ... 200.0	285.0 ... 400.0	140.0 ... 200.0
				140.0 ... 200.0	400.0 ... 560.0	100.0 ... 140.0
				140.0 ... 200.0	400.0 ... 560.0	140.0 ... 200.0
				200.0 ... 285.0	285.0 ... 400.0	100.0 ... 140.0
				200.0 ... 285.0	285.0 ... 400.0	140.0 ... 200.0
				200.0 ... 285.0	400.0 ... 560.0	100.0 ... 140.0
				200.0 ... 285.0	400.0 ... 560.0	140.0 ... 200.0

1. Reel comes in a quantity of 1025 and 2050 units per reel.
2. Luminous intensity is measured with an accuracy of $\pm 11\%$.
3. All electrical and optical data are measured at room temperature; $T_a = 25^\circ C$.

Half Group For Luminous Intensity

Only one IV group is allowed for each chip within a reel.

Groupings	Min. (mcd)	Max. (mcd)
R3	100.0	140.0
S3	140.0	200.0
T3	200.0	285.0
U3	285.0	400.0
V3	400.0	560.0

DOMINANT Semiconductors

Wavelength Grouping.

If wavelength binning is required, only one wavelength group is allowed for each chip within a reel.

Color	Group	Wavelength distribution (nm)
Red	Full	618 - 628
True Green	Full	521 - 536
	A	521 - 526
	B	526 - 531
	C	531 - 536
Blue	Full	465 - 475
	A	465 - 470
	B	470 - 475

Dominant wavelength is measured with an accuracy of ± 1 nm.

Electrical Characteristics at $T_a = 25^\circ\text{C}$

	V_f at $I_f=20\text{mA}$; (V)		Temperature coefficient of V_f ($I_f=20\text{mA}$; $-10^\circ\text{C}<T<100^\circ\text{C}$)
	Typ.	Max	Typ. (mV/K)
Red	1.8	2.45	-2.0
True Green	3.7	4.25	-3.6
Blue	3.6	4.25	-3.1


Optical Characteristics at $T_A = 25^\circ\text{C}$

	Temperature coefficient ($I_f=20\text{mA}$; $-10^\circ\text{C}<T<100^\circ\text{C}$, typ.)		View Angle
	λ_{peak} (nm/K)	$\lambda_{\text{dom.}}$ (nm/K)	(deg.)
Red	0.15	0.05	120
True Green	0.04	0.03	
Blue	0.04	0.02	

Absolute Maximum Ratings


	Maximum Value		Unit
	Red	Green, Blue	
DC forward current.	30	20	mA
Peak pulse current. ($t_p \leq 10 \mu\text{s}$, Duty cycle = 0.005)	1000	200	mA
Reverse voltage.	12	5	V
Power consumption.	75	85	V
Thermal resistance junction/ambient, $R_{th JA}$			K/W
1 chip on	480	530	
3 chips on	770	820	
Thermal resistance junction/solder point, $R_{th JS}$			K/W
1 chip on	260	290	
3 chips on	420	470	
LED junction temperature.	125		°C
Operating temperature.	-40 ... +100		°C
Storage temperature.	-40 ... +100		°C

Recommended Solder Pad

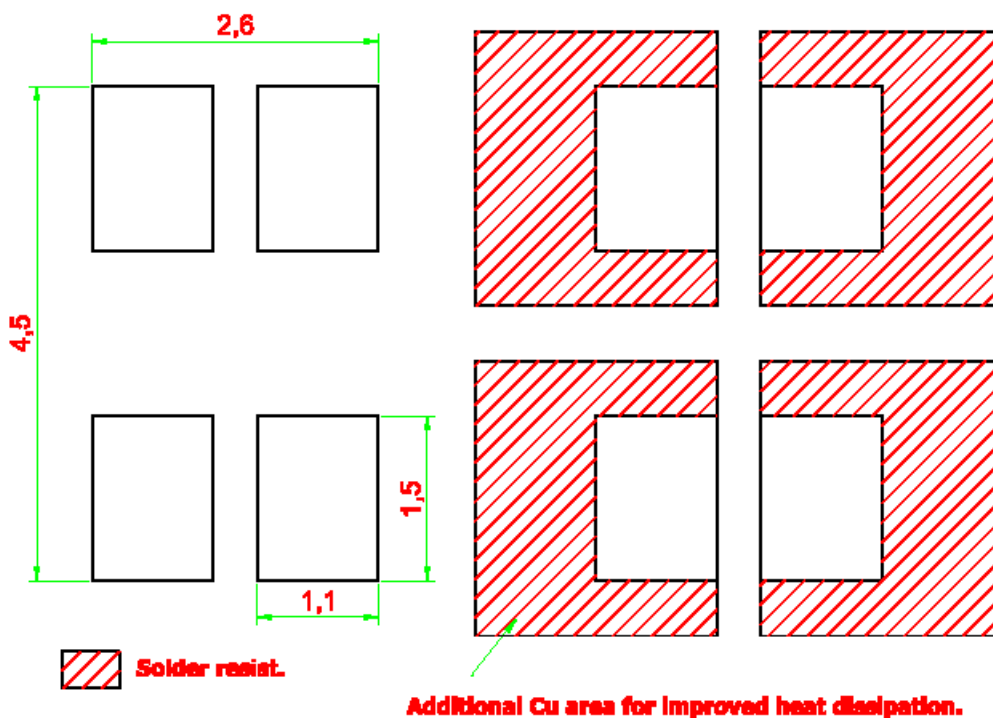


DOMINANT Semiconductors


Luminous intensity vs. forward current.

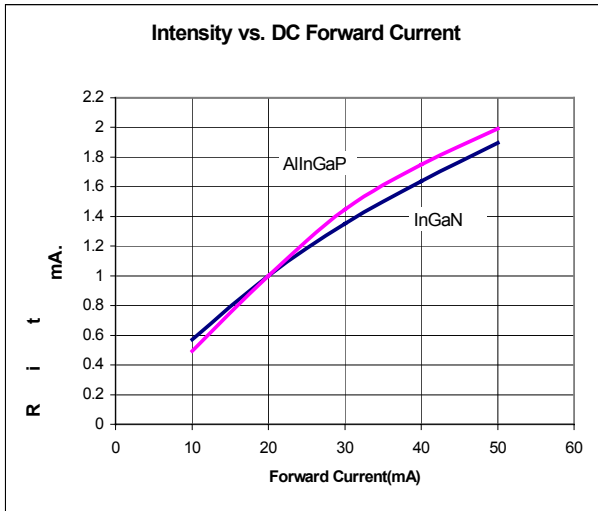


Wavelength vs. forward current.

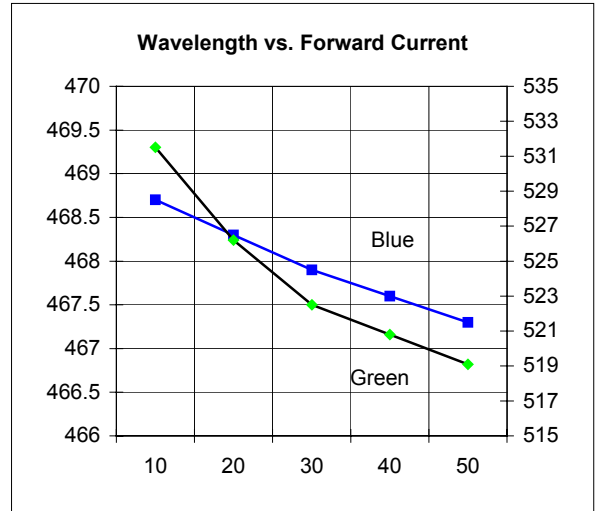


Wavelength Distribution.

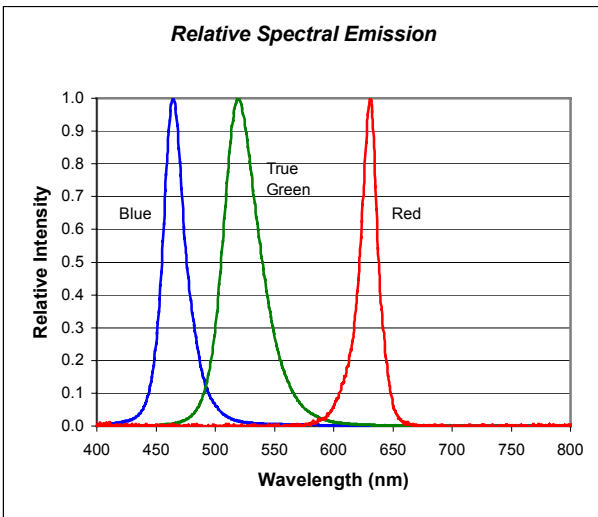

Forward current vs. forward voltage.

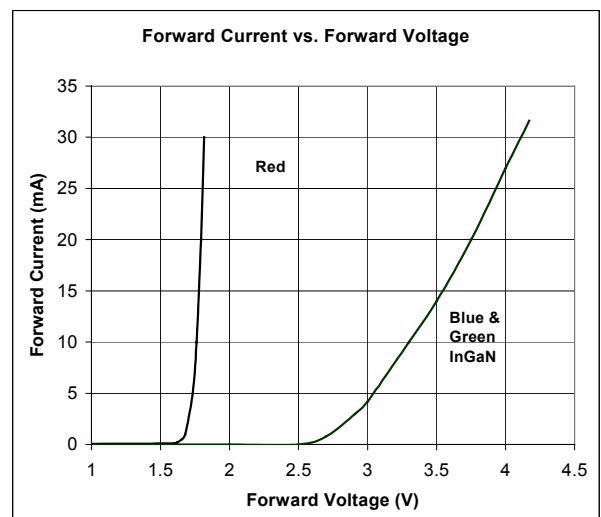


Radiation pattern.

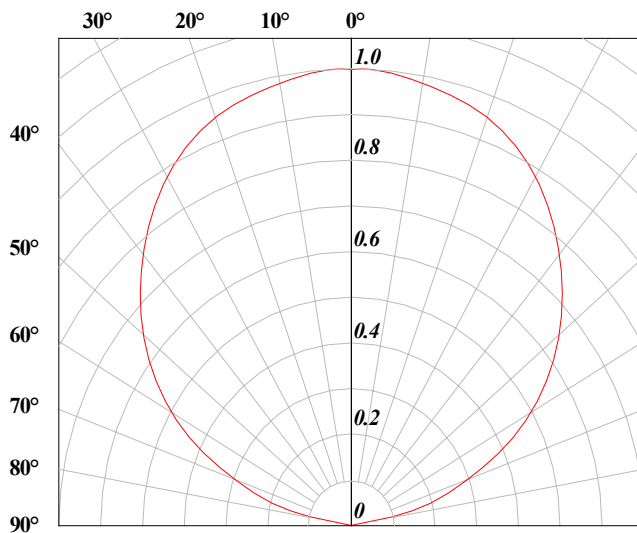


DOMINANT Semiconductors


Max forward current vs. temperature (1 chip on)

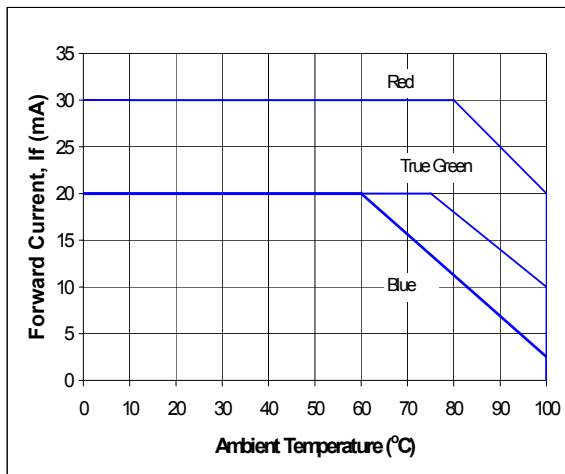


Max forward current vs. temperature (3 chips on)

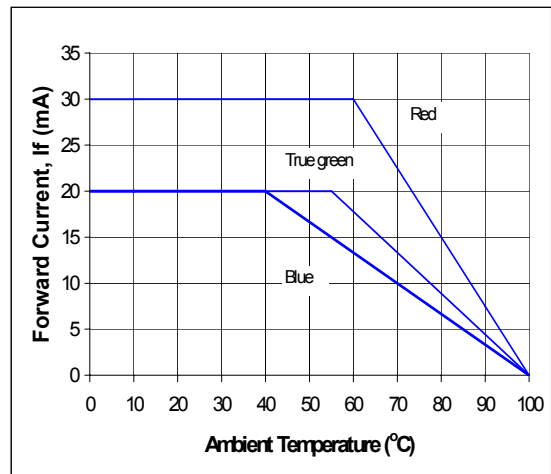


Max forward current vs. temperature (1 chip on)

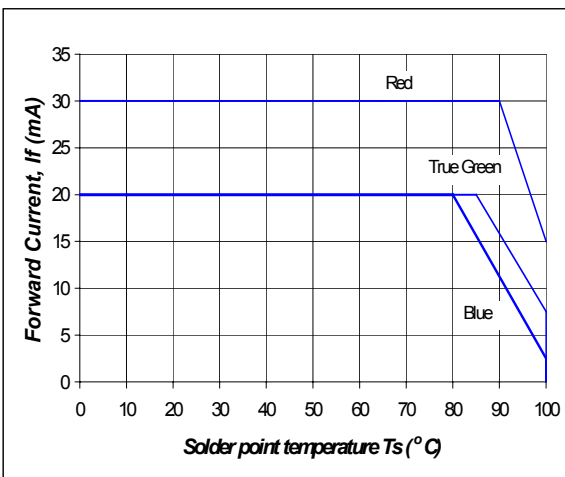


Max forward current vs. temperature (3 chips on)

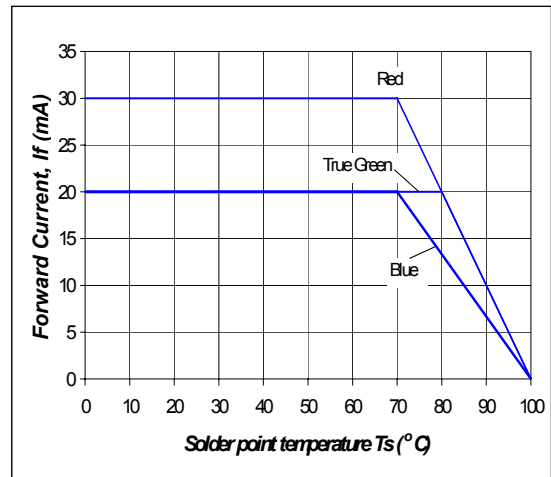

Recommended IR-reflow Soldering Profile.

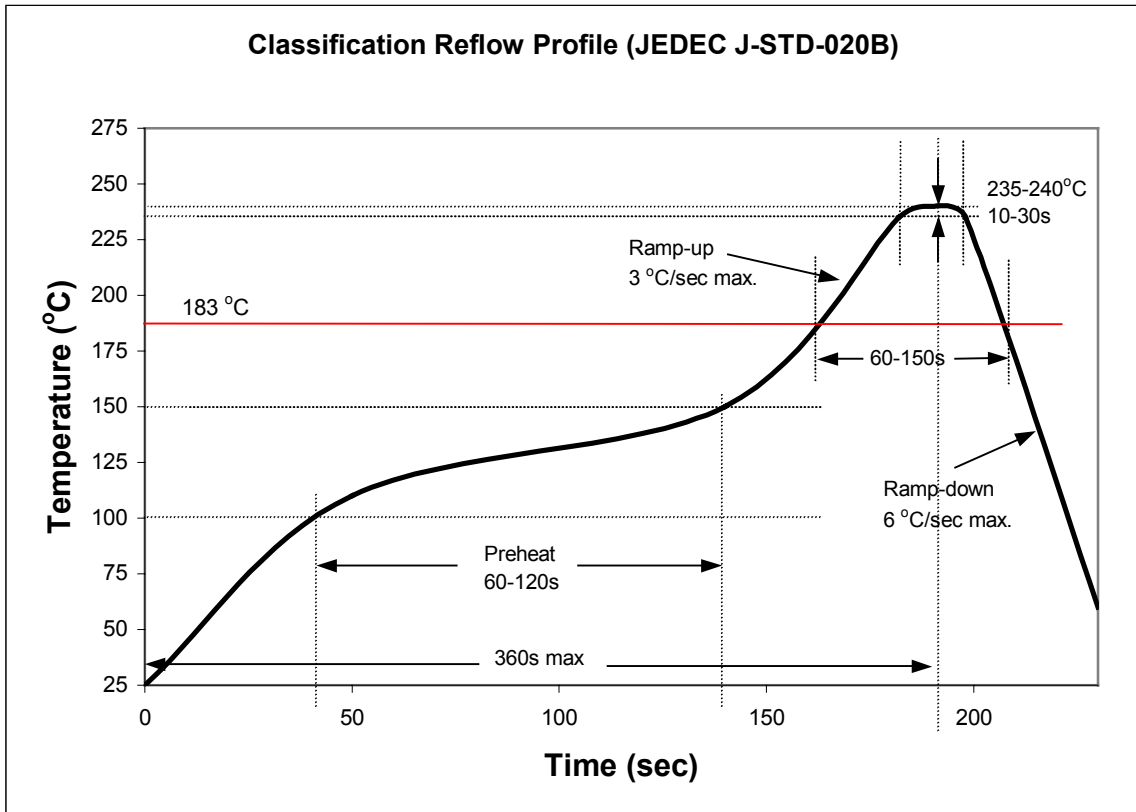

Recommended Pb Free IR-Reflow Soldering Profile.

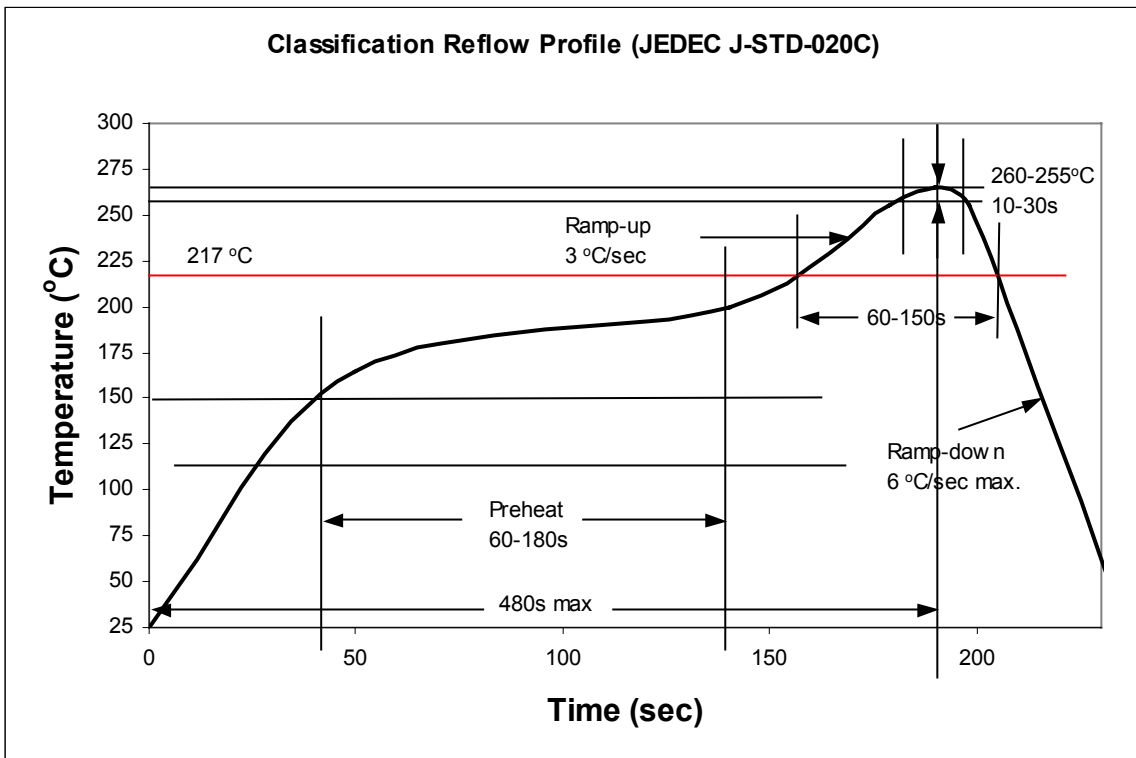

NOTE.

All the information published is considered to be reliable. However, DOMINANT Semiconductors does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Semiconductors reserves the right to make changes at any time without notice to any products in order to improve reliability, function or design.

DOMINANT Semiconductors products are not authorized for use as critical components in life support devices or systems without the express written approval from the managing director of DOMINANT Semiconductors.