

# Common Mode Choke for Telecom Applications


## EPZ3022G

- Designed for 4-Wire Links, such as ISDN-S/T and T1/E1/CEPT
- High Frequency Chokes for EMI Reduction
- Operating Temperature : 0°C to +70°C


### Electrical Parameters @ 25° C

OCL ( $\mu$ H Min.) +25°C	Interwinding Capacitance (pF Max.)	Leakage Inductance ( $\mu$ H Max.)	Hipot (Vrms)	DCR ( $\Omega$ Max.)
@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms		
33	20	0.3	500	0.2


### Schematic



### Typical Common Mode Attenuation

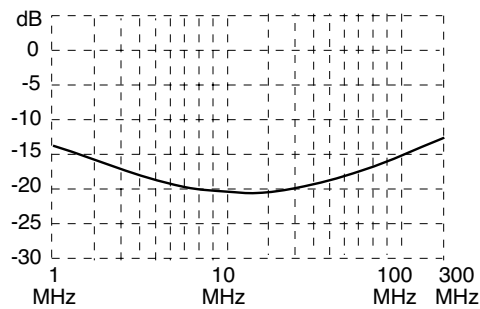

### Package

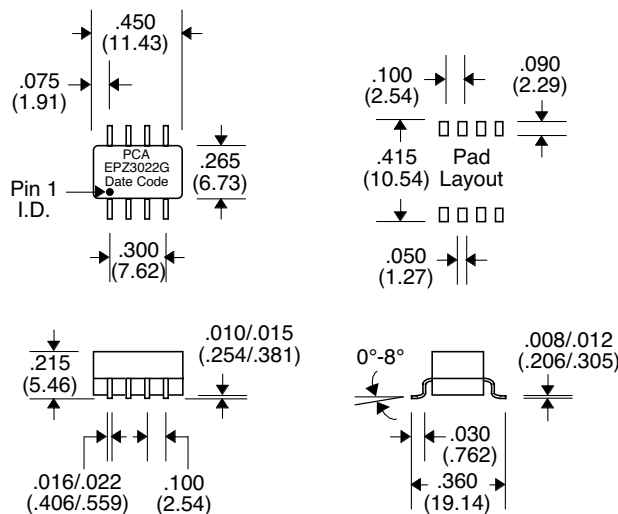

Unless Otherwise Specified Dimensions are in Inches /mm  $\pm$  .010 / .25