



3.3V 2A Low Dropout Regulator with Disable

Features

- Dropout voltage 0.5V @ $I_o = 2A$
- Output current in excess of 2A
- Output voltage accuracy $\pm 2.5\%$
- Quiescent current, typically 5mA
- Internal short circuit current limit
- Internal over temperature protection
- TO220 4pin Full-Mold package
- ON/OFF control

General Description

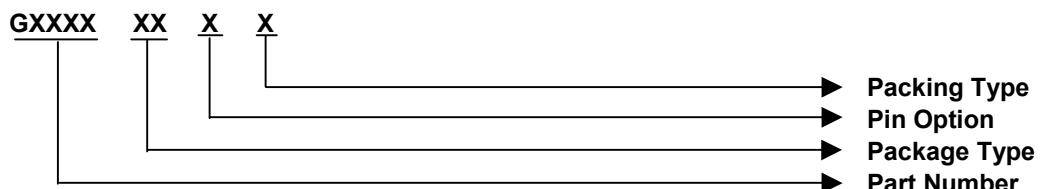
The G9233 positive 3.3V voltage regulator features the ability to source 2A of output current. The dropout voltage is 0.5V at 2A output current. The typical quiescent current is 5mA. Furthermore, the quiescent current is smaller when the regulator is in the dropout mode ($V_{IN} < 3.3V$).

Familiar regulator features such as over temperature and over current protection circuits are provided to prevent it from being damaged by abnormal operating conditions. A V_{dis} pin is provided to disable the output when needed.

Ordering Information

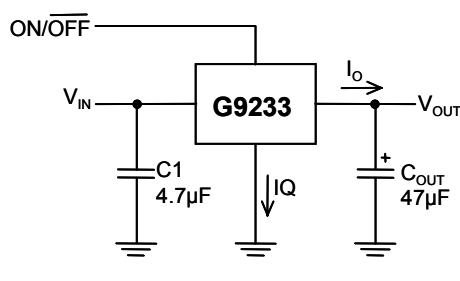
| ORDER NUMBER | MARKING | TEMP. RANGE | PACKAGE | PIN OPTION | | | |
|--------------|---------|----------------|---------------------|------------|-------|-----|-----------|
| | | | | 1 | 2 | 3 | 4 |
| G9233TF1T | G9233 | -40°C to +85°C | TO220F-4L | V_{IN} | V_O | GND | V_{dis} |
| G9233TH1T | G9233 | -40°C to +85°C | TO220F-4L | V_{IN} | V_O | GND | V_{dis} |
| G9233TH1Tf | G9233 | -40°C to +85°C | TO220F-4L (Pb free) | V_{IN} | V_O | GND | V_{dis} |

Order Number Identification




| PACKAGE TYPE | PIN OPTION | | | | PACKAGING |
|-----------------------------|--------------|-------|-----|-----------|-----------|
| TF : TO220F-4L (short lead) | 1 | 2 | 3 | 4 | T : Tube |
| TH : TO220F-4L (long lead) | 1.: V_{IN} | V_O | GND | V_{dis} | |

Typical Application



Package Type





| Absolute Maximum Ratings | | (Note 1) | Operating Conditions | | (Note 1) |
|---|------------------------|----------|------------------------|----------------------|----------|
| Input Voltage..... | 8V | | Input Voltage..... | 3.6V~7V | |
| V_{dis} Voltage..... | 8V | | Temperature Range..... | -40°C ≤ T_A ≤ 85°C | |
| Power Dissipation Internally Limited | (Note 2) | | | | |
| Maximum Junction Temperature..... | 150°C | | | | |
| Storage Temperature Range..... | -65°C ≤ T_J ≤ +150°C | | | | |
| Lead Temperature, Time for Wave Soldering | | | | | |
| TO220 Package..... | 260°C, 10s | | | | |
| Continuous Power Dissipation (T_A = +25°C) | | | | | |
| TO220 No heatsink..... | 1.5W | | | | |
| TO220 with infinite heatsink..... | 15W | | | | |

Electrical Characteristics

V_{IN} = 5V, I_O = 0.5A, C_{IN} = 4.7μF, C_{OUT} = 47μF, T_A = T_J = 25°C unless otherwise specified [Note 3]

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNIT |
|---------------------------|------------|--|------|-----|------|------|
| Output Voltage | | I_O = 0.5A | 3.22 | 3.3 | 3.38 | V |
| Line Regulation | | 4V ≤ V_{IN} ≤ 7V, I_O = 10mA | --- | 0.5 | 2 | % |
| Load Regulation | | 50mA ≤ I_O ≤ 2A | --- | 0.5 | 2 | % |
| Quiescent Current | | V_{IN} = 5V | --- | 5 | 10 | mA |
| Ripple Rejection | | f_i = 120Hz, 1V _{P-P} , I_O = 100mA | --- | 45 | --- | dB |
| Dropout Voltage | | I_O = 2A | --- | --- | 0.5 | V |
| Short Circuit Current | | | --- | 0.8 | --- | A |
| Over Temperature | | | --- | 150 | --- | °C |
| Disable Voltage High | V_{disH} | Output Active | 2.0 | --- | --- | V |
| Disable Voltage Low | V_{disL} | Output Disabled | --- | --- | 0.8 | V |
| Disable Bias Current High | I_{disH} | V_{dis} = 2.7V | --- | --- | 20 | μA |
| Disable Bias Current Low | I_{disL} | V_{dis} = 0.4V | --- | --- | 20 | μA |

Note 1: Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Conditions are conditions under which the device functions but the specifications might not be guaranteed. For guaranteed specifications and test conditions see the Electrical Characteristics.

Note2: The maximum power dissipation is a function of the maximum junction temperature, T_{Jmax} ; total thermal resistance, θ_{JA} , and ambient temperature T_A . The maximum allowable power dissipation at any ambient temperature is $T_{Jmax} - T_A / \theta_{JA}$. If this dissipation is exceeded, the die temperature will rise above 150°C and IC will go into thermal shutdown. For the TO 220 package, θ_{JA} is 60°C/W (No heat sink).

Note3: Low duty pulse techniques are used during test to maintain junction temperature as close to ambient as possible.

Note4: The type of output capacitor should be tantalum or aluminum.

Definitions

Dropout Voltage

The input/output Voltage differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 2% below its nominal value, dropout voltage is affected by junction temperature, load current and minimum input supply requirements.

Line Regulation

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

Load Regulation

The change in output voltage for a change in load current at constant chip temperature. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

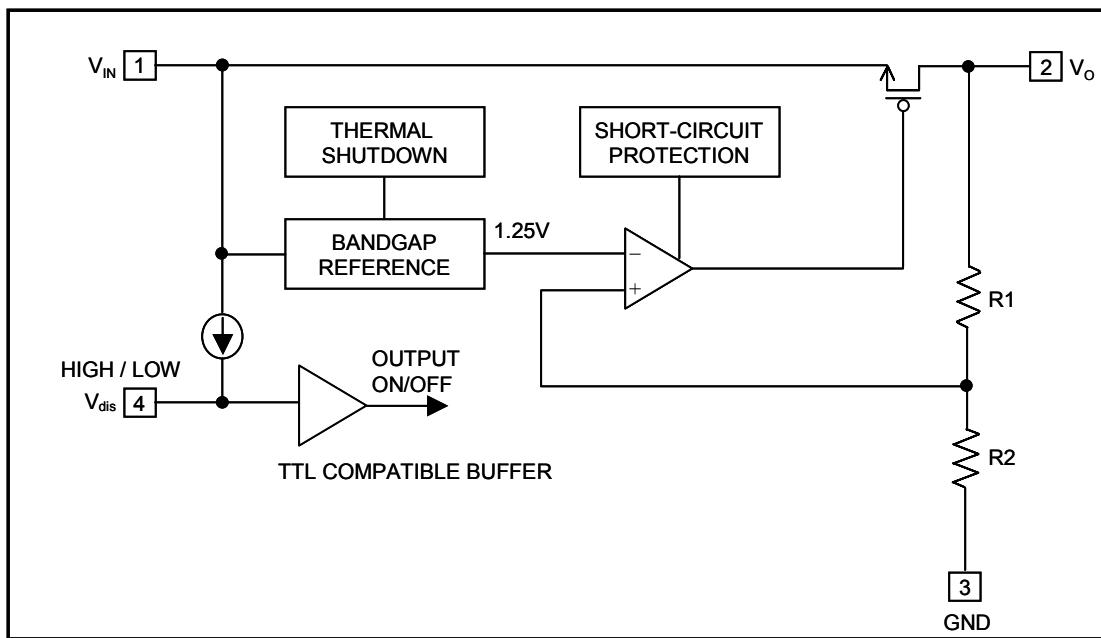
Maximum Power Dissipation

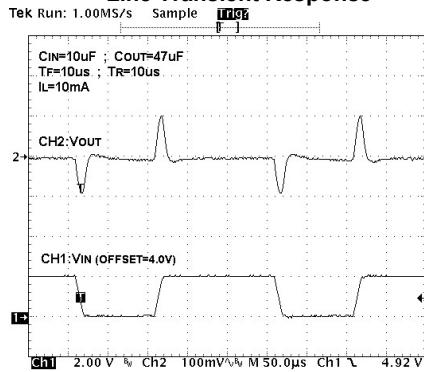
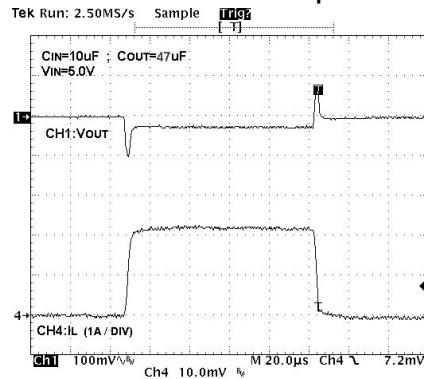
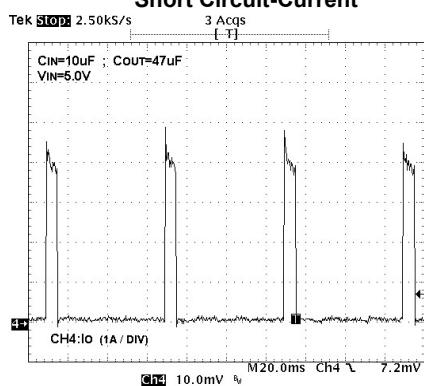
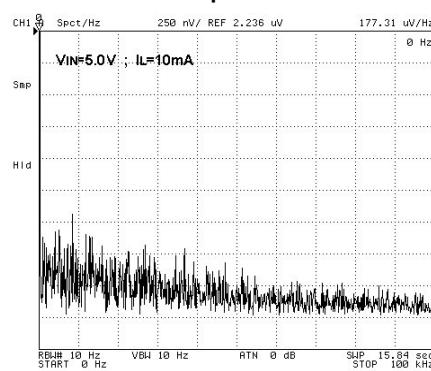
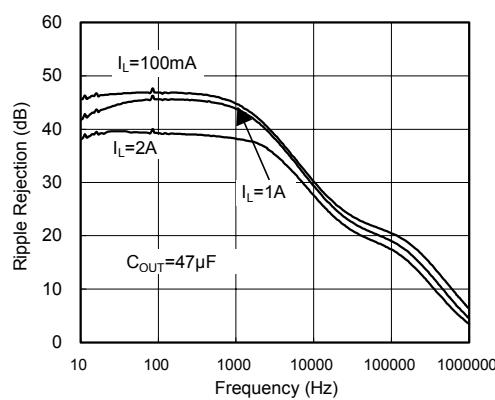
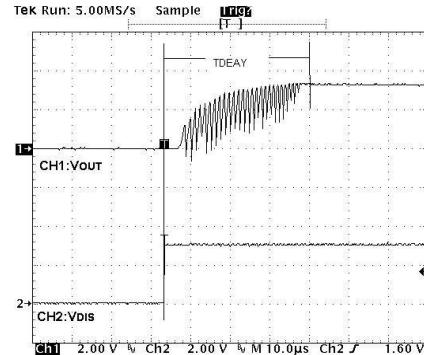
The maximum total device dissipation for which the regulator will operate within specifications.

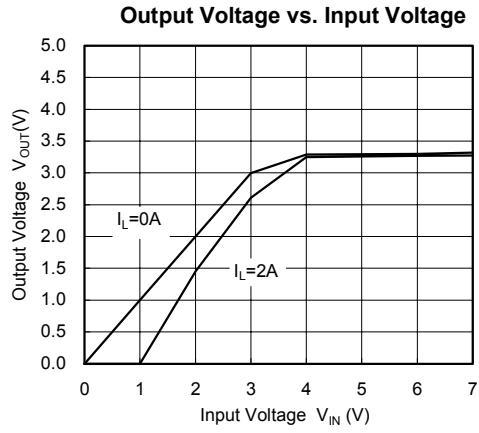
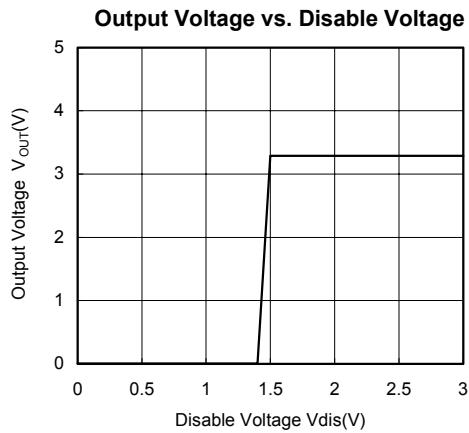
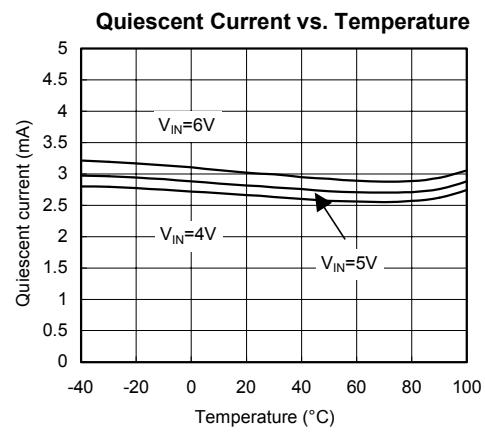
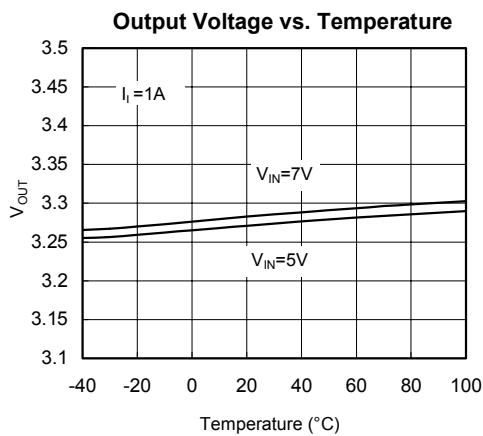
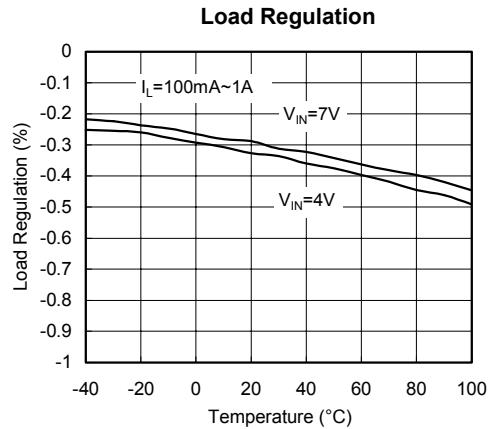
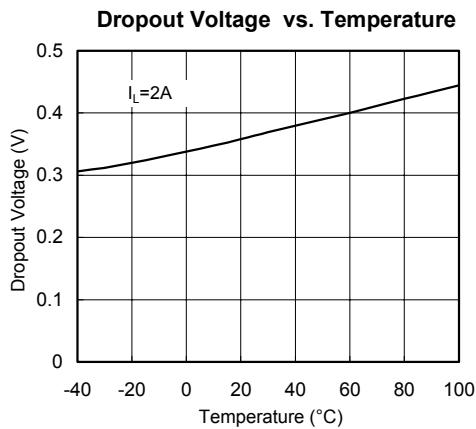
Quiescent Bias Current

Current which is used to operate the regulator chip and is not delivered to the load.

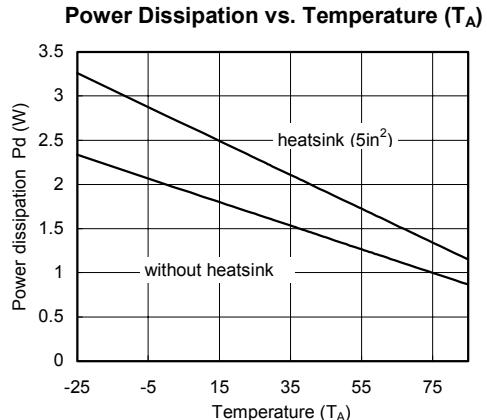
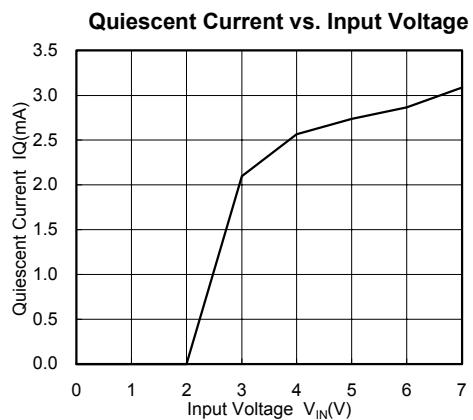
Block Diagram

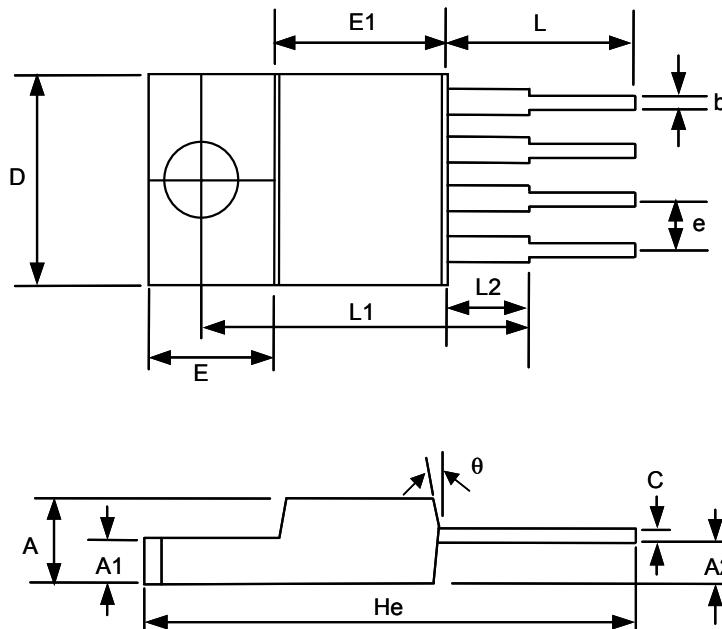


**Typical Performance Characteristics**(V_{IN}=5V, C_{IN}=10μF, C_{OUT} =47μF, T_A=25°C, unless otherwise noted.)**Line Transient Response****Load Transient Response****Short Circuit-Current****Output Noise****Ripple Rejection****Disable- ON**

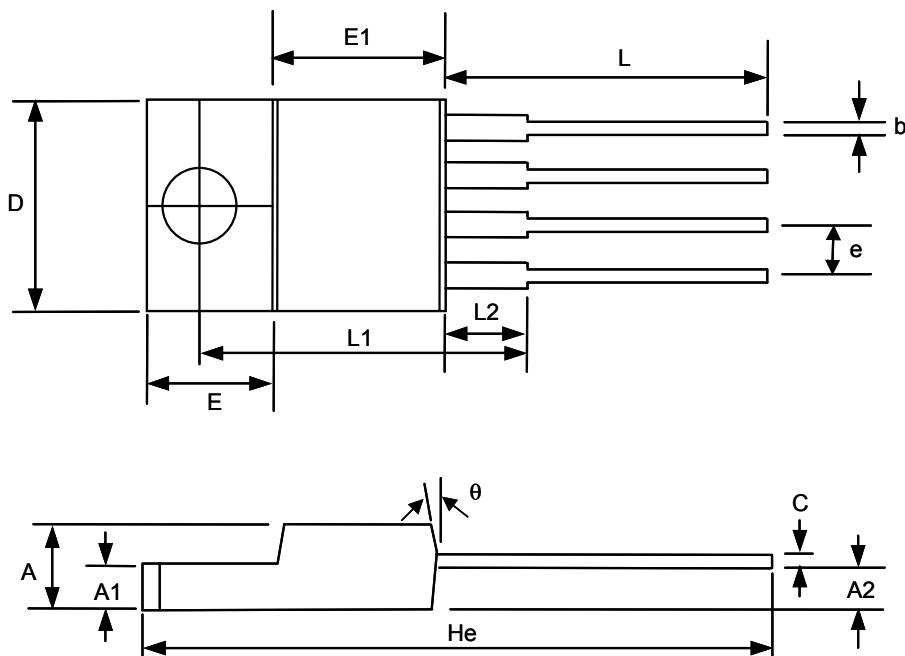
Typical Performance Characteristics (continued)


Typical Performance Characteristics (continued)



Package Information

TO220F-4L Package (short lead)

| SYMBOL | DIMENSION IN MM | | | DIMENSION IN INCH | | |
|--------|-----------------|------------|-------|-------------------|------------|-------|
| | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| A | 4.42 | 4.57 | 4.72 | 0.174 | 0.180 | 0.186 |
| A1 | 2.69 | 2.79 | 2.89 | 0.106 | 0.110 | 0.114 |
| A2 | 1.68 | 1.78 | 1.88 | 0.066 | 0.070 | 0.074 |
| D | 10.00 | 10.10 | 10.20 | 0.394 | 0.398 | 0.402 |
| E | 6.85 | 6.95 | 7.05 | 0.269 | 0.273 | 0.278 |
| E1 | 8.54 | 8.64 | 8.74 | 0.336 | 0.340 | 0.344 |
| L | 8.32 | 8.52 | 8.72 | 0.328 | 0.335 | 0.343 |
| L1 | 16.56 | 16.66 | 16.76 | 0.652 | 0.656 | 0.660 |
| L2 | 3.60 | 3.70 | 3.80 | 0.142 | 0.146 | 0.150 |
| He | 23.72 | 24.22 | 24.72 | 0.934 | 0.953 | 0.93 |
| C | ---- | 0.48 | ---- | ---- | 0.019 | ---- |
| e | ---- | 2.54(TYP) | ---- | ---- | 0.1(TYP) | ---- |
| b | ---- | 0.635(TYP) | ---- | ---- | 0.025(TYP) | ---- |
| θ | 4° | 7° | 11° | 4° | 7° | 11° |


TO220F-4L Package (long lead)

| SYMBOL | DIMENSION IN MM | | | DIMENSION IN INCH | | |
|--------|-----------------|------------|-------|-------------------|------------|-------|
| | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| A | 4.42 | 4.57 | 4.72 | 0.174 | 0.180 | 0.186 |
| A1 | 2.69 | 2.79 | 2.89 | 0.106 | 0.110 | 0.114 |
| A2 | 1.68 | 1.78 | 1.88 | 0.066 | 0.070 | 0.074 |
| D | 10.00 | 10.10 | 10.20 | 0.394 | 0.398 | 0.402 |
| E | 6.85 | 6.95 | 7.05 | 0.269 | 0.273 | 0.278 |
| E1 | 8.54 | 8.64 | 8.74 | 0.336 | 0.340 | 0.344 |
| L | 13.15 | 13.35 | 13.55 | 0.518 | 0.526 | 0.533 |
| L1 | 16.56 | 16.66 | 16.76 | 0.652 | 0.656 | 0.660 |
| L2 | 3.60 | 3.70 | 3.80 | 0.142 | 0.146 | 0.150 |
| He | 28.44 | 28.94 | 29.44 | 1.119 | 1.139 | 1.159 |
| C | ---- | 0.48 | ---- | ---- | 0.019 | ---- |
| e | ---- | 2.54(TYP) | ---- | ---- | 0.1(TYP) | ---- |
| b | ---- | 0.635(TYP) | ---- | ---- | 0.025(TYP) | ---- |
| θ | 4° | 7° | 11° | 4° | 7° | 11° |