

1. SPECIFICATIONS

(1) Absolute Maximum Ratings

(Ta=25°C)

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	I _F	30	mA
Pulse Forward Current	I _{FP}	100	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	120	mW
Operating Temperature	T _{opr}	-30 ~ + 85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Soldering Temperature	T _{sld}	265°C for 10sec.	

I_{FP} Conditions : Pulse Width ≤ 10msec. and Duty ≤ 1/10

(2) Initial Electrical/Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
Forward Voltage	V _F	I _F =20[mA]	-	3.6	4.0	V	
Reverse Current	I _R	V _R = 5[V]	-	-	50	μA	
Luminous Intensity	Rank T	I _v	I _F =20[mA]	1380	1660	1920	mcd
	Rank S	I _v	I _F =20[mA]	960	1160	1380	mcd
	Rank R	I _v	I _F =20[mA]	690	830	960	mcd

* Measurement Uncertainty of the Luminous Intensity : ± 10%

Color Rank (I_F=20mA, Ta=25°C)

	Rank W			
x	0.11	0.11	0.15	0.15
y	0.04	0.10	0.10	0.04

* Measurement Uncertainty of the Color Coordinates : ± 0.01

* One delivery will include up to one color rank and three luminous intensity ranks of the products.

The quantity-ratio of the ranks is decided by Nichia.

2. TYPICAL INITIAL OPTICAL/ELECTRICAL CHARACTERISTICS


Please refer to figure's page.

3. OUTLINE DIMENSIONS AND MATERIALS


Please refer to figure's page.

Material as follows ;
 Resin(Mold) : Epoxy Resin
 Leadframe : Ag plating Copper Alloy

■ Forward Voltage vs. Forward Current

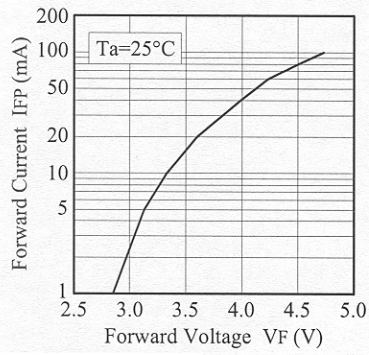

■ Forward Current vs. Relative Luminosity

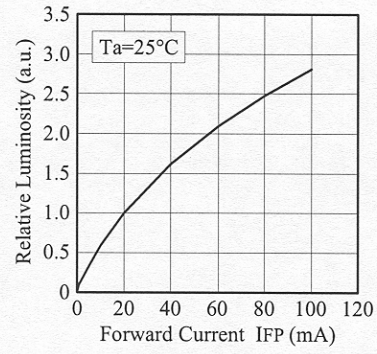

■ Spectrum

