
LED Lamp GL8□□25 series

# GL8□□25 series

## 2.0×3.2mm, Rectangle Type, Colored Transparency LED Lamps for Backlight/Indicator

#### **■** Outline Dimensions

(Unit: mm)

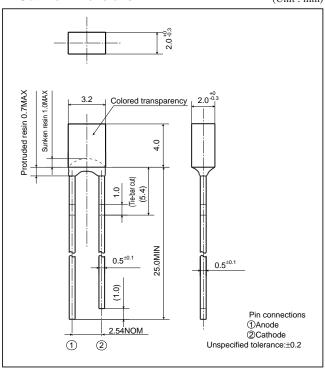

## ■ Absolute Maximum Ratings

(Ta=25°C)

											(1a=23 C)
Model No.	Radiation color	Radiation material	Power dissipation	Forward current Peak forward current IF IFM*1		Derating factor (mA/°C)		Reverse voltage V <sub>R</sub>	Operating temperature $\mathbf{T}_{\mathrm{opr}}$	Storage temperature $T_{\mathrm{stg}}$	Soldering temperature $\mathbf{T_{sol}}^{*2}$
			(mW)	(mA)	(mA)	DC	Pulse	(V)	(°C)	(°C)	(°C)
GL8PR25	Red	GaP	48	20	50	0.27	0.67	5	-25 to +85	-25 to +100	260
GL8HD25	Red	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL8HS25	Sunset orange	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL8HY25	Yellow	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL8EG25	Yellow-green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL8KG25	Green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260

<sup>\*1</sup> Duty ratio=1/10, Pulse width=0.1ms

## **■** Electro-optical Characteristics


(Ta=25°C)


													(1a-23 C)	
Lens type	Model No.	Forward voltage V <sub>F</sub> (V)		Peak emission wavelength		Luminous intensity		Spectrum radiation bandwidth		Reverse current		Terminal capacitance		Page for
				$\lambda_p(nm)$	$\mathbf{I}_{\mathrm{F}}$	Iv(mcd)	$I_{F}$	$\Delta\lambda(nm)$	$I_F$	Ir(µA)	VR	C <sub>t</sub> (pF)	0.077	characteristics
		TYP	MAX	TYP	(mA)	TYP	(mA)	TYP	(mA)	MAX	(V)	TYP	(MHz)	diagrams
Colored transparency	GL8PR25	2.0	2.4	695	10	1.5	10	100	10	10	4	55	1	$\rightarrow$
	GL8HD25	2.0	2.8	635	20	12.0	20	35	20	10	4	20	1	$\rightarrow$
	GL8HS25	2.0	2.8	610	20	10.0	20	35	20	10	4	15	1	$\rightarrow$
	GL8HY25	2.0	2.8	585	20	12.0	20	30	20	10	4	35	1	$\rightarrow$
	GL8EG25	2.1	2.8	565	20	12.0	20	30	20	10	4	35	1	$\rightarrow$
	GL8KG25	2.1	2.8	555	20	9.0	20	25	20	10	4	40	1	$\rightarrow$


(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


<sup>\*2 5</sup>s or less(At the position of 1.6mm or more from the bottom face of resin package)


#### PR series



















## HD series

















Note) Characteristics shown in diagrams are typical values. (not assurance value)


Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


#### HS series



















### HY series

















Note) Characteristics shown in diagrams are typical values. (not assurance value)


Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


#### EG series



















## KG series














Note) Characteristics shown in diagrams are typical values. (not assurance value)

(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.