

GP1S32


Subminiature Photointerrupter

■ Features

1. Ultra-compact package
2. PWB mounting type
3. High sensing accuracy (Slit width : 0.3mm)
4. High speed response

■ Outline Dimensions

(Unit : mm)

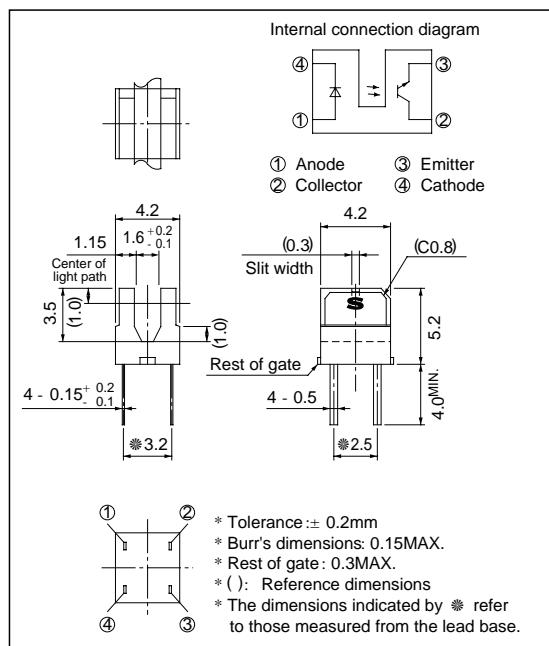

■ Applications


1. Floppy disk drives

■ Absolute Maximum Ratings

(Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Reverse voltage	V _R	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	20	mA
	Collector power dissipation	P _C	75	mW
Total power dissipation		P _{tot}	100	mW
Operating temperature		T _{opr}	- 25 to + 85	°C
Storage temperature		T _{stg}	- 40 to + 100	°C
* ¹ Soldering temperature		T _{sol}	260	°C

*1 For 5 seconds



■ Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Condition	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F = 20mA	-	1.2	1.4	V
	Reverse current	I _R	V _R = 3V	-	-	10	μA
Output	Collector dark current	I _{CEO}	V _{CE} = 20V	-	-	100	nA
Transfer characteristics	Collector current	I _C	V _{CE} = 5V, I _F = 5mA	50	-	300	μA
	Collector-emitter saturation voltage	V _{CE(sat)}	I _F = 10mA, I _C = 50 μA	-	-	0.4	V
	Response time	t _r	V _{CE} = 5V, I _C = 100 μA	-	35	100	μs
	Rise time		R _L = 1 000 Ω	-	35	100	μs
	Fall time	t _f					

Fig. 1 Forward Current vs. Ambient Temperature

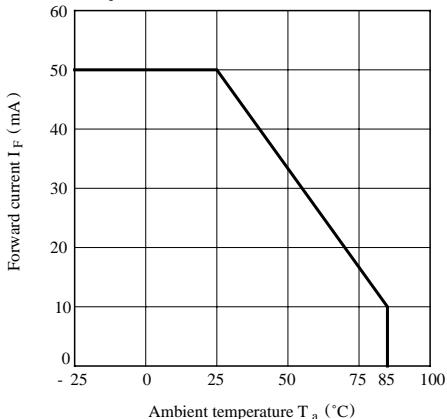


Fig. 2 Power Dissipation vs. Ambient Temperature

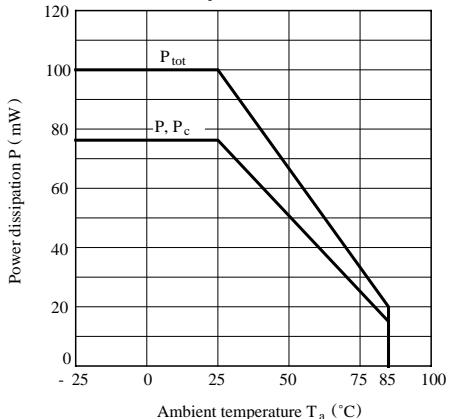


Fig. 3 Forward Current vs. Forward Voltage



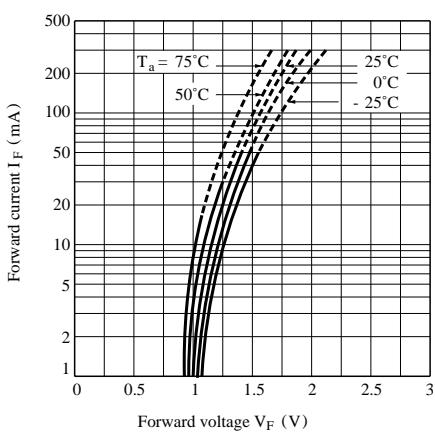



Fig. 4 Collector Current vs. Forward Current

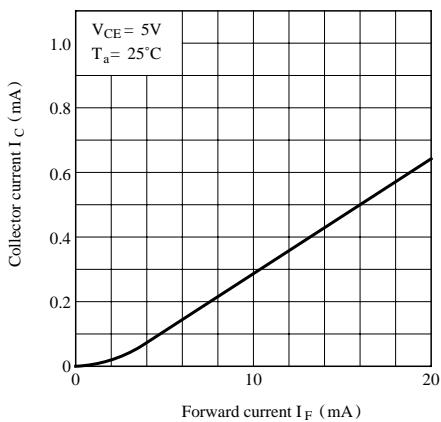


**Fig. 5 Collector Current vs.
Collector-emitter Voltage**

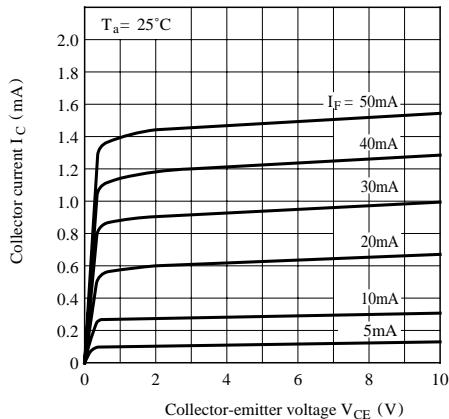


**Fig. 6 Collector Current vs.
Ambient Temperature**

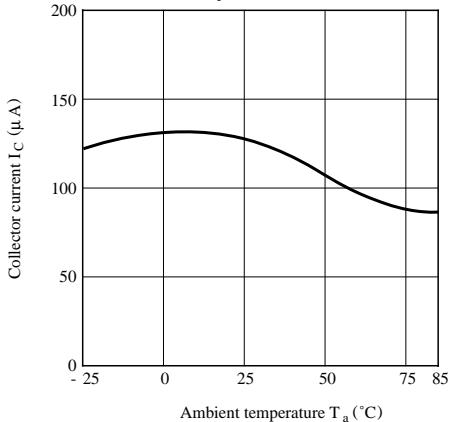


**Fig. 7 Collector-emitter Saturation Voltage vs.
Ambient Temperature**

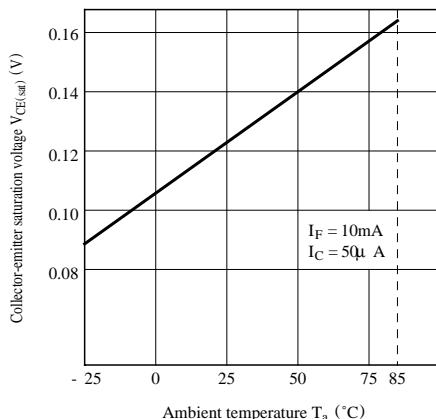


**Fig. 8 Collector Dark Current vs.
Ambient Temperature**

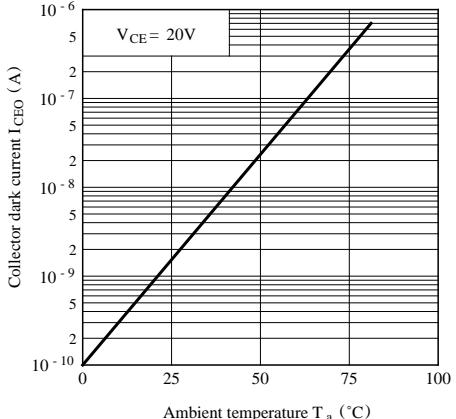

**Fig. 9 Response Time vs.
Load Resistance**

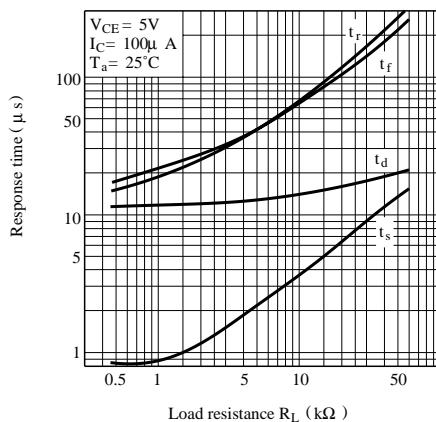


Test Circuit for Response Time

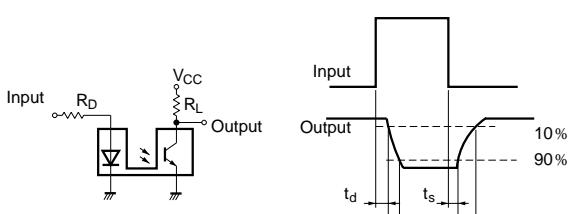


10% 90%

**Fig.10 Relative Collector Current vs.
Shield Distance (1)**

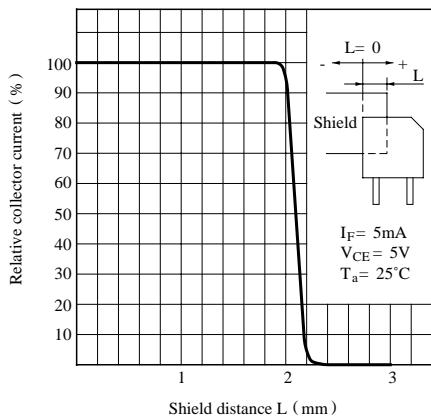

**Fig.11 Relative Collector Current vs.
Shield Distance (2)**

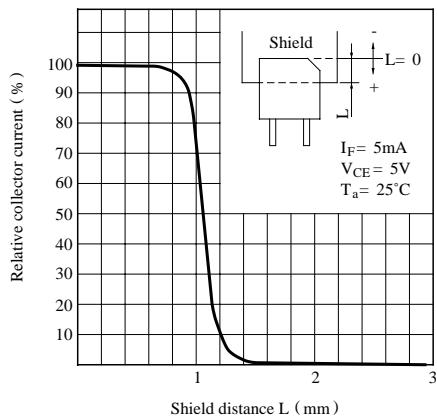

- Please refer to the chapter “Precautions for Use”.