

BILATERAL SWITCH

FEATURES

- 250MHz-3dB bandwidth.
- Super High Speed $t_{PD}=2.7\text{nS}(\text{Typ.})$ at $V_{CC}=5\text{V}$.
- On Resistance $R_{OH}=3\ \Omega(\text{Typ.})$ at $V_{CC}=4.5\text{V}$
($V_{IN}=0\text{V}, I_{IN}=30\text{mA.}$)
- Wide Operating Voltage Range : $V_{CC(\text{opr})}=1.65\sim 5.5\text{V}$.
- T.H.D : THD=0.11% Typ.) at $V_{CC}=5\text{V}$.

MAXIMUM RATINGS ($T_a=25\ ^\circ\text{C}$)


CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Supply Voltage	V_{CC}	-0.5~7.0	V
Control Input Voltage	V_{IN}	-0.5~7.0	V
Switch I/O Voltage	$V_{I/O}$	-0.5~7.0	V
Control Diode Current	I_{CK}	-50	mA
Output Diode Current	I_{OK}	± 50	mA
DC V_{CC} /Ground Current	I_{CC}	± 100	mA
Power Dissipation	P_D	200	mW
Storage Temperature Range	T_{stg}	-65~150	$^\circ\text{C}$
Lead Temperature (10s)	T_L	260	$^\circ\text{C}$

Logic Diagram




TRUTH TABLE


CONTROL	SWITCH FUNCTION
H	ON
L	OFF

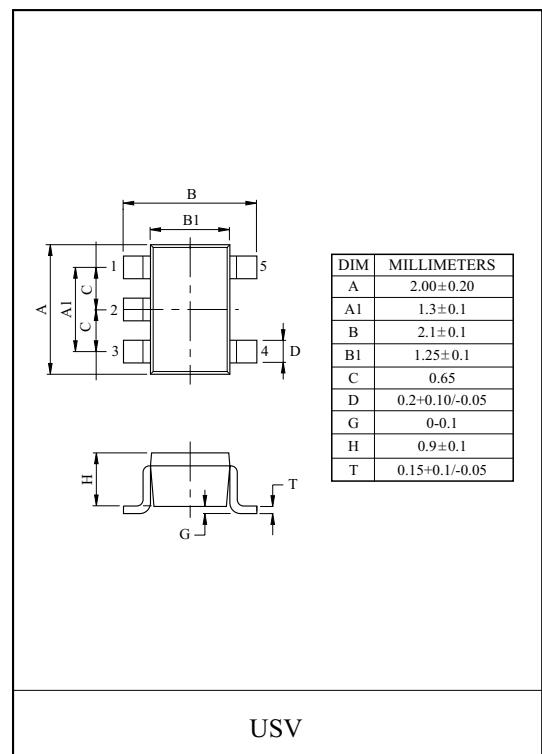

MARKING

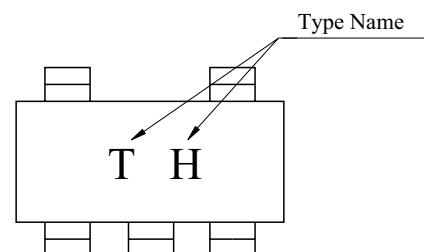

PIN CONNECTION(TOP VIEW)

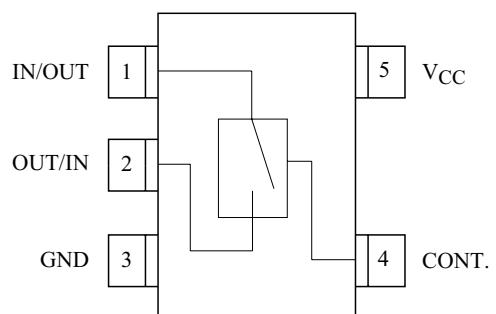

KIC7SZ66FU

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC}	1.65~5.5	V
Control Input Voltage	V _{IN}	0~5.5	V
Switch I/O Voltage	V _{I/O}	0~V _{CC}	V
Operating Temperature	T _{opr}	-40~85	°C
Input Rise and Fall Time	t _r , t _f	0~10 (V _{CC} =2.3~3.6V) 0~5 (V _{CC} =4.5~5.5V)	nS/V

ELECTRICAL CHARACTERISTICS

DC Characteristics

CHARACTERISTIC	SYMBOL	TEST CONDITION		Ta=25 °C			Ta=-40~85 °C			UNIT
		V _{CC} (V)	MIN.	TYP.	MAX.	MIN.	TYP. (Note4)	MAX.		
Input Voltage	High Level V _{IH}	-	1.65~1.95	-	-	-	0.75 × V _{CC}	-	-	V
			2.3~5.5	-	-	-	0.7 × V _{CC}	-	-	
	Low Level V _{IL}	-	1.65~1.95	-	-	-	-	-	0.25 × V _{CC}	
			2.3~5.5	-	-	-	-	-	0.3 × V _{CC}	
Switch On Resistance (Note 1)	R _{ON}	V _{IN} =0V, I _{IN} =30mA	4.5	-	-	-	-	3	7	μA
		V _{IN} =2.4V, I _{IN} =15mA		-	-	-	-	5	12	V
		V _{IN} =4.5V, I _{IN} =30mA		-	-	-	-	7	15	
		V _{IN} =0V, I _{IN} =24mA	3.0	-	-	-	-	4	9	
		V _{IN} =3V, I _{IN} =24mA		-	-	-	-	10	20	
		V _{IN} =0V, I _{IN} =8mA	2.3	-	-	-	-	5	12	
		V _{IN} =2.3V, I _{IN} =8mA		-	-	-	-	13	30	
		V _{IN} =0V, I _{IN} =4mA	1.8	-	-	-	-	7	28	
		V _{IN} =1.8V, I _{IN} =4mA		-	-	-	-	25	60	
On Resistance Flatness (Note 1) (Note 2) (Note 3)	R _{flat}	I _A =-30mA, 0 ≤ V _{Bn} ≤ V _{CC}	5.0	-	6	-	-	-	-	Ω
		I _A =-24mA, 0 ≤ V _{Bn} ≤ V _{CC}	3.3	-	12	-	-	-	-	
		I _A =-8mA, 0 ≤ V _{Bn} ≤ V _{CC}	2.5	-	28	-	-	-	-	
		I _A =-4mA, 0 ≤ V _{Bn} ≤ V _{CC}	1.8	-	125	-	-	-	-	
Input Leakage Current	I _{IN}	0 ≤ V _{IN} ≤ 5.5V	0~5.5	-	-	-	-	±0.05	±1.0	μA
Power Off Leakage Current	I _{OFF}	0 ≤ A, B ≤ V _{CC}	1.65~5.5	-	-	-	-	±0.05	±10.0	μA
Quiescent Supply Current	I _{CC}	V _{IN} =V _{CC} or GND I _{OUT} =0	1.65~5.5	-	-	-	-	0.05	10	μA

Note1 : Measured by the voltage drop between A and B pins at the indicated current through the switch. On Resistance is determined by the lower of the voltages on the two (A or B) pins.

Note2 : Parameter is characterized but not tested in production.

Note3 : Flatness is defined as the difference between the maximum and minimum value of On Resistance over the specified range of conditions.

Note4 : All typical values are at the specified V_{CC}, and Ta=25 °C

KIC7SZ66FU

AC Characteristics


CHARACTERISTIC	SYMBOL	TEST CONDITION		Ta=-40°C~85°C, C _L =50pF, R _U =R _D =500Ω			UNIT
			V _{CC} (V)	MIN.	TYP.	MAX.	
Propagation Delay Bus to Bus (Figures 1,2)	t _{PHL} t _{PLH}	V _{IN} =OPEN	1.65~1.95	-	-	4.3	ns
			2.3~2.7	-	-	1.2	
			3.0~3.6	-	-	0.8	
			4.5~5.5	-	-	0.3	
Output Enable Time (Figures 1,2)	t _{PZL} t _{PZH}	V _{IN} =2×V _{CC} for t _{PZL} V _{IN} =0V for t _{PZH}	1.65~1.95	1.5	7.0	14.2	ns
			2.3~2.7	1.5	3.3	7.0	
			3.0~3.6	1.5	2.4	5.5	
			4.5~5.5	1.5	2.0	4.5	
Output Disable Time (Figures 1,2)	t _{PLZ} t _{PHZ}	V _{IN} =2×V _{CC} for t _{PLZ} V _{IN} =0V for t _{PHZ}	1.65~1.95	1.5	9.2	18.2	ns
			2.3~2.7	1.5	5.3	9.0	
			3.0~3.6	1.5	4.0	7.0	
			4.5~5.5	1.5	2.7	5.0	
Charge Injection (Figures 3)	Q	C _L =0.1nF, V _{GEN} =0V, R _{GEN} =0Ω, f=1MHz	1.65~5.5	-	0.05	-	pC
Off Isolation (Figures 4)	OIRR	R _L =50Ω, C _L =5pF, f=10MHz	1.65~5.5	-	-50	-	dB
-3dB Bandwidth (Figures 5)	BW	R _L =50Ω	1.65~5.5	-	>250	-	MHz
Total Harmonic Distortion	THD	R _L =600Ω, 0.5V _{P-P} f=600Hz~20kHz	5	-	0.011	-	%

Capacitance

Symbol	Parameter	Typ.	Max.	Units	Conditions
C _{IN}	Control Pin Input Capacitance	2		pF	V _{CC} =0V
C _{I/O}	Input/Output Capacitance	6		pF	V _{CC} =5.0V

KIC7SZ66FU

AC Loading and Waveforms

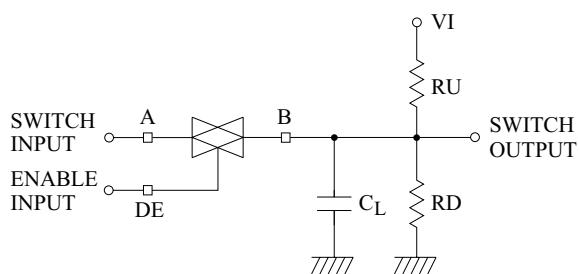

Input driven by 50Ω source terminated in 50Ω
 C_L includes load and stray capacitance.
 Input PRR=1.0MHz ; t_w =500ns

FIGURE 1. AC Test Circuit

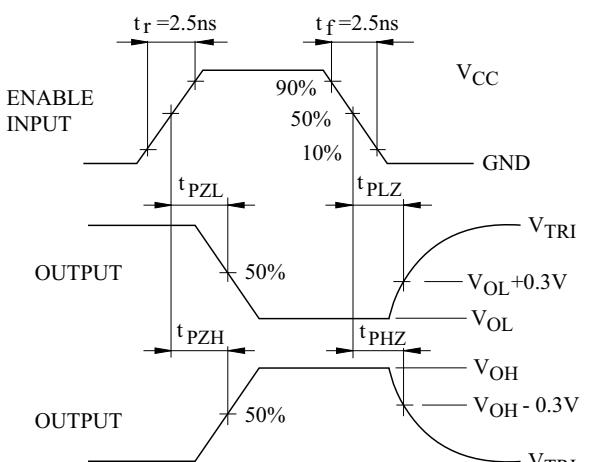
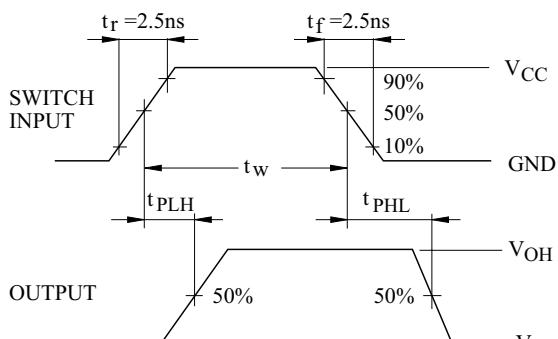


FIGURE 2. AC Waveforms

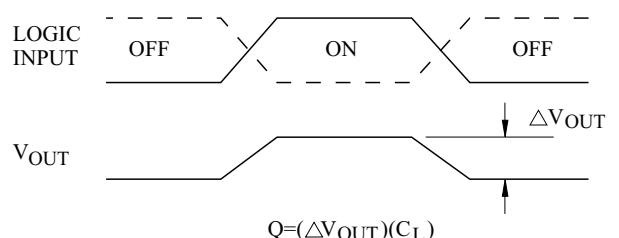
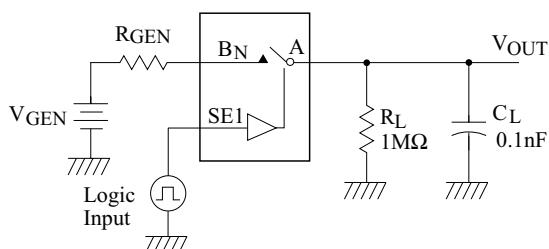


FIGURE 3. Charge Injection Test

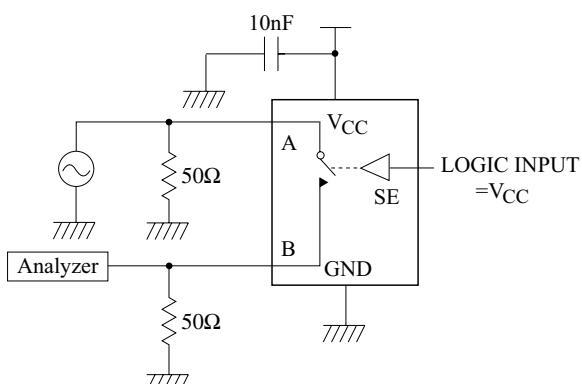


FIGURE 4. Off Isolation

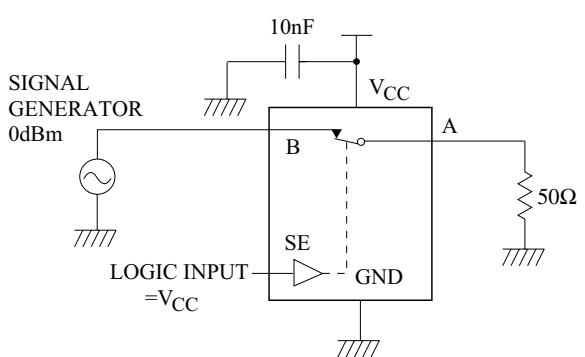


FIGURE 5. Bandwidth