


# FRD Type : KSF60A60B

OUTLINE DRAWING

## FEATURES

- \* Similar to TO-247AC(TO-3P)Case
- \* Ultra-Fast Recovery
- \* Low Forward Voltage Drop
- \* Low Power Loss,High Efficiency
- \* High Surge Current Capability

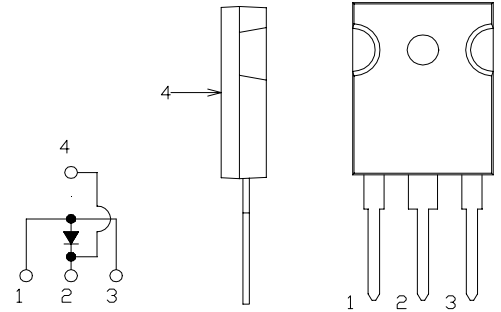

## Maximum Ratings

Approx Net Weight: 5.55g

Rating	Symbol	KSF60A60B			Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$	600			V
Average Rectified Output Current *1	$I_O$	60	$T_c=57^\circ\text{C}$	50 Hz half Sine Wave Resistive Load	A
RMS Forward Current	$I_{F(RMS)}$	34.2			A
Surge Forward Current	$I_{FSM}$	600	50Hz Half Sine Wave ,1cycle Non-repetitive		A
Operating JunctionTemperature Range	$T_{jw}$	-40 to +150			$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-40 to +150			$^\circ\text{C}$
Mounting torque	$F_{tor}$	recommended torque = 0.5			$\text{N}\cdot\text{m}$

\*1:Anode Terminals 1 and 3 Connected


## Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	$I_{RM}$	$T_j= 25^\circ\text{C}, V_{RM}= V_{RRM}$	-	-	50	$\mu\text{A}$
Peak Forward Voltage *1	$V_{FM}$	$T_j= 25^\circ\text{C}, I_{FM}= 60 \text{ A}$	-	-	1.7	V
Reverse Recovery Time	trr	$I_{FM}= 10\text{A},$ $-di/dt=50\text{A}/\mu\text{s}, T_a=25^\circ\text{C}$			75	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	1.4	$^\circ\text{C}/\text{W}$


\*1:Anode Terminals 1 and 3 Connected




FORWARD CURRENT VS. VOLTAGE

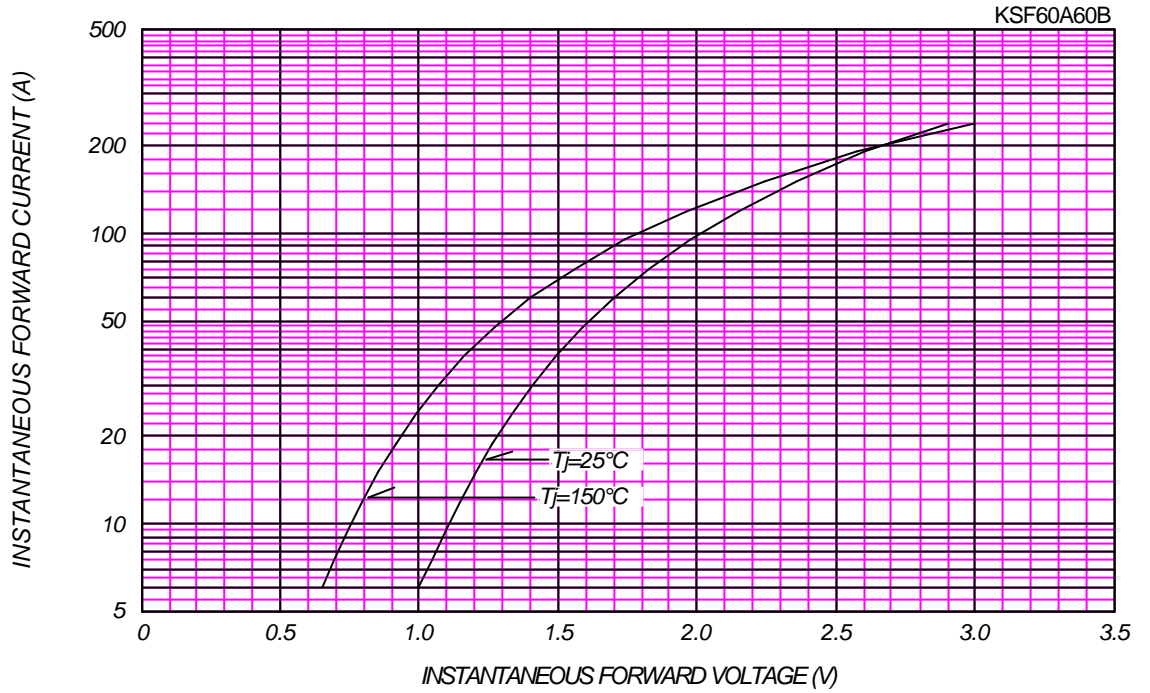


AVERAGE FORWARD POWER DISSIPATION

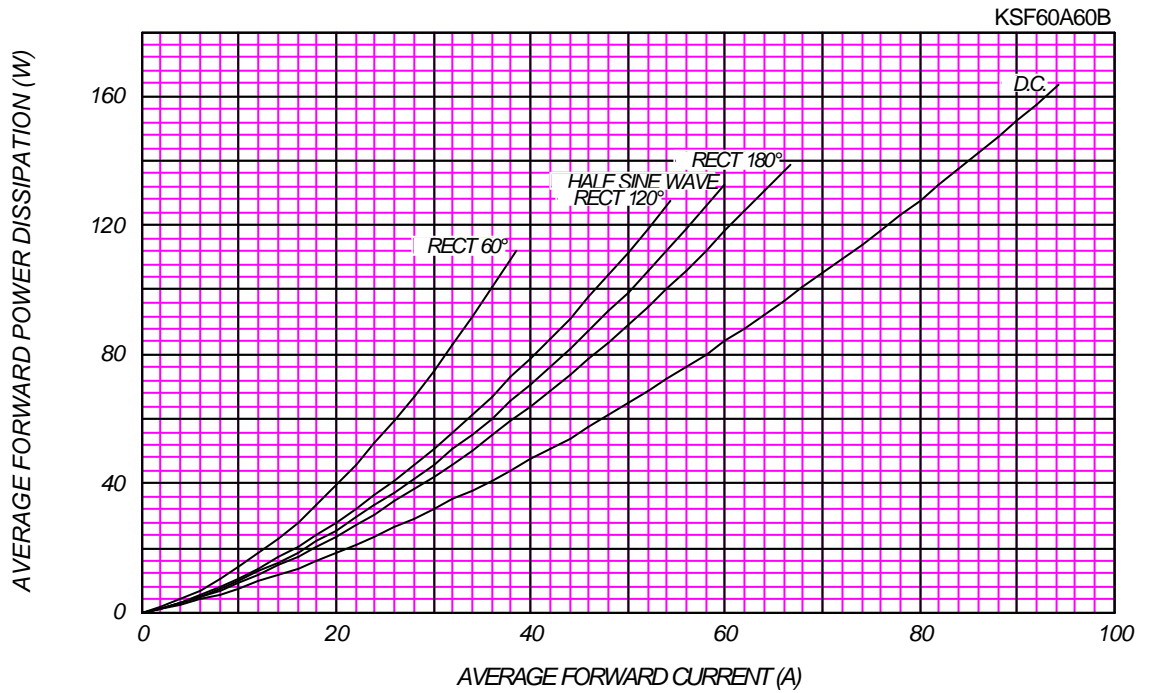



AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

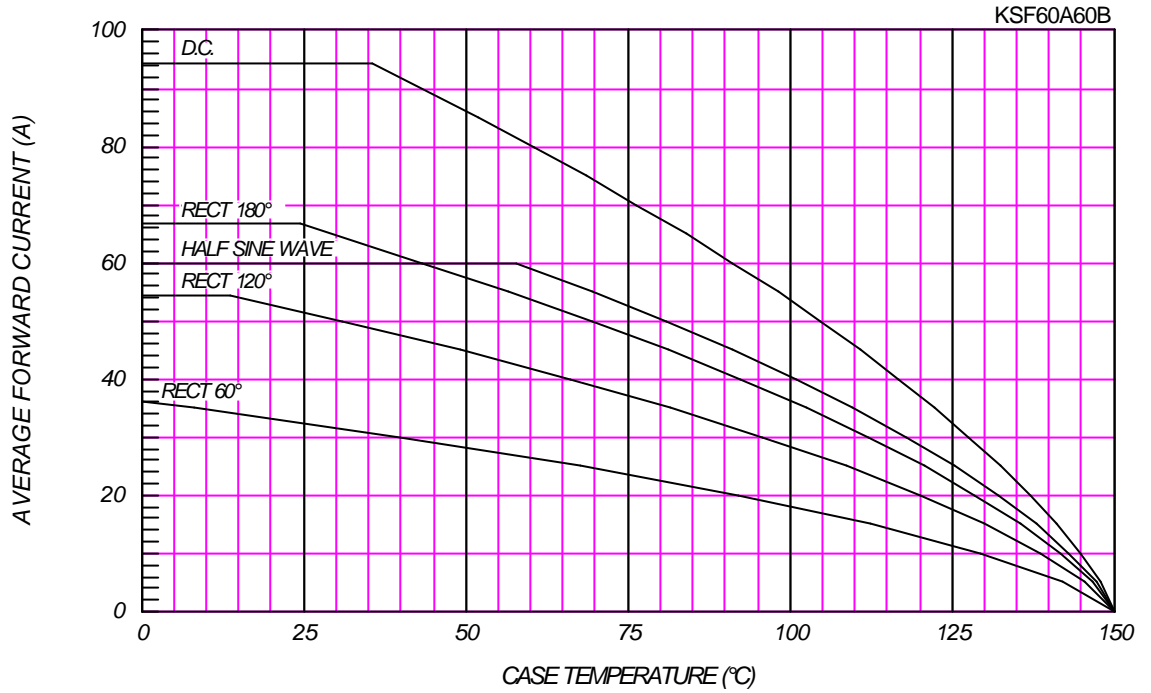

SURGE CURRENT RATINGS

f=50Hz, Half Sine Wave, Non-Repetitive, No Load

