

L-383EDT

ORANGE


Features

- LOW POWER CONSUMPTION.
- ULTRA BRIGHTNESS IS AVAILABLE.
- RELIABLE AND RUGGED.
- EXCELLENT UNIFORMITY OF LIGHT OUTPUT.
- SUITABLE FOR LEVEL INDICATOR.
- LONG LIFE - SOLID STATE RELIABILITY.

Description

The Orange source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

Package Dimensions

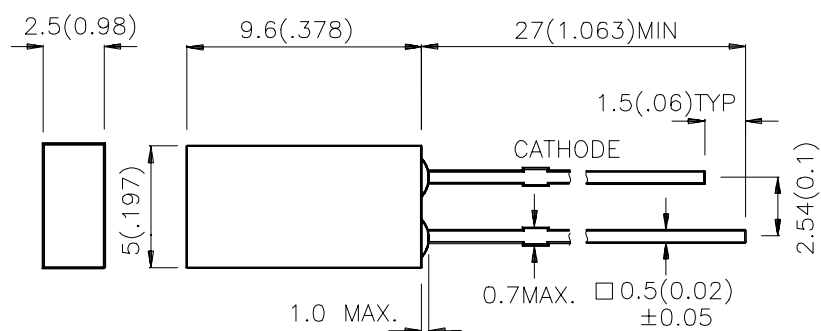

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 (0.01") unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

Selection Guide

| Part No. | Dice | Lens Type | Iv (mcd) @ 10 mA | | Viewing Angle |
|----------|--------------------|-----------------|---------------------|------|------------------|
| | | | Min. | Typ. | 2θ1/2 |
| L-383EDT | ORANGE (GaAsP/GaP) | ORANGE DIFFUSED | 3 | 5 | 110° |

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25°C


| Symbol | Parameter | Device | Typ. | Max. | Units | Test Conditions |
|-------------------|-------------------------|--------|------|------|-------|---------------------------|
| λ _{peak} | Peak Wavelength | Orange | 627 | | nm | I _F =20mA |
| λ _D | Dominate Wavelength | Orange | 625 | | nm | I _F =20mA |
| Δλ _{1/2} | Spectral Line Halfwidth | Orange | 45 | | nm | I _F =20mA |
| C | Capacitance | Orange | 15 | | pF | V _F =0V;f=1MHz |
| V _F | Forward Voltage | Orange | 2.0 | 2.5 | V | I _F =20mA |
| I _R | Reverse Current | Orange | | 10 | μA | V _R = 5V |

Absolute Maximum Ratings at T_A=25°C

| Parameter | Orange | Units |
|-------------------------------|---------------------|-------|
| Power dissipation | 105 | mW |
| DC Forward Current | 30 | mA |
| Peak Forward Current [1] | 160 | mA |
| Reverse Voltage | 5 | V |
| Operating/Storage Temperature | -40°C To +85°C | |
| Lead Solder Temperature [2] | 260°C For 5 Seconds | |

Notes:

- 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2mm below package base.

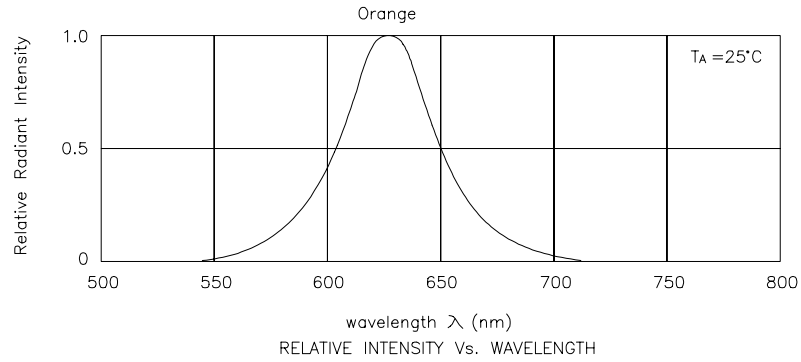

Orange

L-383EDT

