

# SAW Components

Data Sheet L 9353 M





## SAW Components L 9353 M IF Filter for Audio Applications 33,90 MHz

**Data Sheet** 

#### Standard

■ L

#### **Features**


■ TV IF audio filter with pass band for sound carrier at 40,40 MHz

#### **Terminals**

■ Tinned CuFe alloy

### Plastic package SIP5K






Dimensions in mm, approx. weight 1,0 g

#### Pin configuration

- 1 Input
- 2 Input ground
- 3 Chip carrier ground
- 4 Output
- 5 Output



Туре	Ordering code	Marking and package according to	Packing according to
L 9353 M	B39339-L9353-M100	C61157-A1-A15	F61074-V8067-Z000

#### **Maximum ratings**

Operable temperature range	$T_{A}$	-25/+65	°C	
Storage temperature range	$T_{ m stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	5	V	between any terminals
AC voltage	$V_{\sf pp}$	10	V	between any terminals



SAW Components L 9353 M

#### **IF Filter for Audio Applications**

33,90 MHz

**Data Sheet** 

Characteristics

 $T_{A} = 25 \,^{\circ}\text{C}$   $Z_{S} = 50 \,\Omega$   $Z_{L} = 2 \,\text{k}\Omega \parallel 3 \,\text{pF}$ Reference temperature: Terminating source impedance:

Terminating load impedance:

				min.	typ.	max.	
Insertion attenuation							
Reference level for the	40,40	MHz		8,3	9,8	11,3	dB
following data							
Relative attenuation			$\alpha_{rel}$				
Picture carrier	33,90	MHz		45,0	55,0	_	dB
Adjacent sound carrier 32,40		MHz		48,0	62,0	_	dB
Adjacent picture carrier 41,90 MHz				35,0	40,0	_	dB
Lower sidelobe	25,00 32,40	MHz		48,0	56,0	_	dB
Upper sidelobe	41,90 45,00	MHz		30,0	38,0	<u> </u>	dB
Impedance at 40,40 Mi	Hz						
Input:	$Z_{\text{IN}} = R_{\text{IN}}    C_{\text{II}}$	N		_	0,6    9,3	_	$k\Omega \parallel pF$
Output	$: Z_{OUT} = R_{OUT} \parallel C_{O}$	DUT		_	2,0    3,1	_	kΩ    pF
Temperature coefficient of frequency			$TC_{f}$	_	-72	_	ppm/K



SAW Components


L 9353 M


**IF Filter for Audio Applications** 

33,90 MHz

**Data Sheet** 

#### Frequency response

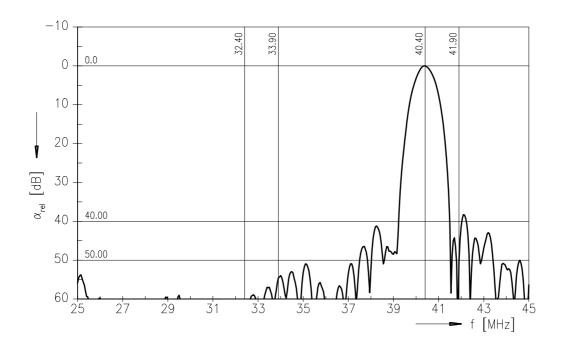

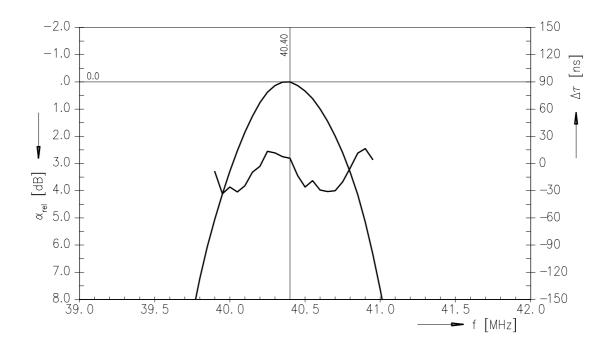



SAW Components L 9353 M

**IF Filter for Audio Applications** 

33,90 MHz

**Data Sheet** 

#### Published by EPCOS AG Surface Acoustic Wave Components Division, SAW CE MM PD P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.