


LR7800 Series3-Terminal 1A Positive Voltage Regulators

DESCRIPTION

The LRC LR78XX family is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 1 A.

FEATURES

- *Output current up to 1A
- *Fixed output voltage of 5V, 6V, 7V, 8V, 9V, 10V, 12V, 15V, 18V and 24V available
- *Thermal overload shutdown protection
- *Short circuit current limiting

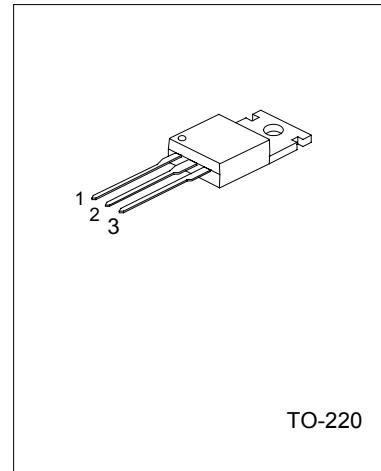


1: Input 2: GND 3: Output

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNIT
Input voltage (for $V_o=5\sim 18V$) (for $V_o=24V$)	V_i	35 40	V
Output Current	I_o	1	A
Power Dissipation	P_D	Internally Limited	W
Thermal Resistance Junction-Air	$R_{\theta JA}$	65	°C/W
Thermal Resistance Junction-Cases	$R_{\theta JC}$	5	°C/W
Operating Junction Temperature Range	T_{opr}	0 ~ +150	°C
Storage Temperature Range	T_{stg}	-55 ~ +150	°C

APPLICATION CIRCUIT

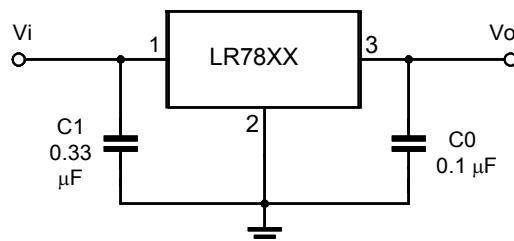

Note 1: To specify an output voltage, substitute voltage value for "XX".

Note 2: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

LR7800 Series3-Terminal 1A Positive Voltage Regulators

LR7805 ELECTRICAL CHARACTERISTICS

(VI=10V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	4.80	5.0	5.20	V
		VI =7.5V to 20V, Io=5mA - 1.0A,Pd≤15W	4.75		5.25	V
Load Regulation	ΔVo	Tj=25°C,Io=5mA - 1.0A		9	100	mV
		Tj=25°C,Io=0.25A - 0.75A		4	50	mV
Line regulation	ΔVo	VI =7V to 25V,Tj=25°C			100	mV
		VI =8V to 12V,Tj=25°C			50	mV
Quiescent Current	Iq	Tj=25°C, Io≤1.0A			8.0	mA
Quiescent Current Change	ΔIq	VI =7.5V to 20V			1.3	mA
		Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz≤f≤100kHz		42		μV
Ripple Rejection	RR	VI =8V - 18V,f=120Hz,Tj=25°C	62	73		dB
Peak Output Current	IPK	Tj=25°C		1.8		A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		250		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

LR7806 ELECTRICAL CHARACTERISTICS

(VI=11V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	5.75	6.0	6.25	V
		VI =8.5V to 21V, Io=5mA - 1.0A, PD≤15W	5.70		6.30	V
Load Regulation	ΔVo	Tj=25°C,Io=5mA - 1.0A			120	mV
		Tj=25°C,Io=0.25A - 0.75A			60	mV
Line regulation	ΔVo	VI =8V to 25V,Tj=25°C			120	mV
		VI =8.5V to 21V,Tj=25°C,Io=1.0A			60	mV
Quiescent Current	Iq	Tj=25°C, Io≤1.0A			8.0	mA
Quiescent Current Change	ΔIq	VI =8.5V to 21V			1.3	mA
		Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz≤f≤100kHz		45		μV
Ripple Rejection	RR	VI =9V - 19V,f=120Hz,Tj=25°C	59	75		dB
Peak Output Current	IPK	Tj=25°C		1.8		A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		550		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

LR7800 Series3-Terminal 1A Positive Voltage Regulators

LR7807 ELECTRICAL CHARACTERISTICS

(VI=13V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	6.72	7.0	7.28	V
		VI =9.5V to 22V, Io=5mA - 1.0A, PD ≤ 15W	6.65		7.35	V
Load Regulation	ΔVo	Tj=25°C,Io=5mA - 1.0A			120	mV
		Tj=25°C,Io=0.25A - 0.75A			60	mV
Line regulation	ΔVo	VI =9V to 25V,Tj=25°C			120	mV
		VI =9.5V to 22V,Tj=25°C,Io=1.0A			60	mV
Quiescent Current	Iq	Tj=25°C, Io ≤ 1.0A			8.0	mA
Quiescent Current Change	ΔIq	VI =9.5V to 22V			1.0	mA
		Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz ≤ f ≤ 100kHz		50		μV
Ripple Rejection	RR	VI =10V - 20V,f=120Hz,Tj=25°C	59	75		dB
Peak Output Current	IPK	Tj=25°C			1.7	A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		250		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

LR7808 ELECTRICAL CHARACTERISTICS

(VI=14V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	7.68	8.0	8.32	V
		VI =10.5V to 23V, Io=5mA - 1.0A, PD ≤ 15W	7.60		8.40	V
Load Regulation	ΔVo	Tj=25°C,Io=5mA - 1.0A			160	mV
		Tj=25°C,Io=0.25A - 0.75A			80	mV
Line regulation	ΔVo	VI =10.5V to 25V,Tj=25°C			160	mV
		VI =10.5V to 23V, Tj=25°C,Io=1.0A			80	mV
Quiescent Current	Iq	Tj=25°C, Io ≤ 1.0A			8.0	mA
Quiescent Current Change	ΔIq	VI =10.5V to 23V			1.0	mA
		Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz ≤ f ≤ 100kHz		52		μV
Ripple Rejection	RR	VI =11.5V to 21.5V, f=120Hz,Tj=25°C	56	72		dB
Peak Output Current	IPK	Tj=25°C		1.8		A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		450		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

LR7800 Series3-Terminal 1A Positive Voltage Regulators

LR7809 ELECTRICAL CHARACTERISTICS

($V_I=15V$, $I_O=0.5A$, $T_j=0^\circ C - 125^\circ C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^\circ C$, $I_o=5mA - 1.0A$	8.64	9.0	9.36	V
		$V_I = 11.5V$ to 24V, $I_o=5mA - 1.0A, P_D \leq 15W$	8.55		9.45	V
Load Regulation	ΔV_o	$T_j=25^\circ C, I_o=5mA - 1.0A$			180	mV
		$T_j=25^\circ C, I_o=0.25A - 0.75A$			90	mV
Line regulation	ΔV_o	$V_I = 11.5V$ to 25 V, $T_j=25^\circ C$			180	mV
		$V_I = 11.5V$ to 24V, $T_j=25^\circ C$, $I_o=1.0A$			90	mV
Quiescent Current	I_q	$T_j=25^\circ C$, $I_o \leq 1.0A$			8.0	mA
Quiescent Current Change	ΔI_q	$V_I = 11.5V$ to 24V			1.0	mA
		$I_o=5mA - 1.0A$			0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		58		μV
Ripple Rejection	RR	$V_I = 12.5V$ to 22.5V, $f=120Hz, T_j=25^\circ C$	56	70		dB
Peak Output Current	I_{PK}	$T_j=25^\circ C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_j=25^\circ C$		400		mA
Dropout Voltage	V_d	$T_j=25^\circ C$		2.0		V

LR7810 ELECTRICAL CHARACTERISTICS

($V_I=16V$, $I_O=0.5A$, $T_j=0^\circ C - 125^\circ C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^\circ C$, $I_o=5mA - 1.0A$	9.60	10.0	10.40	V
		$V_I = 12.5V$ to 25V, $I_o=5mA - 1.0A, P_D \leq 15W$	9.50		10.50	V
Load Regulation	ΔV_o	$T_j=25^\circ C, I_o=5mA - 1.0A$			200	mV
		$T_j=25^\circ C, I_o=0.25A - 0.75A$			100	mV
Line regulation	ΔV_o	$V_I = 13V$ to 25V, $T_j=25^\circ C$			200	mV
		$V_I = 13V$ to 25V, $T_j=25^\circ C, I_o=1.0A$			100	mV
Quiescent Current	I_q	$T_j=25^\circ C$, $I_o \leq 1.0A$			8.0	mA
Quiescent Current Change	ΔI_q	$V_I = 12.6V$ to 25V			1.0	mA
		$I_o=5mA - 1.0A$			0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		58		μV
Ripple Rejection	RR	$V_I = 13V - 23V, f=120Hz, T_j=25^\circ C$	56	71		dB
Peak Output Current	I_{PK}	$T_j=25^\circ C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_j=25^\circ C$		400		mA
Dropout Voltage	V_d	$T_j=25^\circ C$		2.0		V

LR7800 Series3-Terminal 1A Positive Voltage Regulators

LR7812 ELECTRICAL CHARACTERISTICS

(VI=19V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	11.5	12.0	12.5	V
		Vi =14.5V to 27V, Io=5mA - 1.0A,PD≤15W	11.4		12.60	V
Load Regulation	ΔVo	Tj=25°C, Io=5mA - 1.0A			240	mV
		Tj=25°C, Io=0.25A - 0.75A			120	mV
Line regulation	ΔVo	Vi =14.5V to 30V, Tj=25°C			240	mV
		Vi =14.6V to 27V, Tj=25°C, Io=1.0A			120	mV
Quiescent Current	Iq	Tj=25°C, Io ≤ 1.0A			8.0	mA
Quiescent Current Change	ΔIq	Vi =14.5V to 30V			1.0	mA
		Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz ≤ f ≤ 100kHz		76		μV
Ripple Rejection	RR	Vi =15V - 25V, f=120Hz, Tj=25°C	55	71		dB
Peak Output Current	IPK	Tj=25°C			1.8	A
Short-Circuit Current	Isc	Vi=35V, Tj=25°C			230	mA
Dropout Voltage	Vd	Tj=25°C			2.0	V

LR7815 ELECTRICAL CHARACTERISTICS

(VI=23V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	14.40	15.0	15.60	V
		Vi =17.5V to 30V, Io=5mA - 1.0A,PD≤15W	14.25		15.75	V
Load Regulation	ΔVo	Tj=25°C, Io=5mA - 1.0A			300	mV
		Tj=25°C, Io=0.25A - 0.75A			150	mV
Line regulation	ΔVo	Vi =18.5V to 30V, Tj=25°C			300	mV
		Vi =17.7V to 30V, Tj=25°C, Io = 1.0A			150	mV
Quiescent Current	Iq	Tj=25°C, Io ≤ 1.0A			8.0	mA
Quiescent Current Change	ΔIq	Vi =17.5V to 30V			1.0	mA
		Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz ≤ f ≤ 100kHz		90		μV
Ripple Rejection	RR	Vi =18.5V to 28.5V f=120Hz, Tj=25°C	54	70		dB
Peak Output Current	IPK	Tj=25°C			1.8	A
Short-Circuit Current	Isc	Vi=35V, Tj=25°C			230	mA
Dropout Voltage	Vd	Tj=25°C			2.0	V

LR7800 Series3-Terminal 1A Positive Voltage Regulators

LR7818 ELECTRICAL CHARACTERISTICS

(VI=27V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	17.28	18.0	18.72	V
		VI =21V to 33V, Io=5mA - 1.0A, PD≤ 15W	17.10		18.90	V
Load Regulation	ΔVo	Tj=25°C,Io=5mA - 1.0A			360	mV
		Tj=25°C,Io=0.25A - 0.75A			180	mV
Line regulation	ΔVo	VI =21V to 33V,Tj=25°C			360	mV
		VI =21V to 33V, Tj=25°C, Io =1.0A			180	mV
Quiescent Current	Iq	Tj=25°C, Io≤ 1.0A			8.0	mA
Quiescent Current Change	ΔIq	VI =21.5V to 33V			1.0	mA
		Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz≤f≤100kHz		110		μV
Ripple Rejection	RR	VI =22V - 32V,f=120Hz,Tj=25°C	53	69		dB
Peak Output Current	IPK	Tj=25°C			1.8	A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		200		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V


LR7824 ELECTRICAL CHARACTERISTICS

(VI=33V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	23.04	24.0	24.96	V
		VI =27V to 38V, Io=5mA - 1.0A, ,PD≤ 15W	22.80		25.20	V
Load Regulation	ΔVo	Tj=25°C,Io=5mA - 1.0A			360	mV
		Tj=25°C,Io=0.25A - 0.75A			240	mV
Line regulation	ΔVo	VI =27V to 38V,Tj=25°C			360	mV
		VI =27V to 38V,Tj=25°C,Io=1.0A			240	mV
Quiescent Current	Iq	Tj=25°C, Io≤ 1.0A			8.0	mA
Quiescent Current Change	ΔIq	VI =28V to 38V			1.0	mA
		Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz≤f≤100kHz		170		μV
Ripple Rejection	RR	VI =28V - 38V,f=120Hz,Tj=25°C	50	66		dB
Peak Output Current	IPK	Tj=25°C			1.8	A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		250		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

Note 1: The Maximum steady state usable output current are dependent on input voltage, heat sinking, lead length of the package and copper pattern of PCB. The data above represents pulse test conditions with junction temperatures specified at the initiation of test.

Note 2: Power dissipation<0.5W

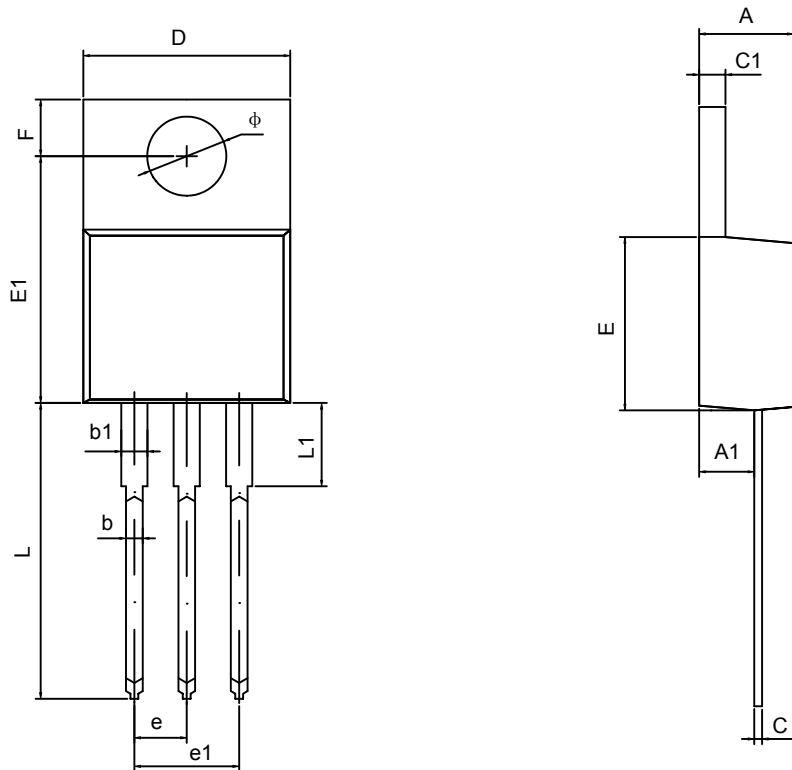TO-220-3L PACKAGE OUTLINE DIMENSIONS


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.710	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540TYP		0.100TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
φ	3.790	3.890	0.149	0.153