


Adjustable Carbon Attenuators

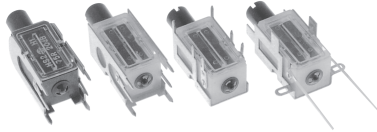

FEATURES

- Model M2001H is for matching the characteristic impedance of coaxial antenna cables and is suitable for antenna amplifiers of up to 900MHz.

MECHANICAL SPECIFICATIONS

Casing: Plastic material, dust protected.
Shielded Basket/Pins: Electroplated SN, 5 μ .
Mounting: Fish-plates.
Adjustment: Insulated plastic shaft with screwdriver slot and .079 inch [2mm] hexagon.
Terminals: Silver plated lugs, tinned pins.
Nominal angle of rotation: 3 (+ 3.0 - 0.5) revolutions. 6 revolutions on request.
Operating torque: .56 to 1.96 oz. in.
End stop torque: 4.97 oz. in. (7 Ncm). Fixed stop at 3 revolutions. 6 revolutions, clutch mechanism, no end stop.
Weight: .13 to .14 oz.

MATERIAL SPECIFICATIONS


Cover: Makrolon 94V2.
Shaft: Durethan 94V0.
Case: Hostaform 94HB.

STANDARD ELECTRICAL SPECIFICATIONS	
Resistive Element	Carbon on laminated paper
Wiper Contact	Metal
Impedance	75 ohms, 50 ohms (60 ohms on request)
Power Rating	.25 watt
Nominal Attenuation and Tolerance	20dB (+ 5 - 2dB), 10dB (+ 2 - 2dB), 6dB on request
Adjustable Minimum Attenuation	\leq 0.5dB
Variation in Attenuation Due to Frequency	
up to 300MHz	\leq 0.25dB
over 300 to 900MHZ	\leq 1dB
Reflexion Attenuation	.5 to 20dB attenuation
up to 300MHz	\geq 20dB
up to 900MHz	\geq 15dB
Temperature Limits	- 25°C to + 70°C


NOTE: Typical curves for transmission and return loss available.

DIMENSIONAL CONFIGURATIONS [in millimeters]


M2001HP1

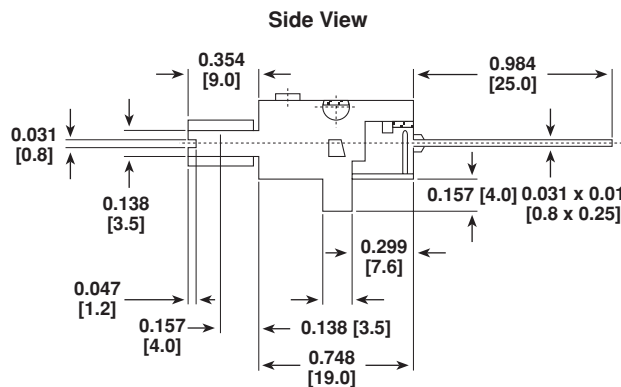


End View (All Versions)



Top View


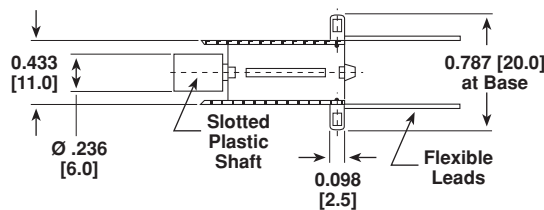


Electrical Circuit




DIMENSIONAL CONFIGURATIONS [in millimeters]



M2001HP2

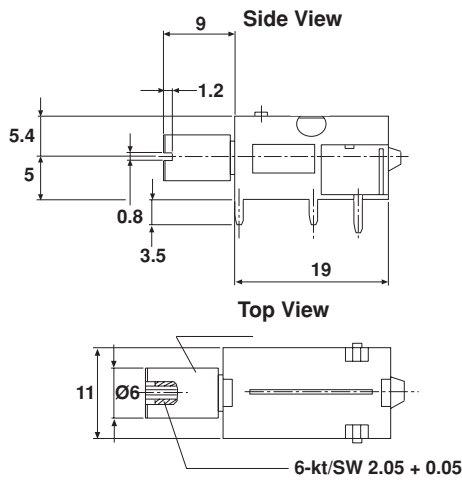


Electrical Circuit





M2001HS2

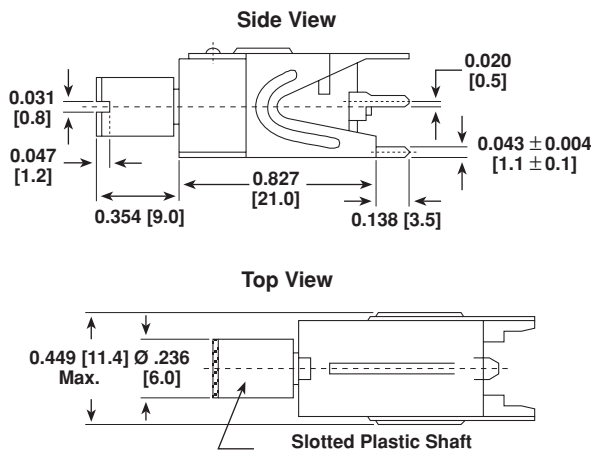


Electrical Circuit



M2001HP3

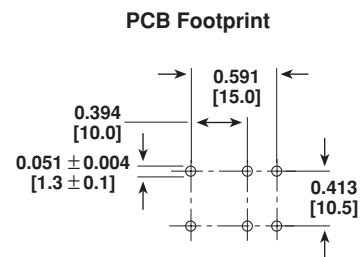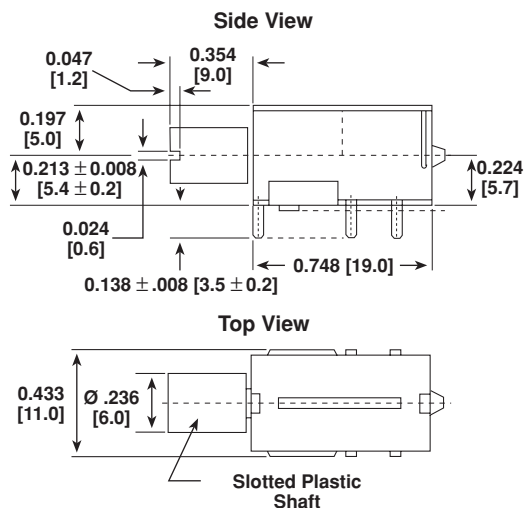

Electrical Circuit





PACKAGING

M2001HP1, M2001HS2: 250 pieces in bulk.
M2001HP2, M2001HP3: 100 pieces in plastic insert.

HOW TO ORDER

