



Typical Performance @ +25° C


Low Pass Filter Insertion Loss

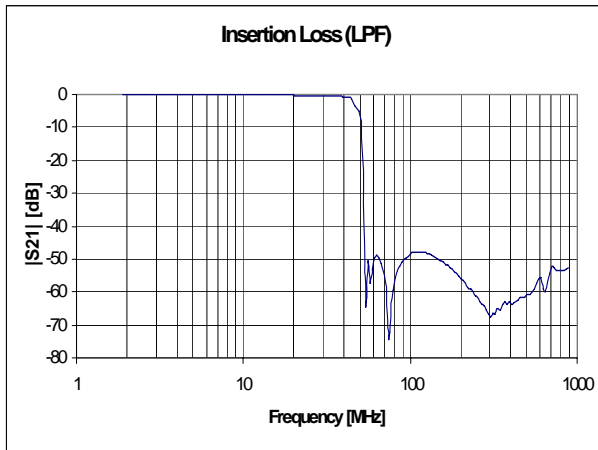


High Pass Filter Insertion Loss

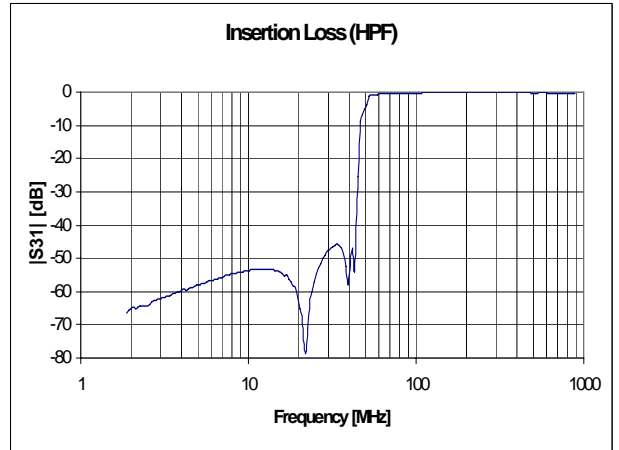

Input Return Loss

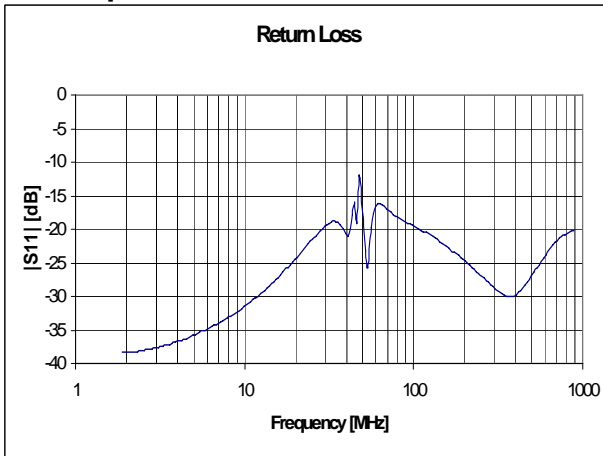

Isolation

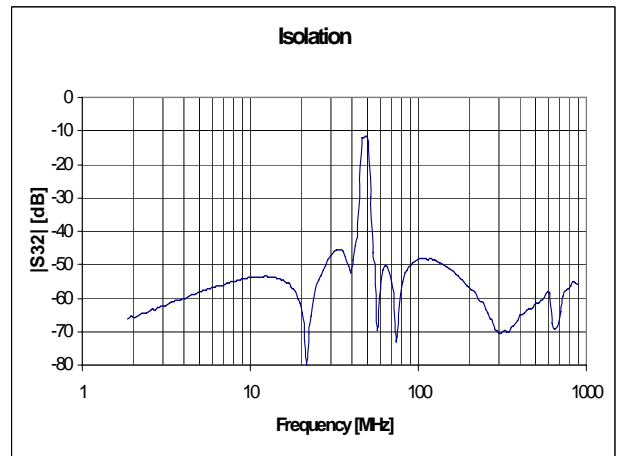

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temperature	-40° C to +85° C

Functional Configuration

Function	Pin No.
Input	1
High Pass Output	6
Low Pass Output	14
Ground	2-5, 7-13, 15-18
Not Connected	-

Rev -

Specifications subject to change without notice.

- North America: Tel. (800) 366-2266, Fax (800) 618-8883
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.

