

Monolithic crystal filter

MQF131.375-1500/06



Application

- 6 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

Limiting values

		Unit	Value
Center frequency	f_0	MHz	131.375
Insertion loss		dB	≤ 6.5
Pass band at 3.0 dB		kHz	± 7.50
Ripple in pass band	$f_0 \pm 5.00$ kHz	dB	≤ 1.0
Stop band attenuation	$f_0 \pm 35$ kHz	dB	≥ 50
Alternate attenuation		dB	> 55
Spurious responses		dB	> 40


Terminating impedance Z

R1 C1	Ohm/pF	50 0
R2 C2	Ohm/pF	50 0


Operating temp. range	$^{\circ}\text{C}$	-20... +70
-----------------------	--------------------	------------

Characteristics MQF131.375-1500/06

Pass band

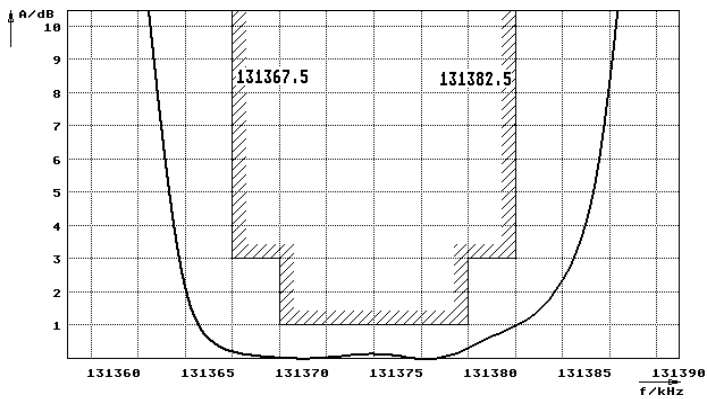

Stop band

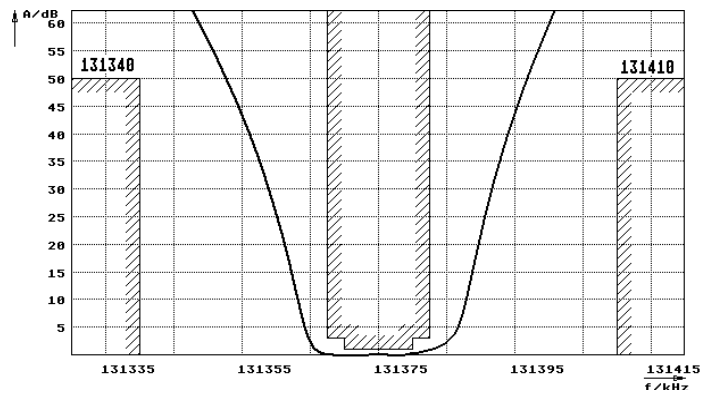

Pin connections: 1 Input
2 Input-E
3 Output
4 Output-E

