

RF Power Field Effect Transistors

N-Channel Enhancement-Mode Lateral MOSFETs

Designed for broadband commercial and industrial applications with frequencies up to 1000 MHz. The high gain and broadband performance of these devices make them ideal for large-signal, common-source amplifier applications in 28 volt base station equipment.

- Typical Single-Carrier N-CDMA Performance @ 880 MHz, $V_{DD} = 28$ Volts, $I_{DQ} = 350$ mA, $P_{out} = 10$ Watts Avg., IS-95 CDMA (Pilot, Sync, Paging, Traffic Codes 8 Through 13) Channel Bandwidth = 1.2288 MHz. PAR = 9.8 dB @ 0.01% Probability on CCDF.
Power Gain — 22.7 dB
Drain Efficiency — 32%
ACPR @ 750 kHz Offset — -47 dBc in 30 kHz Bandwidth

GSM EDGE Application

- Typical GSM EDGE Performance: $V_{DD} = 28$ Volts, $I_{DQ} = 350$ mA, $P_{out} = 16$ Watts Avg., Full Frequency Band (921-960 MHz)
Power Gain — 20 dB
Drain Efficiency — 46%
Spectral Regrowth @ 400 kHz Offset = -62 dBc
Spectral Regrowth @ 600 kHz Offset = -78 dBc
EVM — 1.5% rms

GSM Application


- Typical GSM Performance: $V_{DD} = 28$ Volts, $I_{DQ} = 350$ mA, $P_{out} = 45$ Watts, Full Frequency Band (921-960 MHz)
Power Gain — 20 dB
Drain Efficiency — 68%
- Capable of Handling 5:1 VSWR, @ 28 Vdc, 880 MHz, 45 Watts CW Output Power

Features


- Characterized with Series Equivalent Large-Signal Impedance Parameters
- Integrated ESD Protection
- 200°C Capable Plastic Package
- N Suffix Indicates Lead-Free Terminations. RoHS Compliant.
- TO-270-2 in Tape and Reel. R1 Suffix = 500 Units per 24 mm, 13 inch Reel.
- TO-272-2 in Tape and Reel. R1 Suffix = 500 Units per 44 mm, 13 inch Reel.

MRF6S9045NR1
MRF6S9045NBR1

880 MHz, 10 W AVG., 28 V
SINGLE N-CDMA
LATERAL N-CHANNEL
BROADBAND RF POWER MOSFETs



CASE 1265-08, STYLE 1
TO-270-2
PLASTIC
MRF6S9045NR1



CASE 1337-03, STYLE 1
TO-272-2
PLASTIC
MRF6S9045NBR1

Table 1. Maximum Ratings

| Rating | Symbol | Value | Unit |
|--|-----------|--------------|-----------|
| Drain-Source Voltage | V_{DSS} | - 0.5, +68 | Vdc |
| Gate-Source Voltage | V_{GS} | - 0.5, +12 | Vdc |
| Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C | P_D | 175 1.0 | W W/°C |
| Storage Temperature Range | T_{stg} | - 65 to +150 | °C |
| Operating Junction Temperature | T_J | 200 | °C |

Table 2. Thermal Characteristics

| Characteristic | Symbol | Value (1,2) | Unit |
|--|-----------------|-------------|------|
| Thermal Resistance, Junction to Case Case Temperature 81°C, 45 W CW Case Temperature 79°C, 10 W CW | $R_{\theta JC}$ | 1.0 1.1 | °C/W |

Table 3. ESD Protection Characteristics

| Test Methodology | Class |
|---------------------------------------|--------------|
| Human Body Model (per JESD22-A114) | 1A (Minimum) |
| Machine Model (per EIA/JESD22-A115) | A (Minimum) |
| Charge Device Model (per JESD22-C101) | IV (Minimum) |

Table 4. Moisture Sensitivity Level

| Test Methodology | Rating | Package Peak Temperature | Unit |
|---------------------------------------|--------|--------------------------|------|
| Per JESD 22-A113, IPC/JEDEC J-STD-020 | 3 | 260 | °C |

Table 5. Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

Off Characteristics

| | | | | | |
|---|-----------|---|---|----|-----------------|
| Zero Gate Voltage Drain Leakage Current ($V_{DS} = 68\text{ Vdc}$, $V_{GS} = 0\text{ Vdc}$) | I_{DSS} | — | — | 10 | μAdc |
| Zero Gate Voltage Drain Leakage Current ($V_{DS} = 28\text{ Vdc}$, $V_{GS} = 0\text{ Vdc}$) | I_{DSS} | — | — | 1 | μAdc |
| Gate-Source Leakage Current ($V_{GS} = 5\text{ Vdc}$, $V_{DS} = 0\text{ Vdc}$) | I_{GSS} | — | — | 1 | μAdc |

On Characteristics

| | | | | | |
|---|--------------|---|------|-----|-----|
| Gate Threshold Voltage ($V_{DS} = 10\text{ Vdc}$, $I_D = 200\ \mu\text{A}$) | $V_{GS(th)}$ | 1 | 2 | 3 | Vdc |
| Gate Quiescent Voltage ($V_{DS} = 28\text{ Vdc}$, $I_D = 350\text{ mAdc}$) | $V_{GS(Q)}$ | 2 | 2.9 | 4 | Vdc |
| Drain-Source On-Voltage ($V_{GS} = 10\text{ Vdc}$, $I_D = 1.0\text{ Adc}$) | $V_{DS(on)}$ | — | 0.22 | 0.3 | Vdc |
| Forward Transconductance ($V_{DS} = 10\text{ Vdc}$, $I_D = 3\text{ Adc}$) | g_{fs} | — | 4 | — | S |

Dynamic Characteristics

| | | | | | |
|---|-----------|---|------|---|----|
| Input Capacitance ($V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$) | C_{iss} | — | 77 | — | pF |
| Output Capacitance ($V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$) | C_{oss} | — | 27 | — | pF |
| Reverse Transfer Capacitance ($V_{DS} = 28\text{ Vdc} \pm 30\text{ mV(rms)ac}$ @ 1 MHz, $V_{GS} = 0\text{ Vdc}$) | C_{rss} | — | 0.78 | — | pF |

Functional Tests (In Freescale Test Fixture, 50 ohm system) $V_{DD} = 28\text{ Vdc}$, $I_{DQ} = 350\text{ mA}$, $P_{out} = 10\text{ W Avg.}$, $f = 880\text{ MHz}$, Single-Carrier N-CDMA, 1.2288 MHz Channel Bandwidth Carrier. ACPR measured in 30 kHz Channel Bandwidth @ $\pm 750\text{ kHz}$ Offset. PAR = 9.8 dB @ 0.01% Probability on CCDF

| | | | | | |
|------------------------------|---------------|------|------------|----------|-----|
| Power Gain | G_{ps} | 21 | 22.7 | 25 | dB |
| Drain Efficiency | η_D | 30.5 | 32 | — | % |
| Adjacent Channel Power Ratio | ACPR | — | -47 | -45 | dBc |
| Input Return Loss | IRL | — | -20 -20 | -9 -7 | dB |
| | MRF6S9045NR1 | | | | |
| | MRF6S9045NBR1 | | | | |

1. MTTF calculator available at <http://www.freescale.com/rf>. Select Tools/Software/Application Software/Calculators to access the MTTF calculators by product.


2. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.freescale.com/rf>. Select Documentation/Application Notes - AN1955.

Table 5. Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted) (continued)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|----------|-----|-----|-----|------|
| Typical GSM EDGE Performances (In Freescale GSM EDGE Test Fixture Optimized for 921 -960 MHz, 50 ohm system) $V_{DD} = 28\text{ Vdc}$, $I_{DQ} = 350\text{ mA}$, $P_{out} = 16\text{ W Avg.}$, $f = 921\text{ -}960\text{ MHz}$, GSM EDGE Signal | | | | | |
| Power Gain | G_{ps} | — | 20 | — | dB |
| Drain Efficiency | η_D | — | 46 | — | % |
| Error Vector Magnitude | EVM | — | 1.5 | — | % |
| Spectral Regrowth at 400 kHz Offset | SR1 | — | -62 | — | dBc |
| Spectral Regrowth at 600 kHz Offset | SR2 | — | -78 | — | dBc |

Typical CW Performances (In Freescale GSM Test Fixture Optimized for 921 -960 MHz, 50 ohm system) $V_{DD} = 28\text{ Vdc}$,
 $I_{DQ} = 350\text{ mA}$, $P_{out} = 45\text{ W}$, $f = 921\text{ -}960\text{ MHz}$

| | | | | | |
|--|----------|---|-----|---|----|
| Power Gain | G_{ps} | — | 20 | — | dB |
| Drain Efficiency | η_D | — | 68 | — | % |
| Input Return Loss | IRL | — | -12 | — | dB |
| P_{out} @ 1 dB Compression Point ($f = 940\text{ MHz}$) | P1dB | — | 52 | — | W |

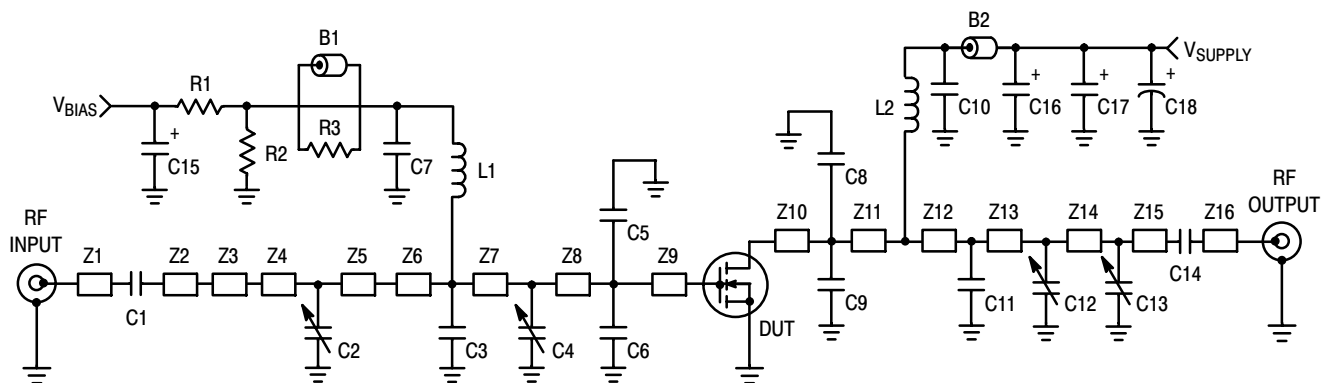

| | | | |
|----|--------------------------------|-----|--|
| Z1 | 0.215" x 0.065" Microstrip | Z10 | 0.360" x 0.270" Microstrip |
| Z2 | 0.221" x 0.065" Microstrip | Z11 | 0.063" x 0.270" Microstrip |
| Z3 | 0.500" x 0.100" Microstrip | Z12 | 0.360" x 0.065" Microstrip |
| Z4 | 0.460" x 0.270" Microstrip | Z13 | 0.095" x 0.065" Microstrip |
| Z5 | 0.040" x 0.270" Microstrip | Z14 | 0.800" x 0.065" Microstrip |
| Z6 | 0.280" x 0.270" x 0.530" Taper | Z15 | 0.260" x 0.065" Microstrip |
| Z7 | 0.087" x 0.525" Microstrip | Z16 | 0.325" x 0.065" Microstrip |
| Z8 | 0.435" x 0.525" Microstrip | PCB | Taconic RF-35 0.030", $\epsilon_r = 3.5$ |
| Z9 | 0.057" x 0.525" Microstrip | | |

Figure 1. MRF6S9045NR1(NBR1) Test Circuit Schematic

Table 6. MRF6S9045NR1(NBR1) Test Circuit Component Designations and Values

| Part | Description | Part Number | Manufacturer |
|------------------|--|-----------------|--------------|
| B1 | Ferrite Bead | 2743019447 | Fair Rite |
| B2 | Ferrite Bead | 2743021447 | Fair Rite |
| C1, C7, C10, C14 | 47 pF Chip Capacitors | 100B470JP500X | ATC |
| C2, C4, C12 | 0.8 - 8.0 pF Variable Capacitors, Gigatrim | 27291SL | Johanson |
| C3 | 15 pF Chip Capacitor | 100B150JP500X | ATC |
| C5, C6 | 12 pF Chip Capacitors | 100B120JP500X | ATC |
| C8, C9 | 13 pF Chip Capacitors | 100B130JP500X | ATC |
| C11 | 7.5 pF Chip Capacitor | 100B7R5JP500X | ATC |
| C13 | 0.6 - 4.5 pF Variable Capacitor, Gigatrim | 27271SL | Johanson |
| C15, C16, C17 | 10 μ F, 35 V Tantalum Capacitors | T491D106K035AS | Kemet |
| C18 | 220 μ F, 50 V Electrolytic Capacitor | 678D227M025CG3D | Vishay |
| L1, L2 | 12.5 nH Inductor | A04T-5 | Coilcraft |
| R1 | 1 k Ω Chip Resistor | | |
| R2 | 560 k Ω Chip Resistor | | |
| R3 | 12 Ω Chip Resistor | | |

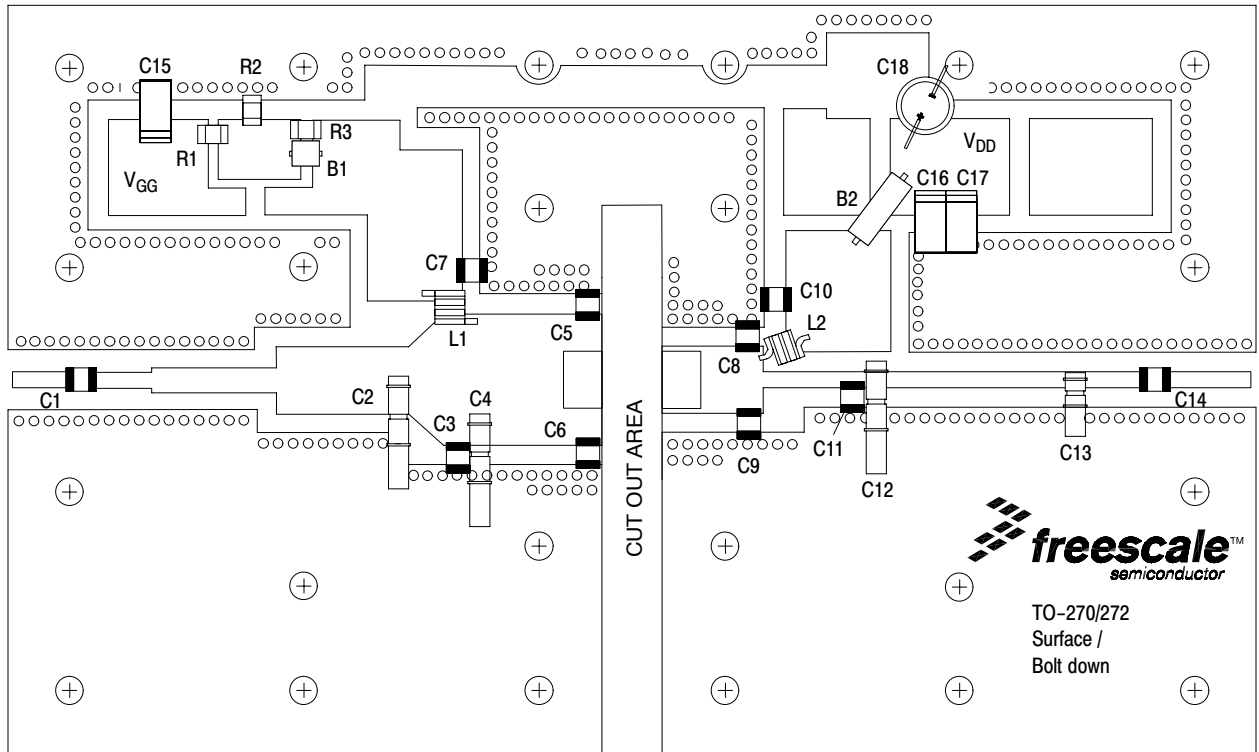


Figure 2. MRF6S9045NR1 (NBR1) Test Circuit Component Layout

TYPICAL CHARACTERISTICS

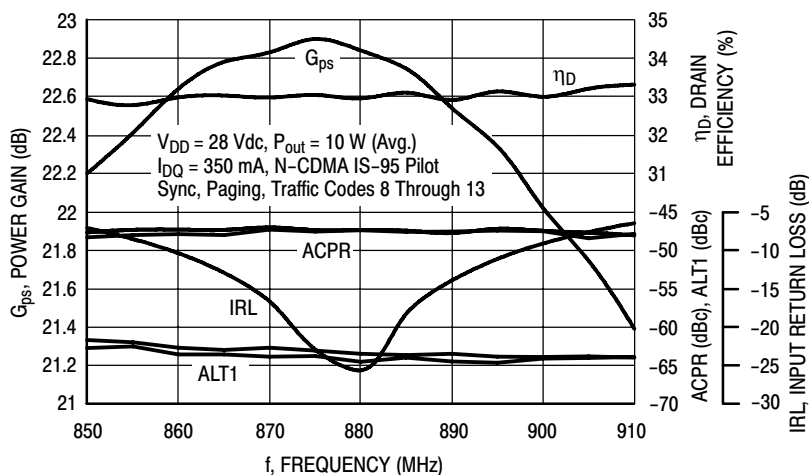


Figure 3. Single-Carrier N-CDMA Broadband Performance @ $P_{out} = 10$ Watts Avg.

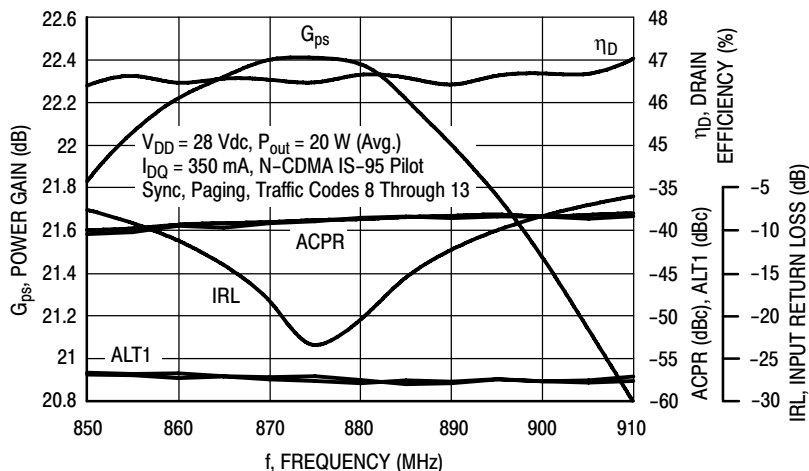


Figure 4. Single-Carrier N-CDMA Broadband Performance @ $P_{out} = 20$ Watts Avg.

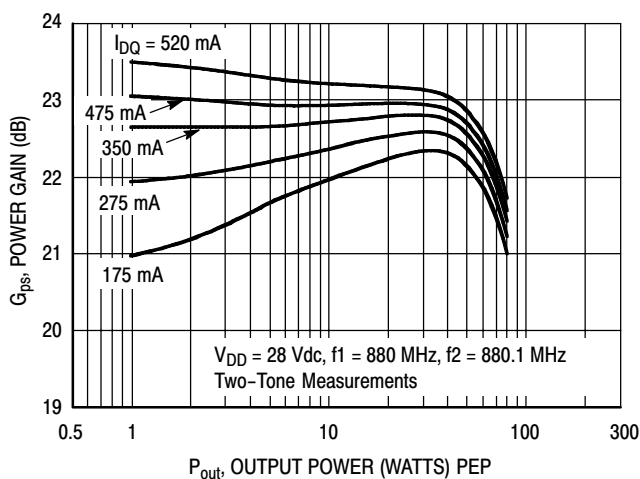


Figure 5. Two-Tone Power Gain versus Output Power

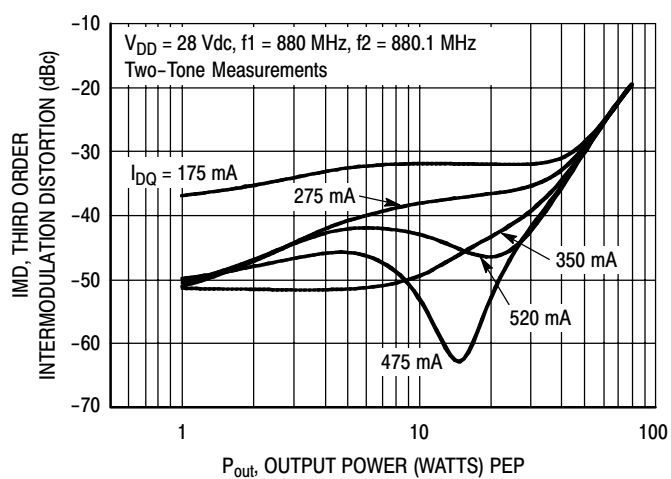


Figure 6. Third Order Intermodulation Distortion versus Output Power

TYPICAL CHARACTERISTICS

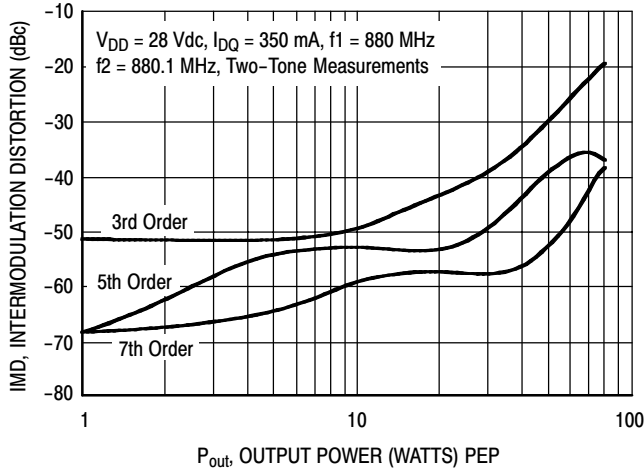


Figure 7. Intermodulation Distortion Products versus Output Power

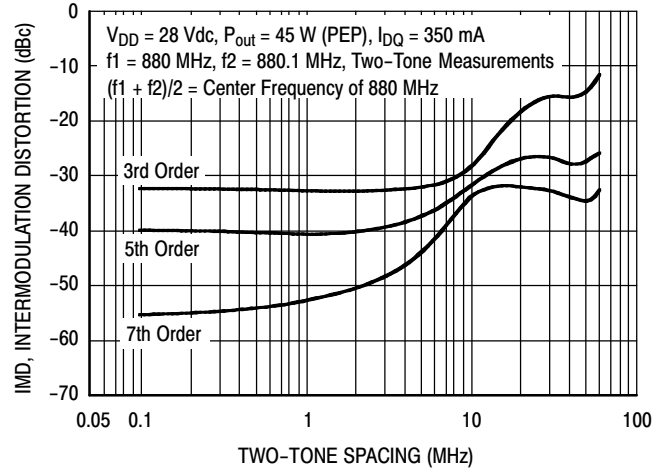


Figure 8. Intermodulation Distortion Products versus Tone Spacing

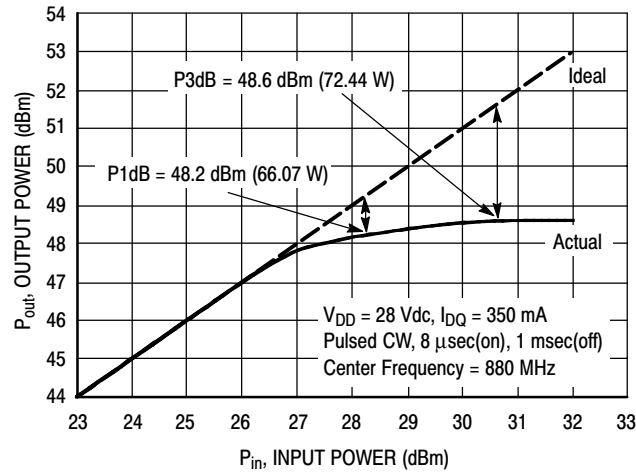


Figure 9. Pulse CW Output Power versus Input Power

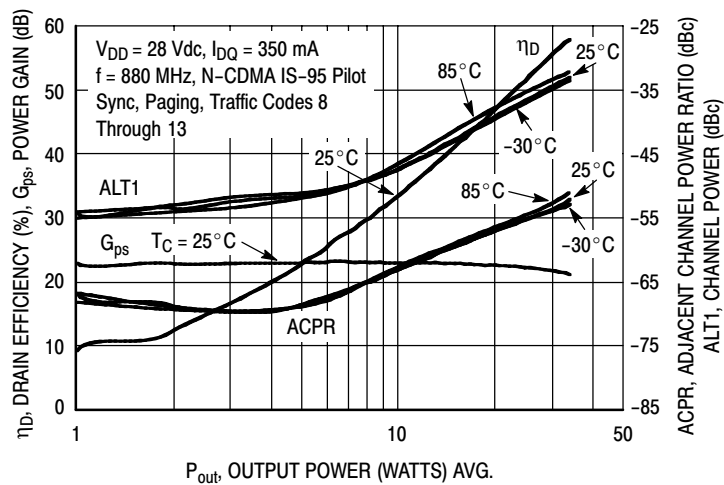


Figure 10. Single-Carrier N-CDMA ACPR, ALT1, Power Gain and Drain Efficiency versus Output Power

TYPICAL CHARACTERISTICS

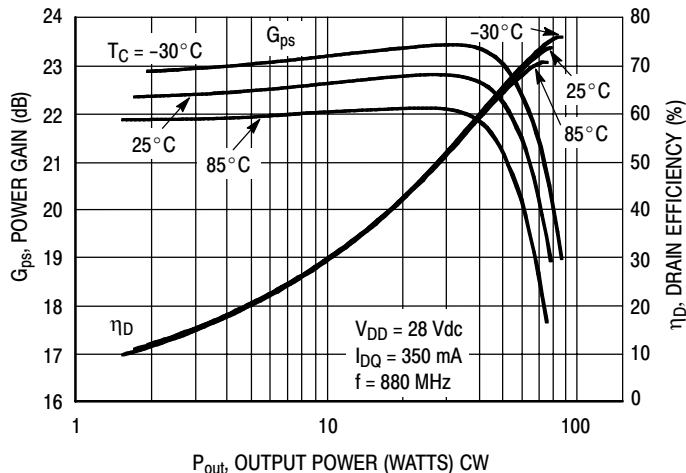


Figure 11. Power Gain and Drain Efficiency versus CW Output Power


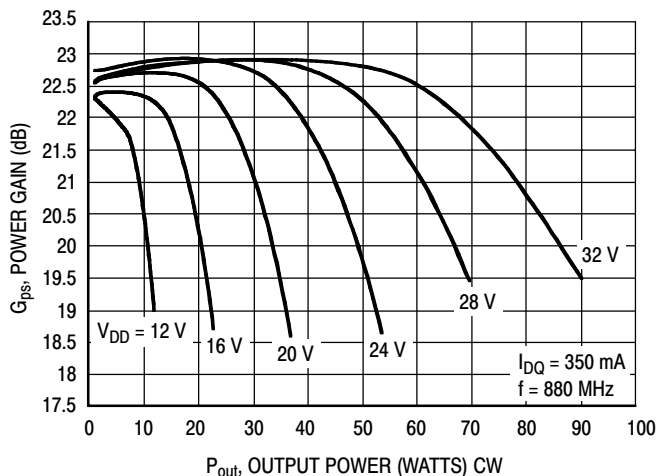


Figure 12. Power Gain versus Output Power

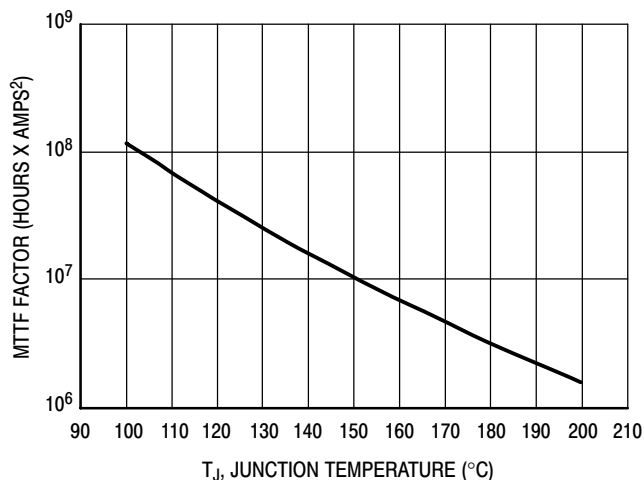

This above graph displays calculated MTTF in hours x ampere² drain current. Life tests at elevated temperatures have correlated to better than ±10% of the theoretical prediction for metal failure. Divide MTTF factor by I_D² for MTTF in a particular application.

Figure 13. MTTF Factor versus Junction Temperature

N-CDMA TEST SIGNAL

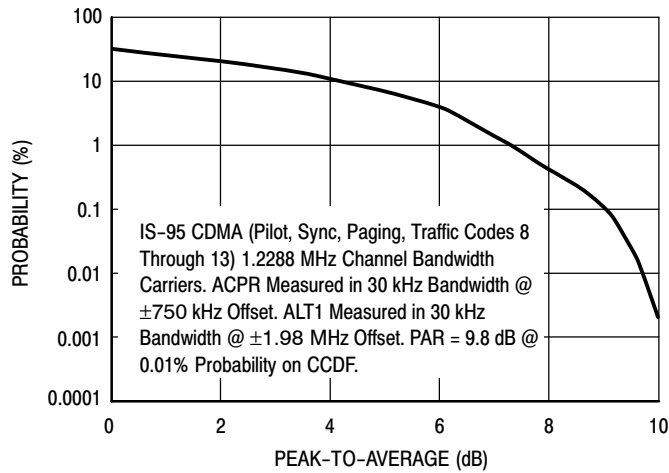


Figure 14. Single-Carrier CCDF N-CDMA


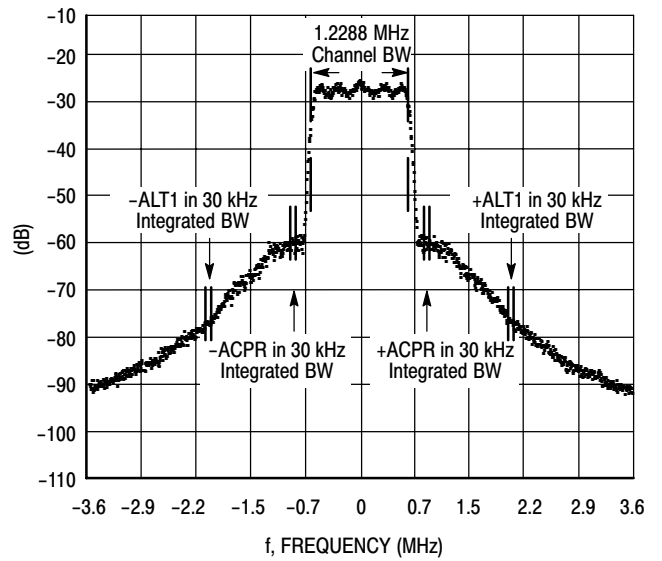


Figure 15. Single-Carrier N-CDMA Spectrum

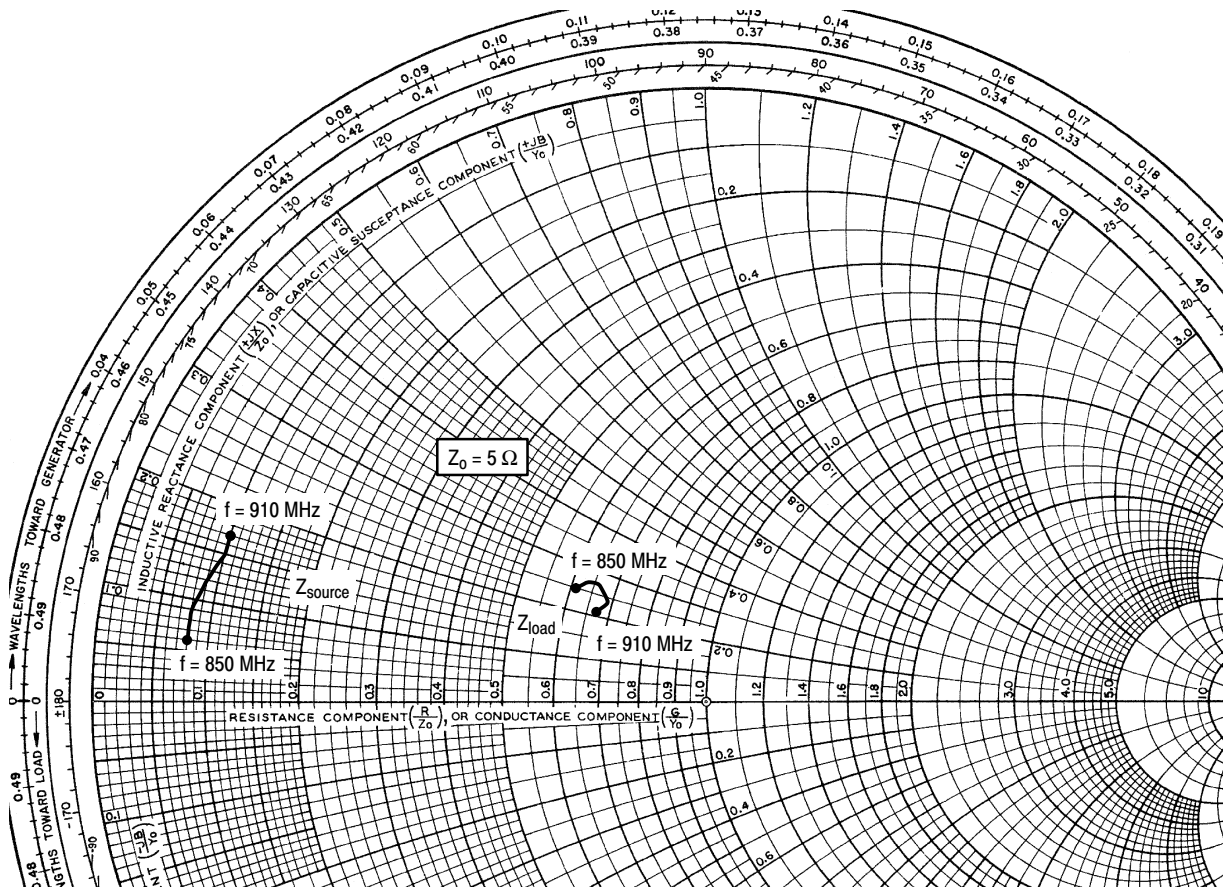

$V_{DD} = 28 \text{ Vdc}$, $I_{DQ} = 350 \text{ mA}$, $P_{out} = 10 \text{ W Avg.}$

| f MHz | Z_{source} Ω | Z_{load} Ω |
|----------|--------------------------|------------------------|
| 850 | $0.42 + j0.30$ | $3.05 + j1.27$ |
| 865 | $0.42 + j0.44$ | $3.16 + j1.33$ |
| 880 | $0.45 + j0.60$ | $3.31 + j1.33$ |
| 895 | $0.48 + j0.74$ | $3.43 + j1.20$ |
| 910 | $0.50 + j0.85$ | $3.35 + j1.05$ |

Z_{source} = Test circuit impedance as measured from gate to ground.

Z_{load} = Test circuit impedance as measured from drain to ground.



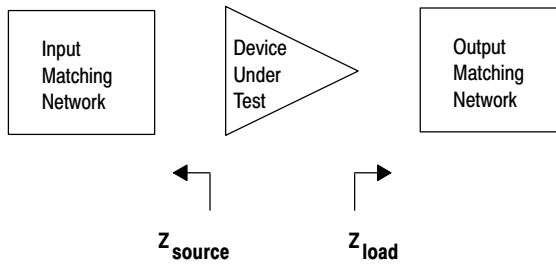


Figure 16. Series Equivalent Source and Load Impedance

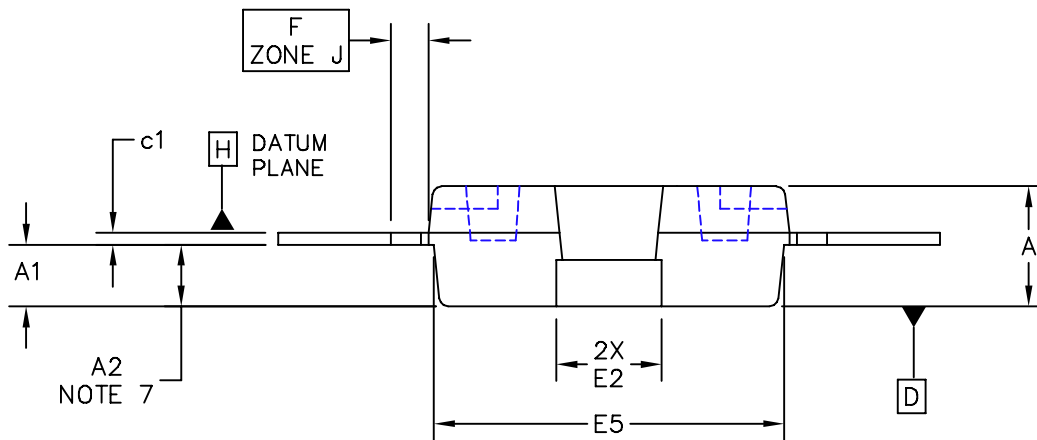


NOTES

PACKAGE DIMENSIONS

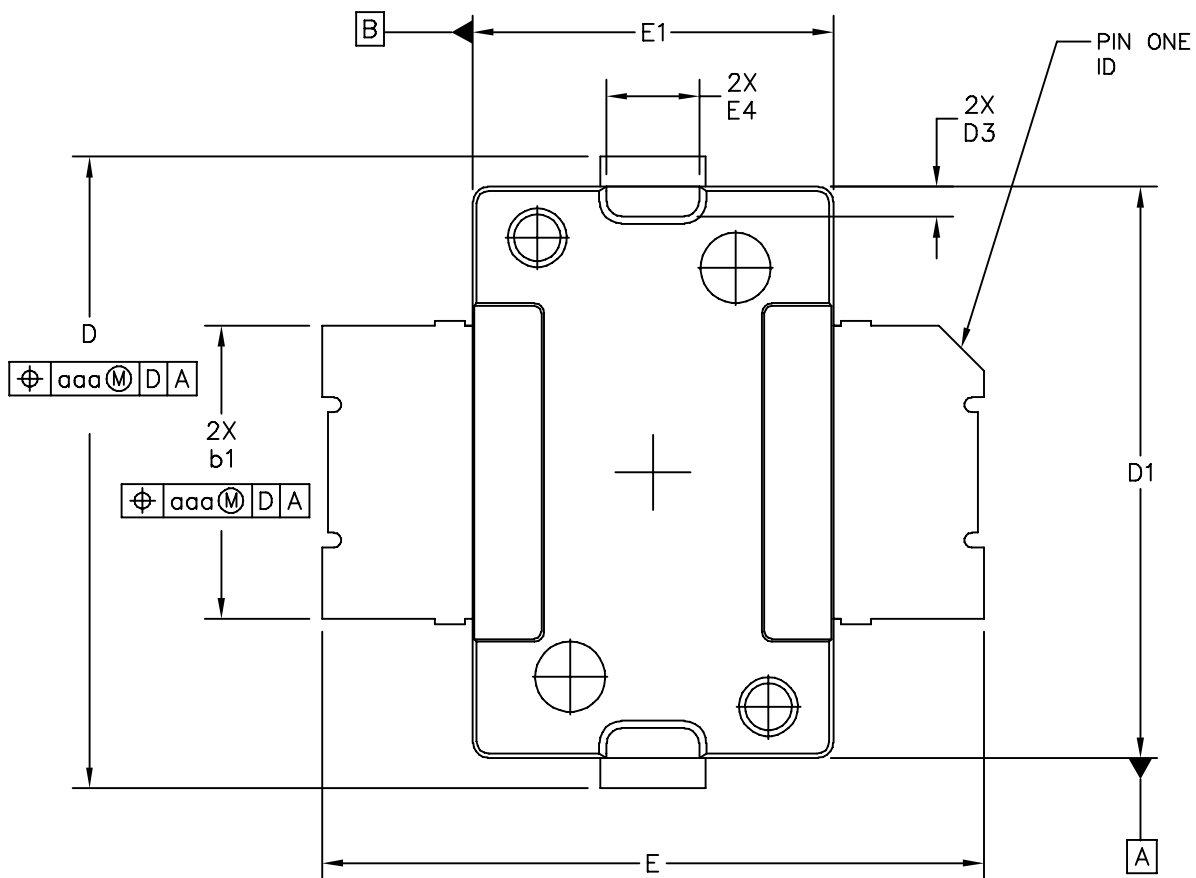

| | | |
|---|---------------------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED. | MECHANICAL OUTLINE | PRINT VERSION NOT TO SCALE |
| TITLE: TO-270 SURFACE MOUNT | DOCUMENT NO: 98ASH98117A | REV: J |
| | CASE NUMBER: 1265-08 | 01 APR 2005 |
| | STANDARD: NON-JEDEC | |

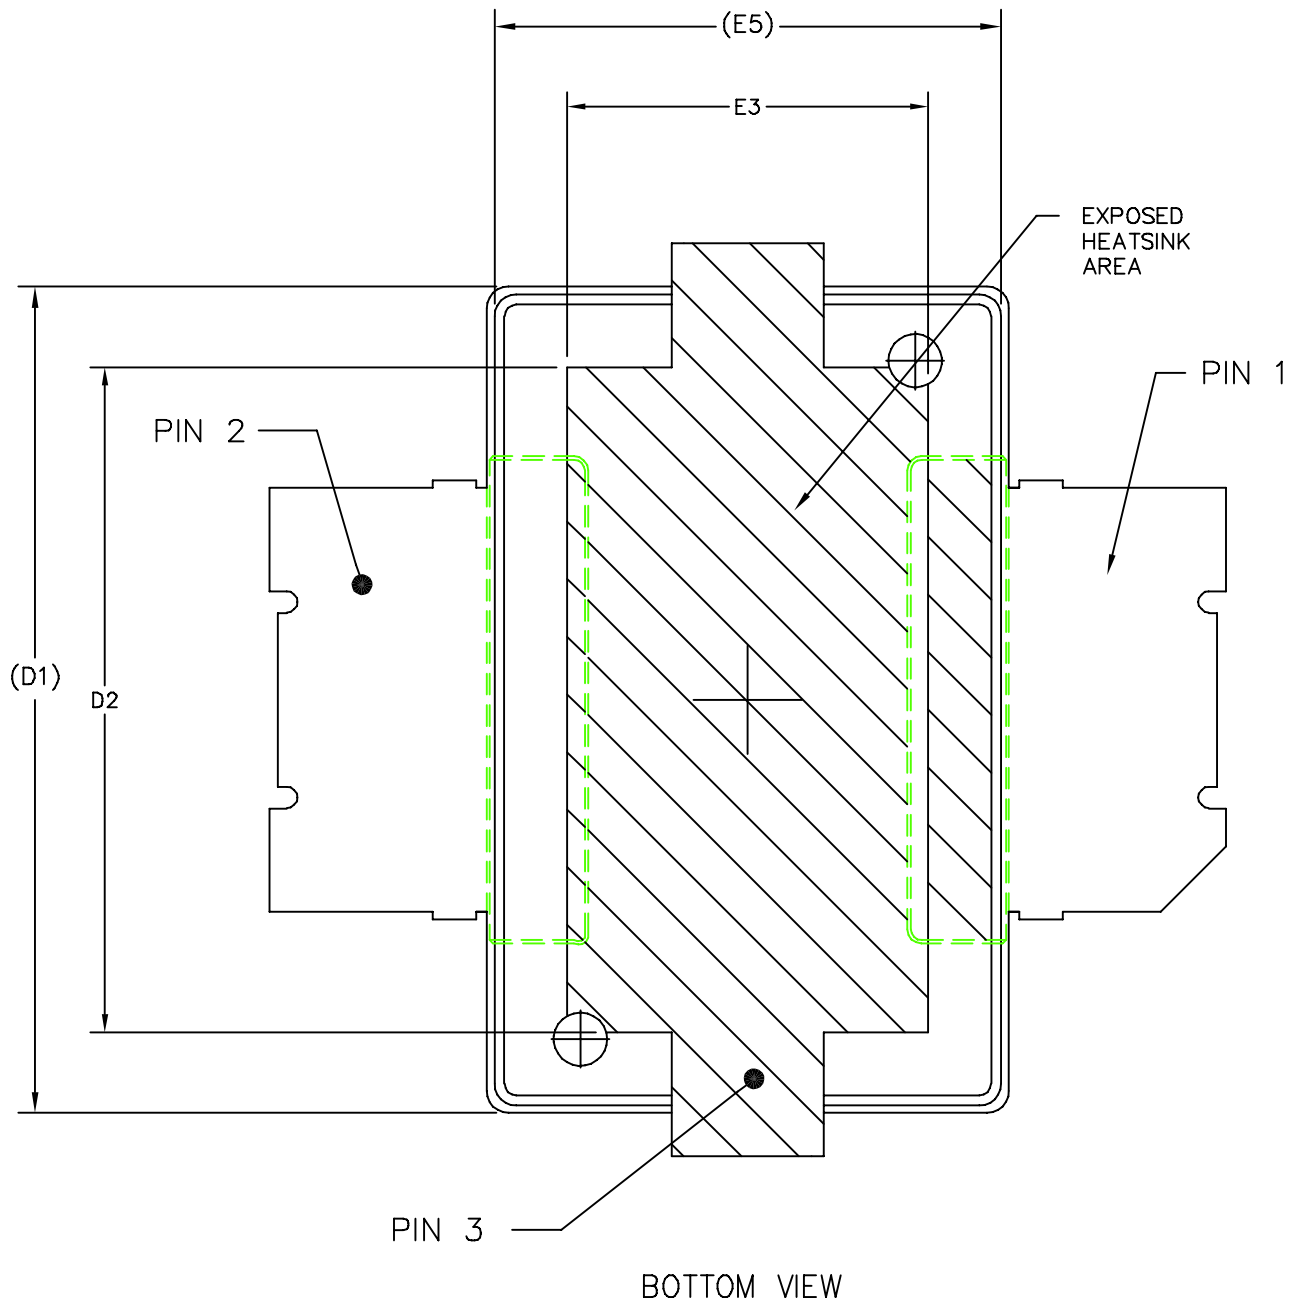

| | | | |
|---|---------------------------|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED. | MECHANICAL OUTLINE | PRINT VERSION NOT TO SCALE | |
| TITLE: TO-270 SURFACE MOUNT | DOCUMENT NO: 98ASH98117A | REV: J | |
| | CASE NUMBER: 1265-08 | 01 APR 2005 | |
| | STANDARD: NON-JEDEC | | |



MRF6S9045NR1 MRF6S9045NBR1

NOTES:


1. CONTROLLING DIMENSION: INCH
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
3. DATUM PLANE -H- IS LOCATED AT TOP OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE TOP OF THE PARTING LINE.
4. DIMENSIONS "D1" AND "E1" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS .006 PER SIDE. DIMENSIONS "D1 AND "E1" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
5. DIMENSION "b1" DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .005 TOTAL IN EXCESS OF THE "b1" DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. DATUMS -A- AND -B- TO BE DETERMINED AT DATUM PLANE -H-.
7. DIMENSION "A2" APPLIES WITHIN ZONE "J" ONLY.
8. DIMENSIONS "D" AND "E2" DO NOT INCLUDE MOLD PROTRUSION. OVERALL LENGTH INCLUDING MOLD PROTRUSION SHOULD NOT EXCEED 0.430 INCH FOR DIMENSION "D" AND 0.080 INCH FOR DIMENSION "E2". DIMENSIONS "D" AND "E2" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -D-.

STYLE 1:
 PIN 1 - DRAIN
 PIN 2 - GATE
 PIN 3 - SOURCE

| DIM | INCH | | MILLIMETER | | DIM | INCH | | MILLIMETER | |
|---|------|------|---------------------------|-------|--------------------------|----------------------------|------|-------------|------|
| | MIN | MAX | MIN | MAX | | MIN | MAX | MIN | MAX |
| A | .078 | .082 | 1.98 | 2.08 | F | .025 BSC | | 0.64 BSC | |
| A1 | .039 | .043 | 0.99 | 1.09 | b1 | .193 | .199 | 4.90 | 5.06 |
| A2 | .040 | .042 | 1.02 | 1.07 | c1 | .007 | .011 | 0.18 | 0.28 |
| D | .416 | .424 | 10.57 | 10.77 | aaa | .004 | | 0.10 | |
| D1 | .378 | .382 | 9.60 | 9.70 | | | | | |
| D2 | .290 | .320 | 7.37 | 8.13 | | | | | |
| D3 | .016 | .024 | 0.41 | 0.61 | | | | | |
| E | .436 | .444 | 11.07 | 11.28 | | | | | |
| E1 | .238 | .242 | 6.04 | 6.15 | | | | | |
| E2 | .066 | .074 | 1.68 | 1.88 | | | | | |
| E3 | .150 | .180 | 3.81 | 4.57 | | | | | |
| E4 | .058 | .066 | 1.47 | 1.68 | | | | | |
| E5 | .231 | .235 | 5.87 | 5.97 | | | | | |
| © FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED. | | | MECHANICAL OUTLINE | | | PRINT VERSION NOT TO SCALE | | | |
| TITLE: TO-270 SURFACE MOUNT | | | | | DOCUMENT NO: 98ASH98117A | | | REV: J | |
| | | | | | CASE NUMBER: 1265-08 | | | 01 APR 2005 | |
| | | | | | STANDARD: NON-JEDEC | | | | |

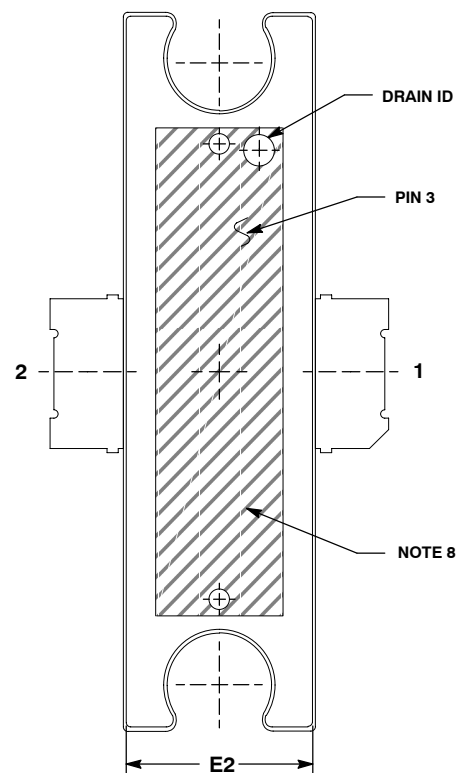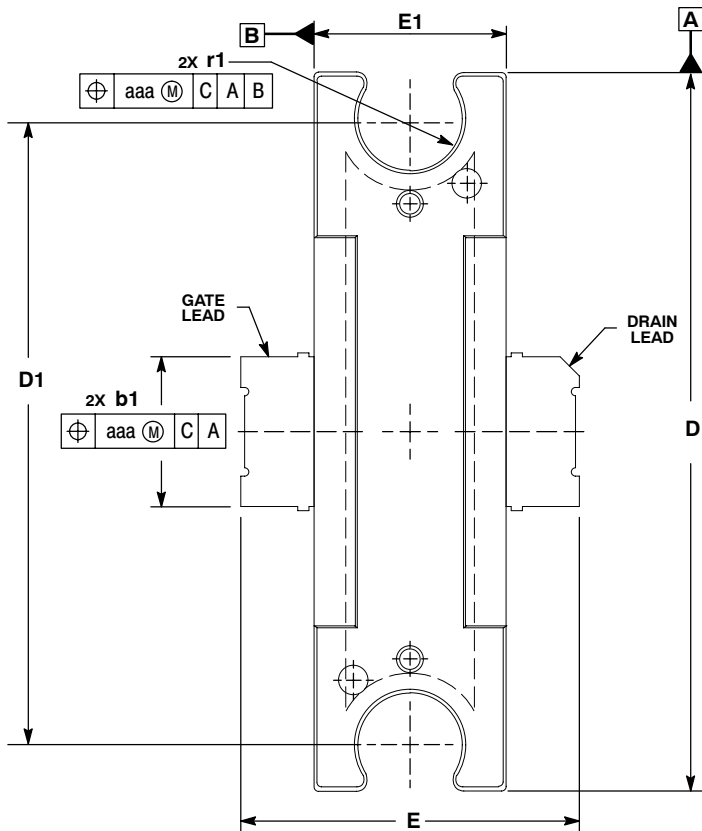

VIEW Y-Y

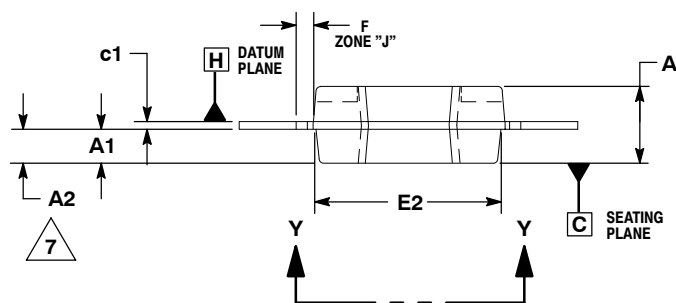

NOTES:

1. CONTROLLING DIMENSION: INCH.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.
3. DATUM PLANE -H- IS LOCATED AT THE TOP OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE TOP OF THE PARTING LINE.
4. DIMENSIONS "D" AND "E1" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS .006 PER SIDE. DIMENSIONS "D" AND "E1" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
5. DIMENSION "b1" DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .005 TOTAL IN EXCESS OF THE "b1" DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. DATUMS -A- AND -B- TO BE DETERMINED AT DATUM PLANE -H-.
7. DIMENSION A2 APPLIES WITHIN ZONE "J" ONLY.
8. CROSSHATCHING REPRESENTS THE EXPOSED AREA OF THE HEAT SLUG.

| DIM | INCHES | | MILLIMETERS | |
|-----|----------|------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | .100 | .104 | 2.54 | 2.64 |
| A1 | .039 | .043 | 0.99 | 1.09 |
| A2 | .040 | .042 | 1.02 | 1.07 |
| D | .928 | .932 | 23.57 | 23.67 |
| D1 | .810 BSC | | 20.57 BSC | |
| E | .438 | .442 | 11.12 | 11.23 |
| E1 | .248 | .252 | 6.30 | 6.40 |
| E2 | .241 | .245 | 6.12 | 6.22 |
| F | .025 BSC | | 0.64 BSC | |
| b1 | .193 | .199 | 4.90 | 5.05 |
| c1 | .007 | .011 | .18 | .28 |
| r1 | .063 | .068 | 1.60 | 1.73 |
| aaa | .004 | | .10 | |

STYLE 1:
 PIN 1. DRAIN
 2. GATE
 3. SOURCE

**CASE 1337-03
 ISSUE C
 TO-272-2
 PLASTIC
 MRF6S9045NBR1**

MRF6S9045NR1 MRF6S9045NBR1

How to Reach Us:

Home Page:

www.freescale.com

E-mail:

support@freescale.com

USA/Europe or Locations Not Listed:

Freescale Semiconductor
Technical Information Center, CH370
1300 N. Alma School Road
Chandler, Arizona 85224
+1-800-521-6274 or +1-480-768-2130
support@freescale.com

Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH
Technical Information Center
Schatzbogen 7
81829 Muenchen, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
support@freescale.com

Japan:

Freescale Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku,
Tokyo 153-0064
Japan
0120 191014 or +81 3 5437 9125
support.japan@freescale.com

Asia/Pacific:

Freescale Semiconductor Hong Kong Ltd.
Technical Information Center
2 Dai King Street
Tai Po Industrial Estate
Tai Po, N.T., Hong Kong
+800 2666 8080
support.asia@freescale.com

For Literature Requests Only:

Freescale Semiconductor Literature Distribution Center
P.O. Box 5405
Denver, Colorado 80217
1-800-441-2447 or 303-675-2140
Fax: 303-675-2150
LDCForFreescaleSemiconductor@hibbertgroup.com

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.
© Freescale Semiconductor, Inc. 2006. All rights reserved.

RoHS-compliant and/or Pb-free versions of Freescale products have the functionality and electrical characteristics of their non-RoHS-compliant and/or non-Pb-free counterparts. For further information, see <http://www.freescale.com> or contact your Freescale sales representative.

For information on Freescale's Environmental Products program, go to <http://www.freescale.com/epp>.

