

MSFB27-183-022K8


AMPS-IF

■Features

- IF filter for AMPS.
- Because it is leadless type, automatic mounting is possible.
- Excellent group delay distortion characteristics.

■Standard Frequencies


- 183.6MHz.

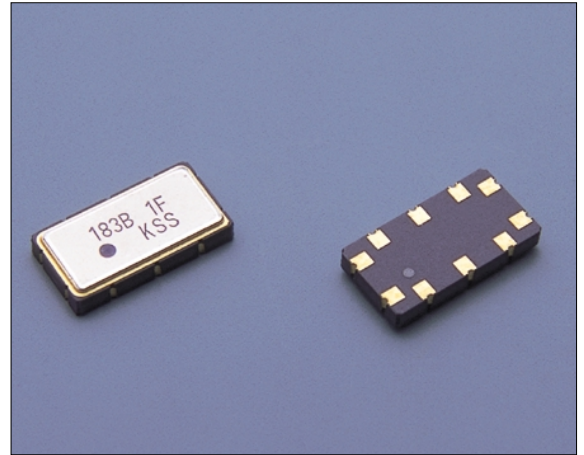

■Specifications

| Item | Unit | Conditions | Specifications |
|-----------------------------|------|--------------|----------------|
| Nominal Frequency | MHz | — | 183.6 |
| Operating Temperature Range | °C | -25~+75 | — |
| Storage Temperature Range | °C | -35~+85 | — |
| Pass Bandwidth | kHz | -3dB | Fo±11 MIN. |
| Ripple | dB | Fo±11kHz | 1.5 MAX. |
| Insertion Loss | dB | Minimum Loss | 5.5 MAX. |
| | | Fo±60kHz | 11 MIN. |
| Guaranteed Attenuation | dB | Fo±120kHz | 40 MIN. |
| | | Fo±11kHz | 15 MAX. |
| Terminating Impedance | Ω/pF | — | 410//—0.4 |

■Outline

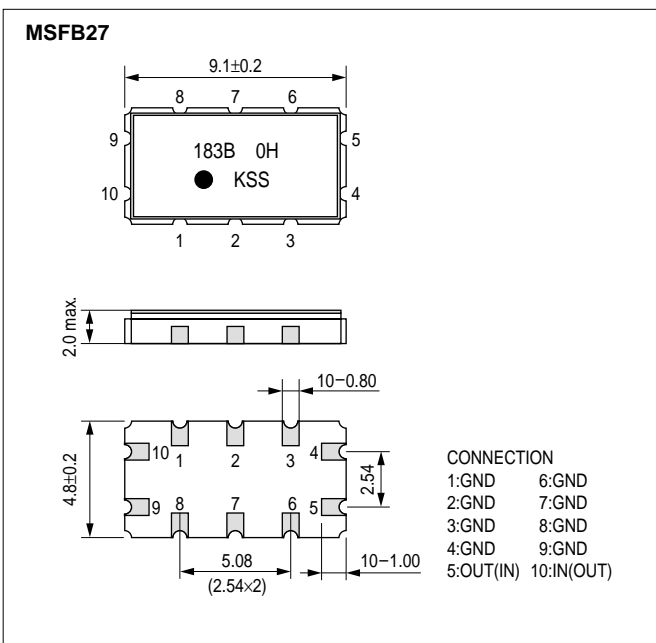

■Measurement Circuit

