



# LASER DIODE NX8341 Series

## 1 310 nm AlGaInAs MQW-DFB LASER DIODE FOR 10 Gb/s APPLICATION

### DESCRIPTION

The NX8341 Series is a 1 310 nm Multiple Quantum Well (MQW) structured Distributed Feed-Back (DFB) laser diode TOSA (transmitter optical subassembly) with InGaAs monitor PIN-PD in a receptacle type package designed for XENPAK/XPAK/X2/XFP transceiver.

### APPLICATIONS

- 10 G BASE-LW/LR
- 10 G Fiber Channel


### FEATURES


- Internal optical isolator
- Optical output power  $P_r = -2$  dBm
- Low threshold current  $I_{th} = 8$  mA TYP. @  $T_c = 25^\circ\text{C}$
- Wide operating temperature range  $T_c = -5$  to  $+85^\circ\text{C}$
- InGaAs monitor PIN-PD




The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.


<R> PACKAGE DIMENSIONS (UNIT : mm)

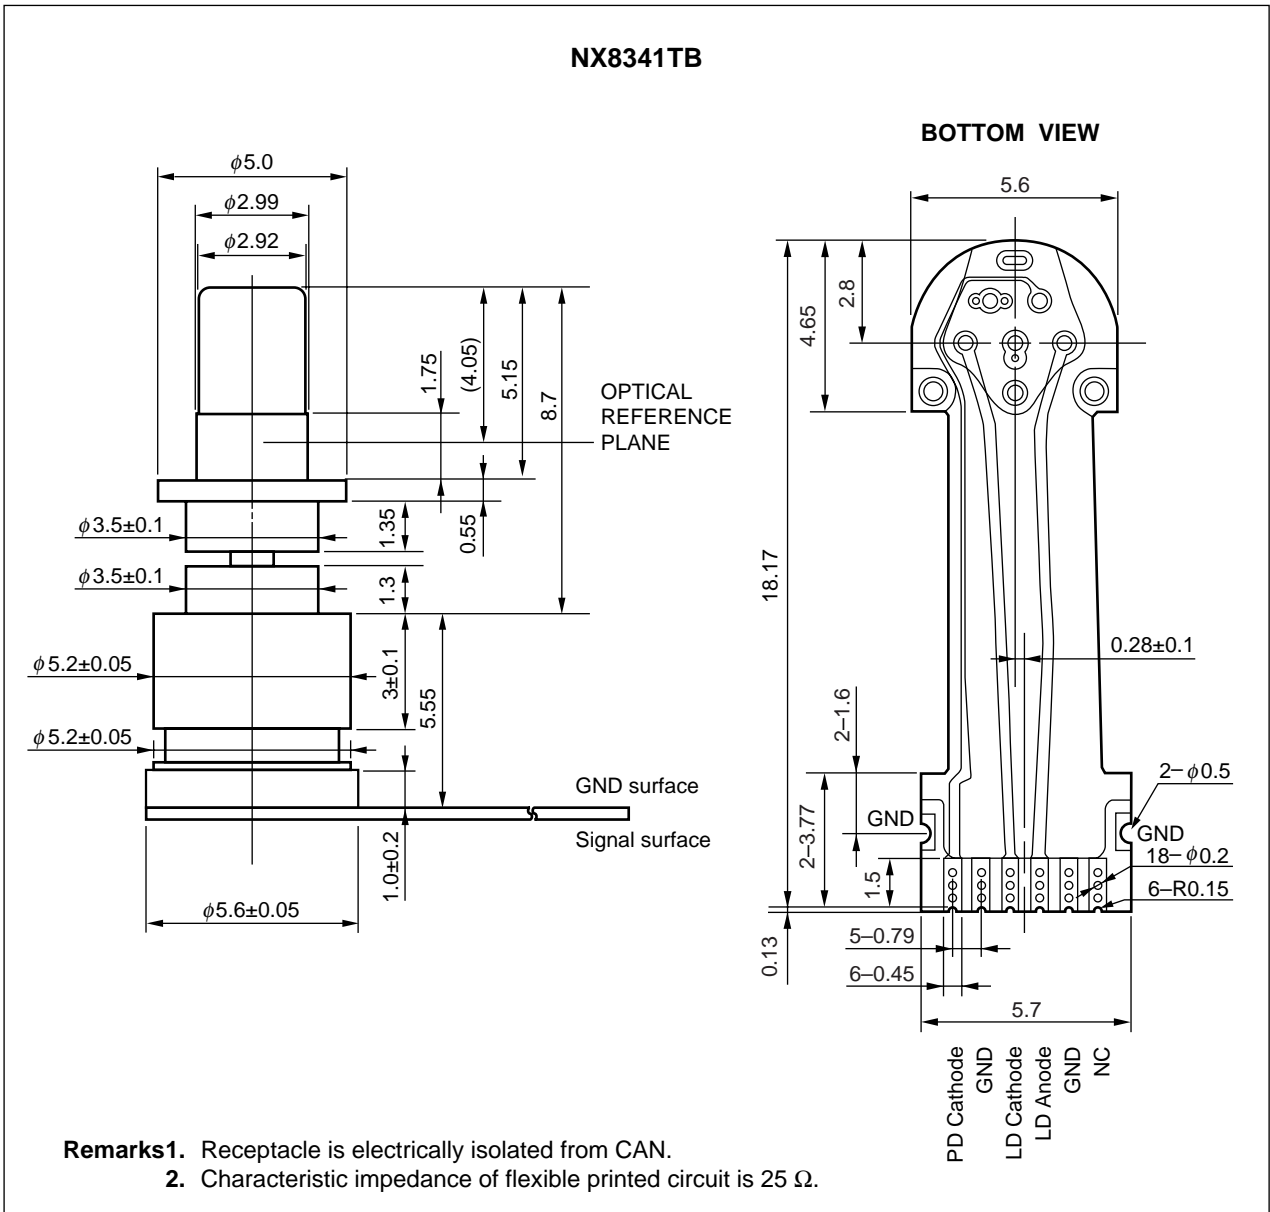

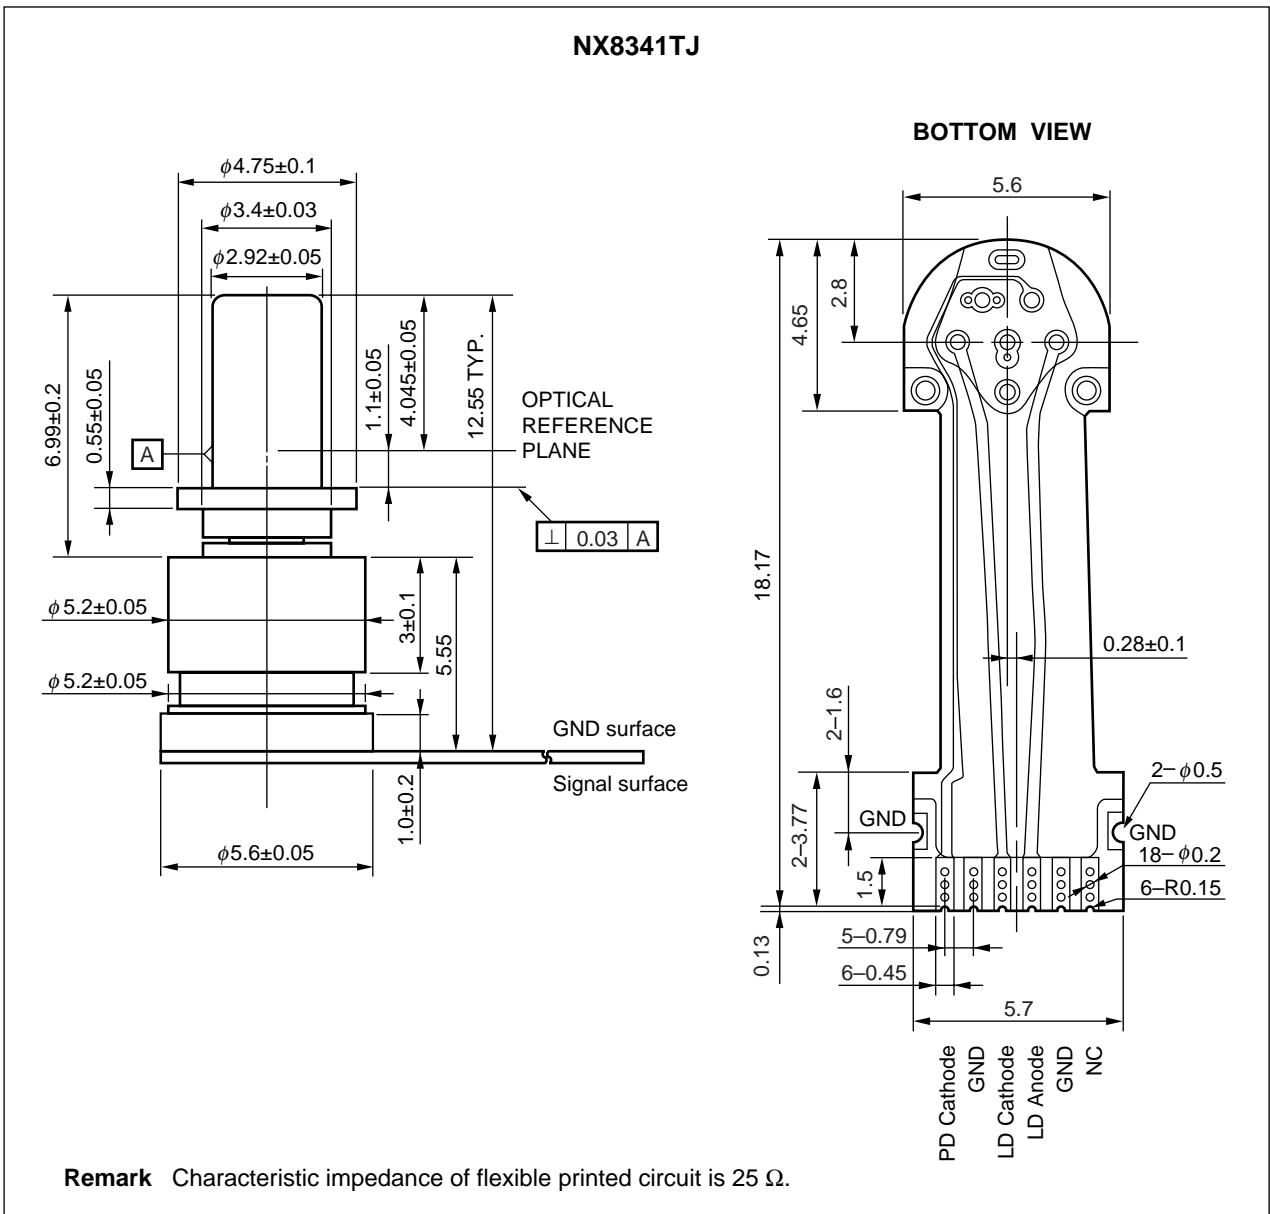


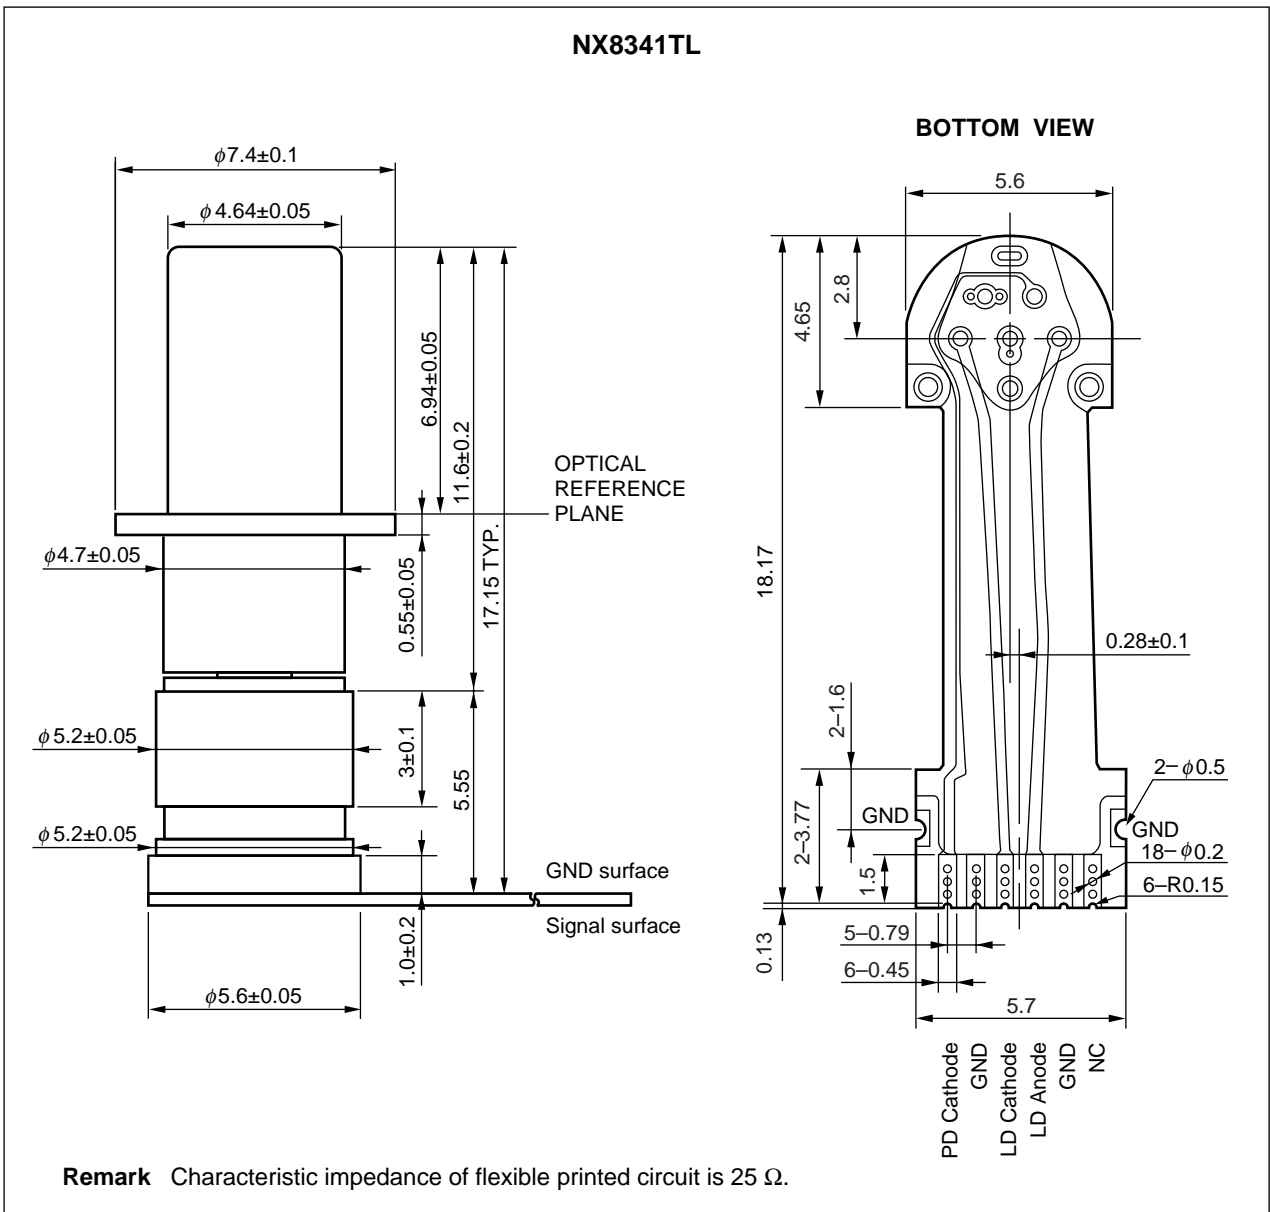


NX8341UB

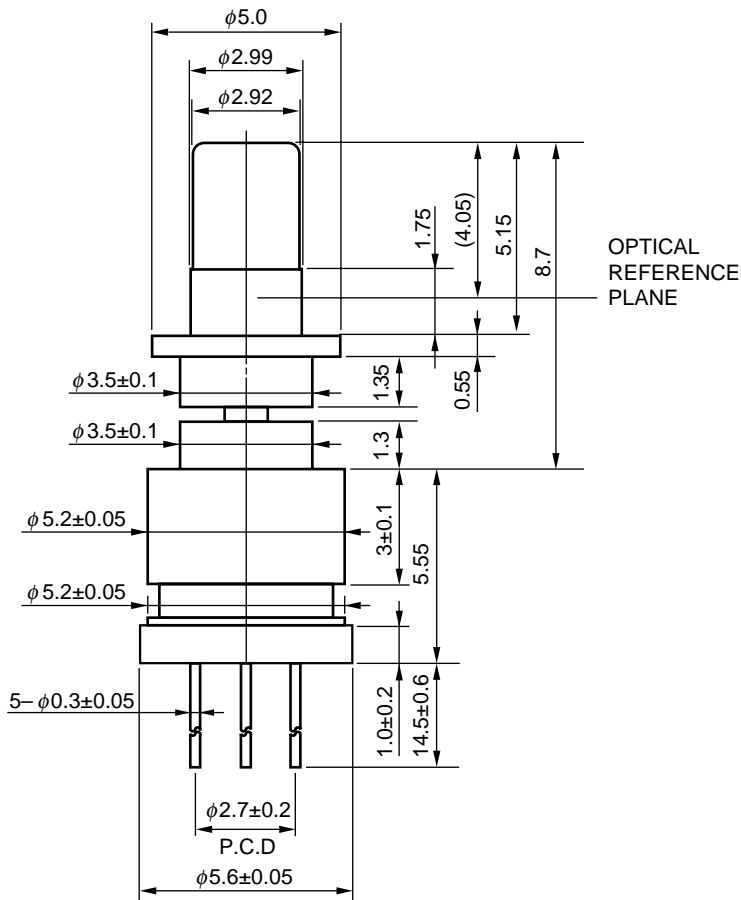


BOTTOM VIEW





PIN CONNECTIONS



**Remark** Receptacle is electrically isolated from CAN.

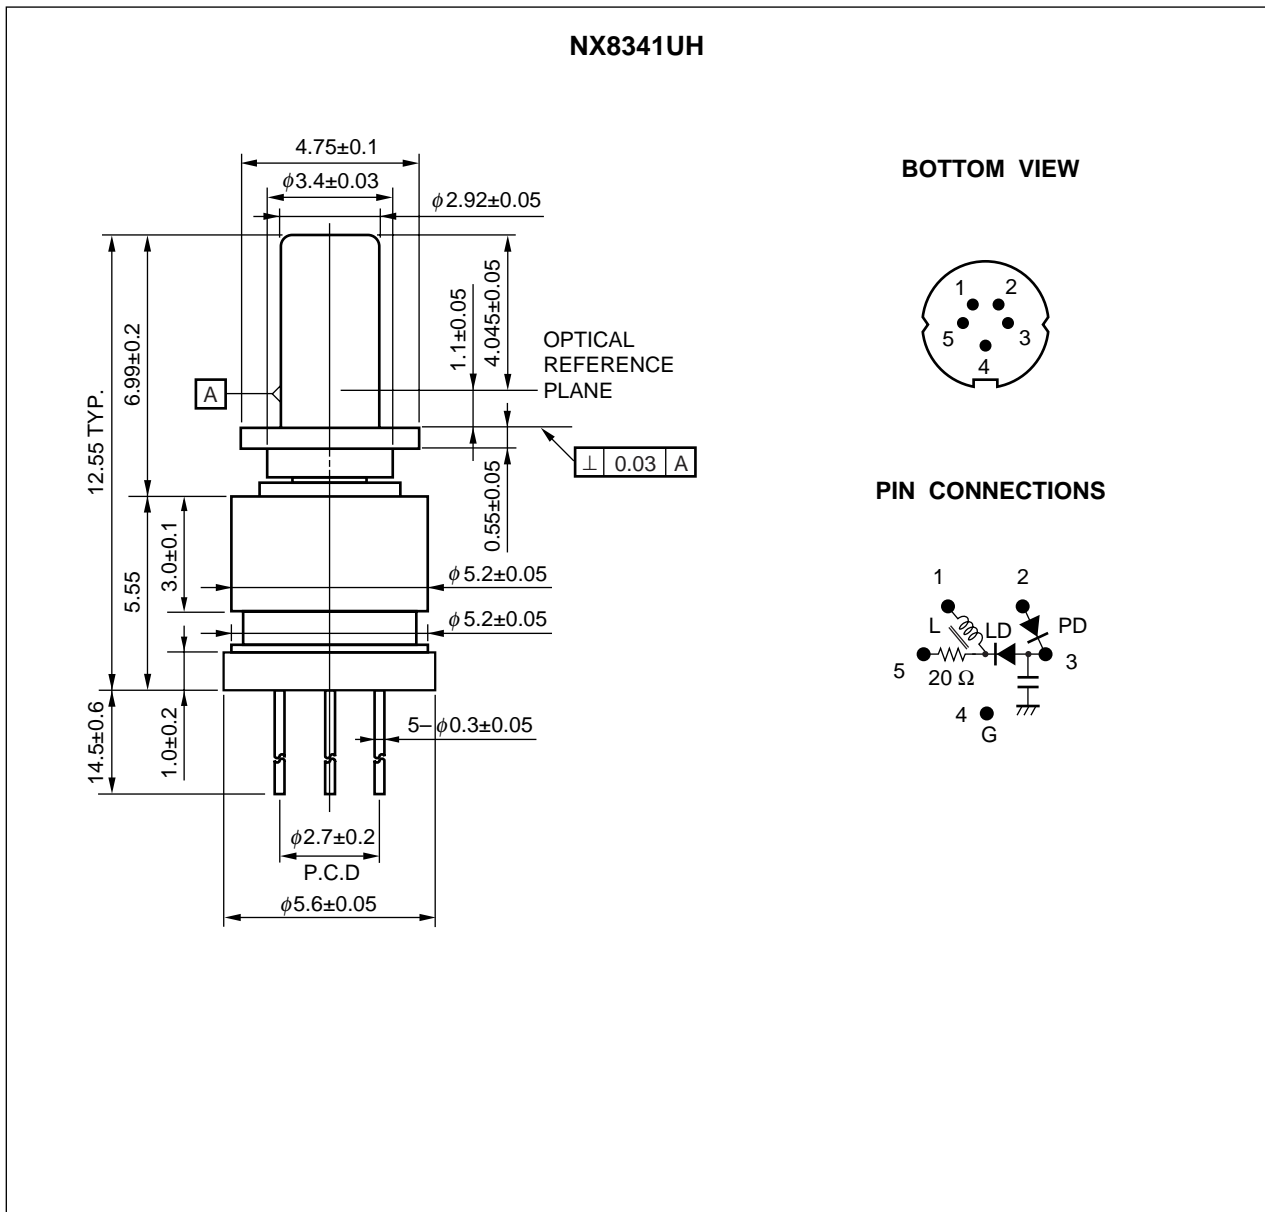


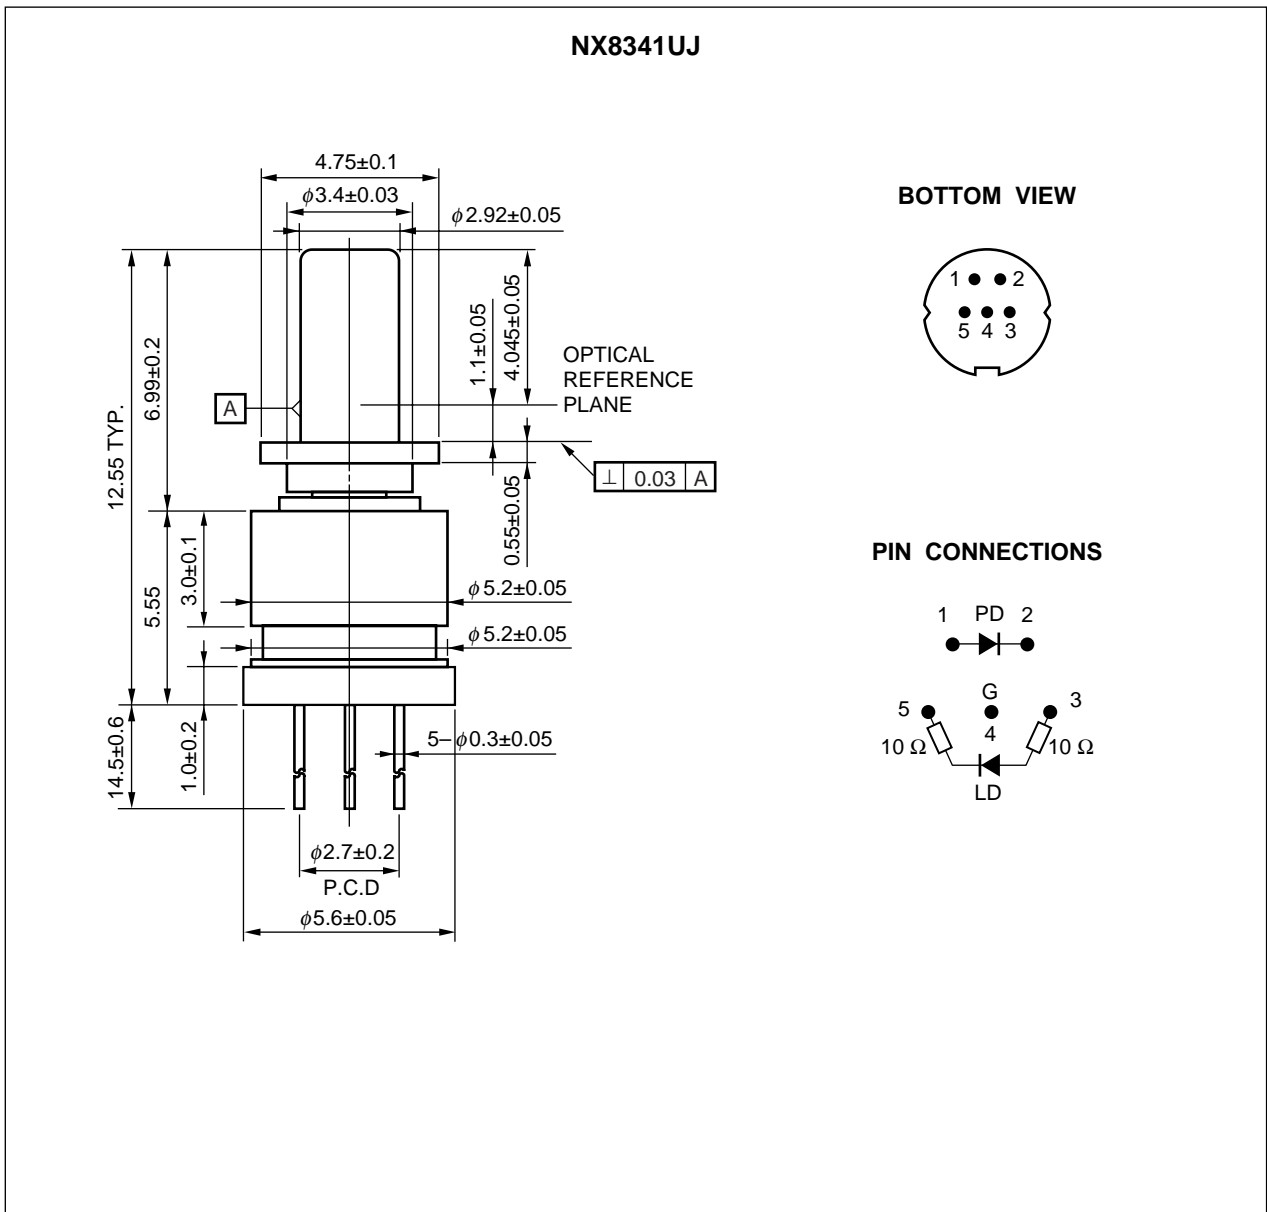

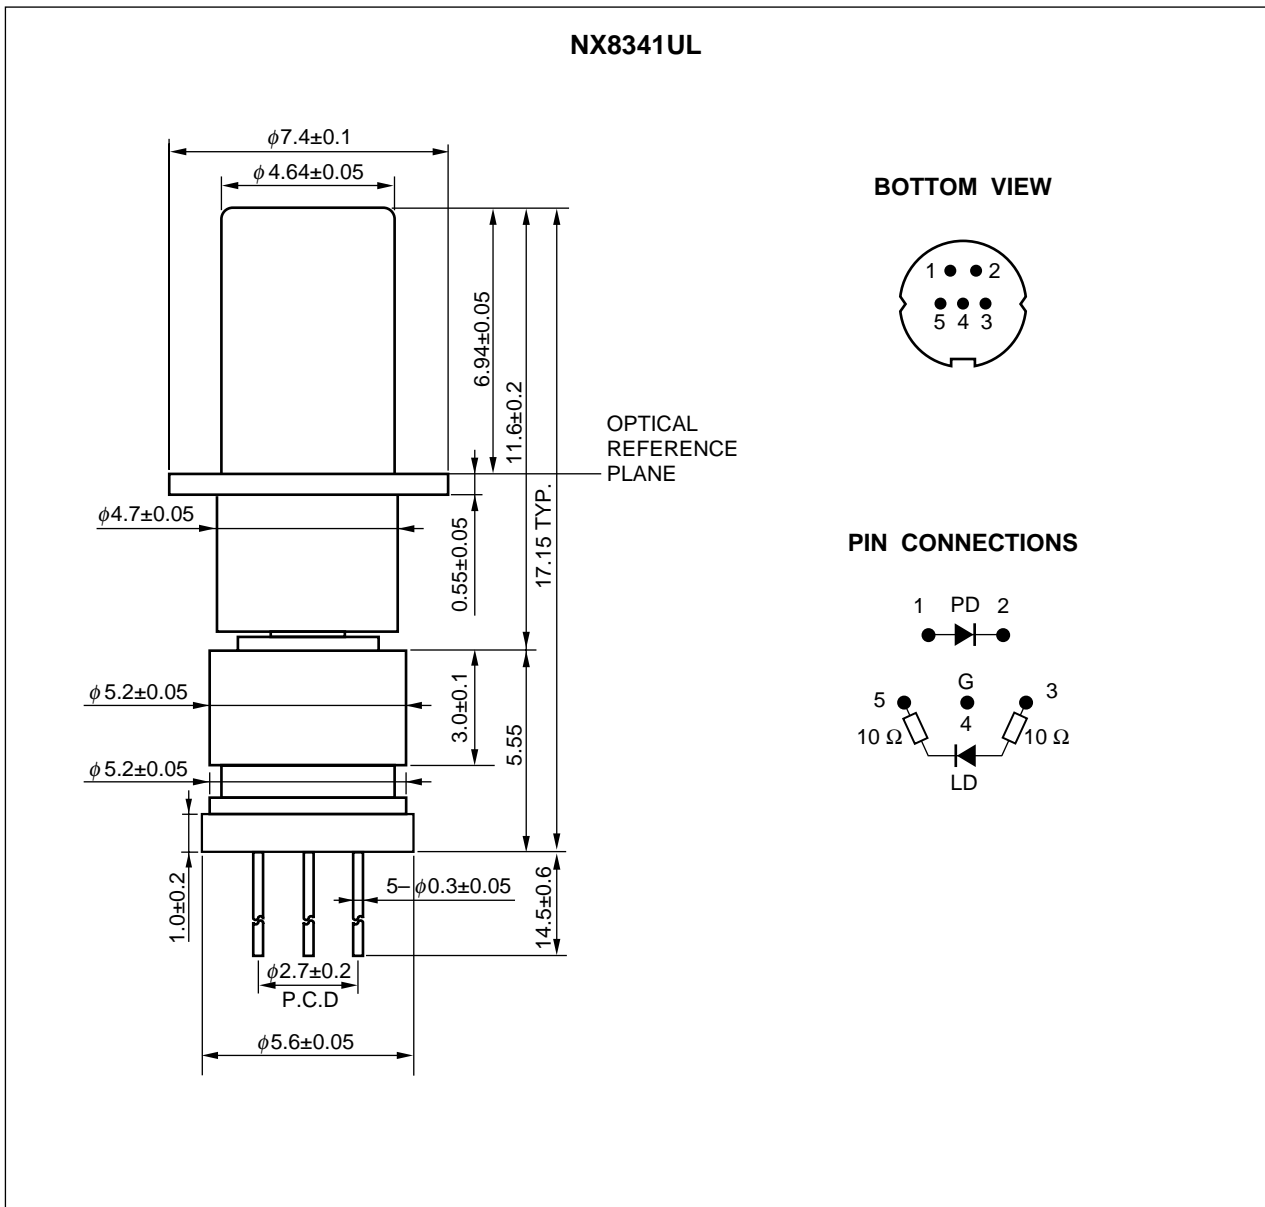




**NX8341UN**

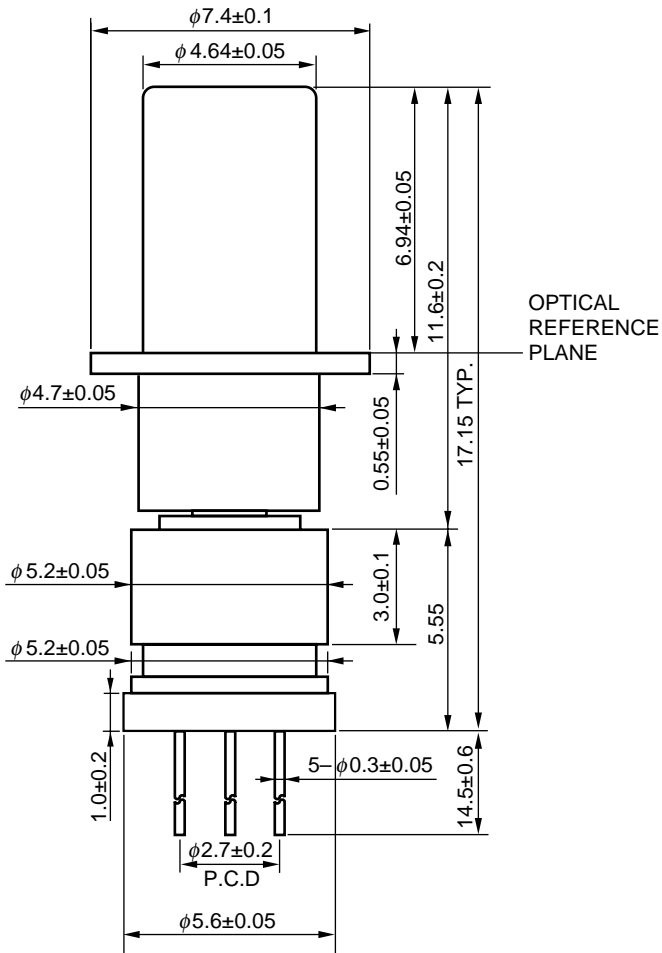


OPTICAL  
REFERENCE  
PLANE

**BOTTOM VIEW**



**PIN CONNECTIONS**



<R> **ORDERING INFORMATION**

Part Number	Receptacle Type	Note
NX8341TB-AZ*	LC, Electrically isolated	Differential input with flexible PCB
NX8341TJ-AZ*	LC	Differential input with flexible PCB
NX8341TL-AZ*	SC	Differential input with flexible PCB
NX8341UB-AZ*	LC, Electrically isolated	Differential input, 5-pin
NX8341UH-AZ*	LC	Single-ended, 5-pin
NX8341UJ-AZ*	LC	Differential input, 5-pin
NX8341UL-AZ*	SC	Differential input, 5-pin
NX8341UN-AZ*	SC	Single-ended, 5-pin

**\*NOTE:**

Please refer to the last page of this data sheet, "Compliance with EU Directives" for Pb-Free RoHS Compliance Information.

**ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Ratings	Unit
Storage Temperature	T <sub>stg</sub>	-40 to +85	°C
Operating Case Temperature	T <sub>C</sub>	-5 to +85	°C
Forward Current of LD	I <sub>FLD</sub>	120	mA
Reverse Voltage of LD	V <sub>RLD</sub>	2	V
Forward Current of PD	I <sub>FPD</sub>	10	mA
Reverse Voltage of PD	V <sub>RPD</sub>	20	V
Lead Soldering Temperature	T <sub>slid</sub>	350 (3.5 sec.)	°C
Optical Output Power	P <sub>f</sub>	5	mW


**ELECTRO-OPTICAL CHARACTERISTICS (Tc = -5 to +85°C, BOL, unless otherwise specified)**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Mean Optical Output Power	P <sub>r</sub>			-2		dBm
Peak Emission Wavelength	λ <sub>p</sub>	CW, P <sub>r</sub> = -2 dBm	1 290		1 330	nm
Side Mode Suppression Ratio	SMSR	CW, P <sub>r</sub> = -2 dBm	30			dB
Threshold Current	I <sub>th</sub>	CW, T <sub>c</sub> = 25°C		8	20	mA
		CW	2		40	
Differential Efficiency	η <sub>d</sub>	CW, P <sub>r</sub> = -2 dBm, T <sub>c</sub> = 25°C	0.02	0.025	0.04	W/A
		CW, P <sub>r</sub> = -2 dBm	0.005		0.05	
Operation Voltage	V <sub>op</sub>	CW, P <sub>r</sub> = -2 dBm			2	V
Monitor Current	I <sub>m</sub>	P <sub>r</sub> = -2 dBm, V <sub>R</sub> = 1.5 V *1	90		700	μA
Monitor Dark Current	I <sub>D</sub>	V <sub>R</sub> = 1.5 V, T <sub>c</sub> = 25°C			5	nA
		V <sub>R</sub> = 1.5 V			50	
Rise Time	t <sub>r</sub>	20-80% *1		30	50	ps
Fall Time	t <sub>f</sub>	20-80% *1		40	50	ps
Extinction Ratio	Ex	10 GbE, 10 G FC *1	4	5		dB
Tracking Error <sup>*2</sup>	γ		-1.0		1.0	dB
Input Impedance	Z <sub>in</sub>			25		Ω
Connector Repeatability	CR	With master pigtail	-1.0		1.0	dB

<R>

\*1 9.95/10.3/10.5 Gb/s, PRBS 2<sup>31</sup>-1, NRZ, Duty Cycle = 50%

\*2 Tracking Error: γ

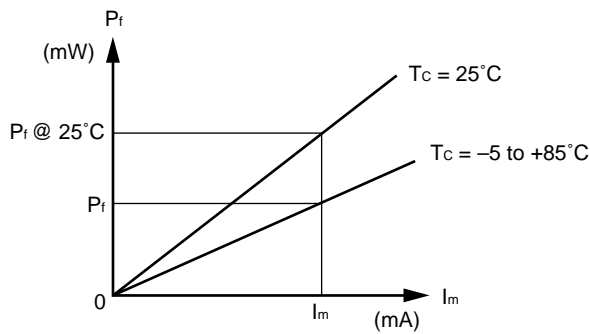

$$\gamma = \left| 10 \log \frac{P_r}{P_r @ 25^\circ\text{C}} \right| \text{ [dB]}$$

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (\*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL’s understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

Restricted Substance per RoHS	Concentration Limit per RoHS (values are not yet fixed)	Concentration contained in CEL devices	
		-A	-AZ
Lead (Pb)	< 1000 PPM	Not Detected	(*)
Mercury	< 1000 PPM	Not Detected	
Cadmium	< 100 PPM	Not Detected	
Hexavalent Chromium	< 1000 PPM	Not Detected	
PBB	< 1000 PPM	Not Detected	
PBDE	< 1000 PPM	Not Detected	

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

**Important Information and Disclaimer:** Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL’s liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.