


P 14

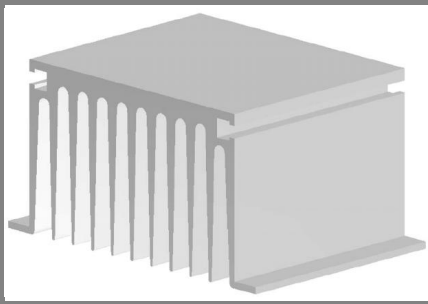

Heatsink


Standard lengths	n	b / d Ø mm	R_{thha} natural cooling K/W	R_{thha} $V_{air} = 4 \text{ m/s}$ K/W	w kg
P 14/120	1		0,84 (60W) 0,79 (80W)	0,34	1,15
	2		0,78 (60W) 0,73 (80W)	0,112	
	3		0,75 (60W) 0,71 (80W)	0,1	
P 14/180	2		0,60 (100W)	0,085	1,75
	3		0,58 (100W)	0,081	

For isolated power modules

P 14

Features

- Intended for power modules: the SEMIPACK and SEMITRANS ranges, and also for SEMIPONT bridge rectifier range
- Best suited for forced air cooling
- Available in various lengths

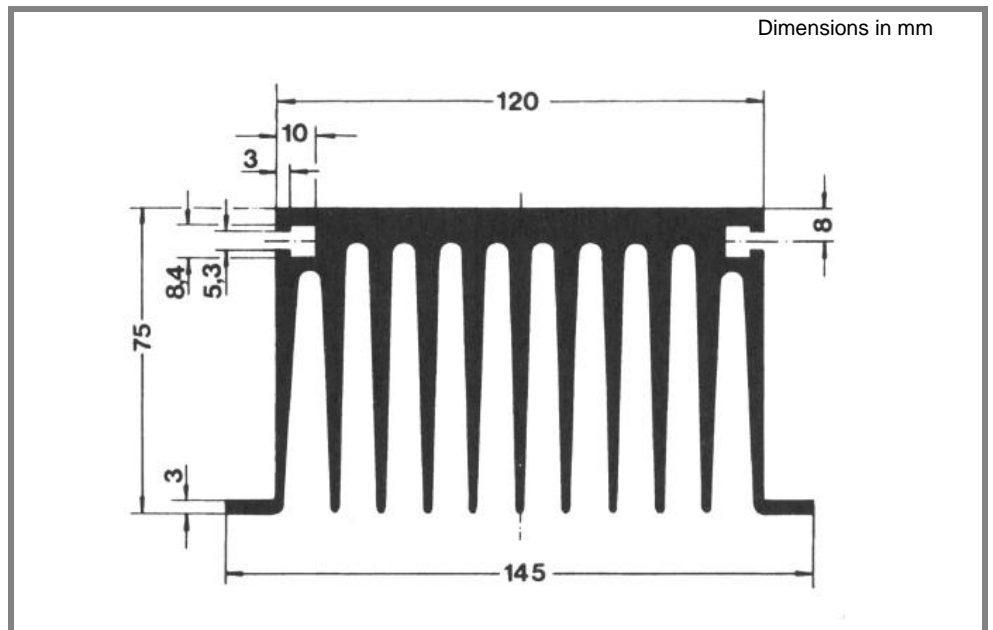

P 14 general profile dimensions (w = 9,6 kg/m)

