

## Features

### Regulated Converters

- 2.2W DIP Package
- 1kVDC Isolation
- Regulated Output
- UL94V-0 Package Material
- Continuous Short Circuit Protection
- Internal SMD design
- 100% Burned In
- Efficiency to 75%

**ECONOLINE**

DC/DC-Converter


# REC2.2-S\_DR/H1 Series

### Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)
REC2.2-xx3.3SR/H1	5, 12, 24, 48	3.3	600
REC2.2-xx05SR/H1	5, 12, 24, 48	5	440
REC2.2-xx09SR/H1	5, 12, 24, 48	9	244
REC2.2-xx12SR/H1	5, 12, 24, 48	12	183
REC2.2-xx15SR/H1	5, 12, 24, 48	15	146
REC2.2-xx05DR/H1	5, 12, 24, 48	±5	±220
REC2.2-xx09DR/H1	5, 12, 24, 48	±9	±122
REC2.2-xx12DR/H1	5, 12, 24, 48	±12	±92
REC2.2-xx15DR/H1	5, 12, 24, 48	±15	±73

xx = Input Voltage

## 2.2 Watt DIP24 Single & Dual Output




**RECOM**

### Specifications (Core Operating Area)




Input Voltage Range		±15%	
Output Voltage Accuracy		±3% typ.	
Line Voltage Regulation		±0.5% max	
Load Voltage Regulation (10% to 100% full load )		±1% max.	
Output Ripple and Noise (at 20MHz BW)		100mVp-p max.	
Operating Frequency		75kHz min.	
Efficiency at Full Load		65% min.	
No Load Power Consumption		200mW max.	
Isolation Voltage	(tested for 1 second)	1.000VDC min.	
Rated Working Voltage	(long term isolation)	see Application Notes	
Isolation Capacitance		30pF typ.	
Isolation Resistance		1 GΩ min.	
Short Circuit Protection		Continuous	
Operating Temperature Range (free air convection)		-40°C to +80°C (see Graph)	
Storage Temperature Range		-50°C to +125°C	
Relative Humidity	MSL Level 1	95% RH	
Thermal Impedance	Natural convection	20°C/W for metal case	
Package Weight		12 g	
MTBF (+25°C)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	1000 x 10 <sup>3</sup> hours
(+80°C)		using MIL-HDBK 217F	150 x 10 <sup>3</sup> hours

## Derating-Graph (Ambient Temperature)

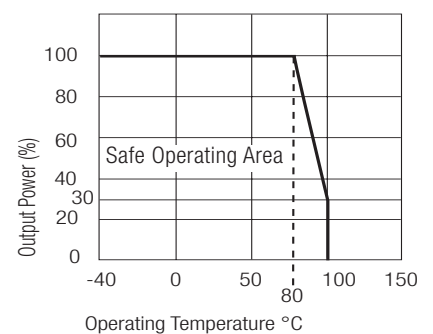


**Package Style and Pinning (mm)**

24 PIN DIP Package

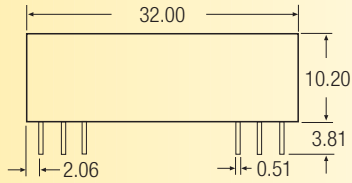

Recommended Footprint Details

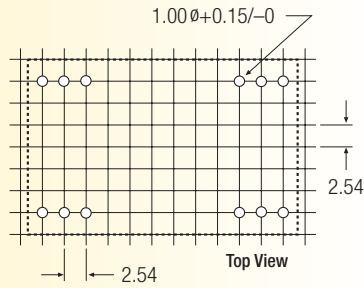

Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	No Pin	-Vout
3	No Pin	Com
10	-Vout	Com
11	+Vout	+Vout
12	-Vin	-Vin
13	-Vin	-Vin
14	+Vout	+Vout
15	-Vout	Com
22	No Pin	Com
23	No Pin	-Vout
24	+Vin	+Vin

XX.X ± 0.5 mm  
XX.XX ± 0.25 mm