



- **Ideal for 311.063 MHz Transmitters in Korea**
- **Very Low Series Resistance**
- **Quartz Stability**
- **Rugged, Hermetic, Low-Profile TO39 Case**
- **Complies with Directive 2002/95/EC (RoHS)**



The RO2149 is a true one-port, surface-acoustic-wave (SAW) resonator in a low-profile TO39 case. It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency transmitters operating at 311.063 MHz. This resonator is designed for wireless remote-control and wireless security transmitters operating in Korea.

#### Absolute Maximum Ratings

Rating	Value	Units
CW RF Power Dissipation (See: Typical Test Circuit)	+0	dBm
DC Voltage Between Any Two Pins (Observe ESD Precautions)	±30	VDC
Case Temperature	-40 to +85	°C

**RO2149**

**311.063 MHz  
SAW  
Resonator**



**TO39-3 Case**

#### Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency (+25 °C) Absolute Frequency	$f_C$	2, 3, 4, 5	310.988		311.138	MHz
	$\Delta f_C$				±75	kHz
Insertion Loss	IL	2, 5, 6		1.5	2.0	dB
Quality Factor	Unloaded Q	5, 6, 7		TBD		
	50 $\Omega$ Loaded Q			TBD		
Temperature Stability	Turnover Temperature	6, 7, 8	10	25	40	°C
	Turnover Frequency			$f_C$		
	Frequency Temperature Coefficient			0.037		ppm/°C <sup>2</sup>
Frequency Aging	Absolute Value during the First Year	1		≤10		ppm/yr
DC Insulation Resistance between Any Two Pins		5	1.0			M $\Omega$
RF Equivalent RLC Model	Motional Resistance	5, 7, 9		TBD	26	$\Omega$
	Motional Inductance			TBD		$\mu$ H
	Motional Capacitance			TBD		fF
	Pin 1 to Pin 2 Static Capacitance	5, 6, 9		TBD		pF
Transducer Static Capacitance		5, 6, 7, 9		TBD		pF
Test Fixture Shunt Inductance	$L_{TEST}$	2, 7		TBD		nH
Lid Symbolization (in Addition to Lot and/or Date Codes)		RO2149				



**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


#### Notes:

1. Frequency aging is the change in  $f_C$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
2. The center frequency,  $f_C$ , is measured at the minimum insertion loss point,  $IL_{MIN}$ , with the resonator in the 50  $\Omega$  test system (VSWR ≤ 1.2:1). The shunt inductance,  $L_{TEST}$ , is tuned for parallel resonance with  $C_O$  at  $f_C$ . Typically,  $f_{OSCILLATOR}$  or  $f_{TRANSMITTER}$  is less than the resonator  $f_C$ .
3. One or more of the following United States patents apply: 4,454,488 and 4,616,197 and others pending.
4. Typically, equipment designs utilizing this device require emissions testing and government approval, which is the responsibility of the equipment manufacturer.
5. Unless noted otherwise, case temperature  $T_C$  = +25°C±2°C.
6. The design, manufacturing process, and specifications of this device are subject to change without notice.
7. Derived mathematically from one or more of the following directly measured parameters:  $f_C$ , IL, 3 dB bandwidth,  $f_C$  versus  $T_C$ , and  $C_O$ .
8. Turnover temperature,  $T_O$ , is the temperature of maximum (or turnover) frequency,  $f_C$ . The nominal frequency at any case temperature,  $T_C$ , may be calculated from:  $f = f_O [1 - FTC (T_O - T_C)^2]$ . Typically,  $oscillator T_O$  is 20°C less than the specified  $resonator T_O$ .
9. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance  $C_O$  is the static (nonmotional) capacitance between pin1 and pin 2 measured at low frequency (10 MHz) with a capacitance meter. The measurement includes case parasitic capacitance with a floating case. For usual grounded case applications (with ground connected to either pin 1 or pin 2 and to the case), add approximately 0.25 pF to  $C_O$ .

## Electrical Connections

This one-port, two-terminal SAW resonator is bidirectional. The terminals are interchangeable with the exception of circuit board layout.


Pin	Connection
1	Terminal 1
2	Terminal 2
3	Case Ground




## Typical Test Circuit

The test circuit inductor,  $L_{TEST}$ , is tuned to resonate with the static capacitance,  $C_O$  at  $F_C$ .

### Electrical Test:

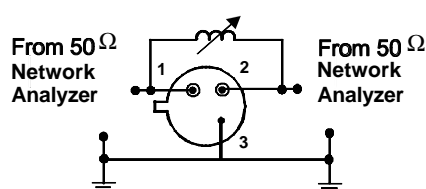


### Power Test:

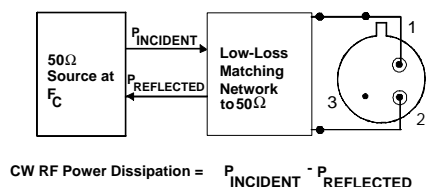


## Typical Application Circuits

### Typical Low-Power Transmitter Application:

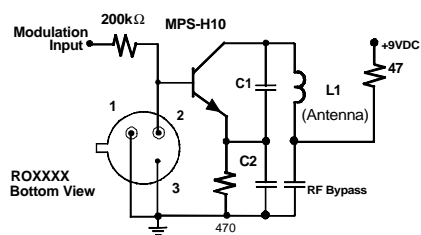


### Typical Local Oscillator Application:

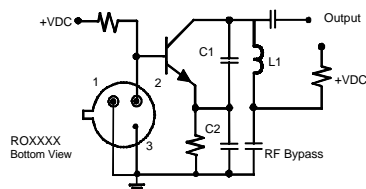


## Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include oscillator temperature characteristics.

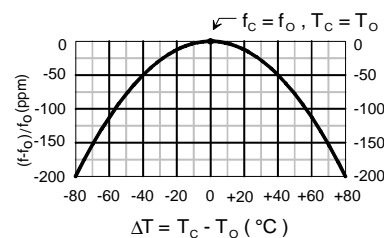


## Equivalent LC Model

The following equivalent LC model is valid near resonance:

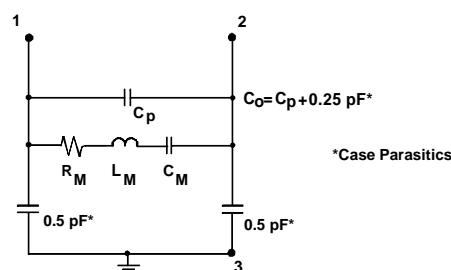

## Case Design

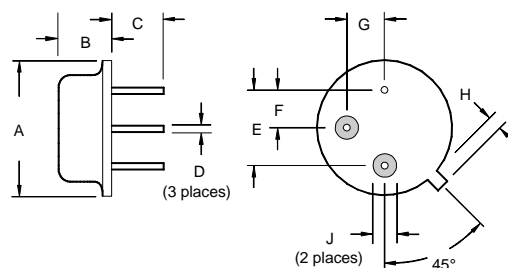

Dimensions	Millimeters		Inches	
	Min	Max	Min	Max
A		9.40		0.370
B		3.18		0.125
C	2.50	3.50	0.098	0.138
D	0.46 Nominal		0.018 Nominal	
E	5.08 Nominal		0.200 Nominal	
F	2.54 Nominal		0.100 Nominal	
G	2.54 Nominal		0.100 Nominal	
H		1.02		0.040
J	1.40		0.055	