

unit : mm

Epitaxial planar NPN silicon transistor

Description

• Dual chip digital transistor

Features

- Two SRC1202 chips in SOT-353 package
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process

Ordering Information

Type NO.	Marking	Package Code	
SUR527H	27H	SOT-353	

Outline Dimensions

1.95~2.25 0.65 Typ. • Equivalent Circuit 1.15~1.35 0.30 Max. R1≷ 5 1• Tr2 1.90~2.10 2 3 4 \mathbf{R}_1 R_2 0.65 Typ. 10KΩ 10KΩ Tr1 Tr2 10KΩ 10KΩ 0.85~0.95 **PIN Connections** 1. IN 1 2. COMMON 1,2 0.25 Min. 3. IN 2 0.19 Max. 0.10 Max. 4. OUT 2 5. OUT 1

1

SUR527H

Absolute Maximum Ratings [Tr1,Tr2]

Absolute Maximum Ratings [Tr1	(Ta=25°C)		
Characteristic	Symbol	Rating	Unit
Output voltage	Vo	50	V
Input voltage	VI	30,-10	V
Output current	I _O	100	mA
Power dissipation	P _D *	200	mW
Junction temperature	Tյ	150	°C
Storage temperature range	T _{stg}	-55 ~ 150	°C


*: Total rating

Electrical Characteristics [Tr1.Tr2]

Electrical Characteristics [Tr1,Tr2]					(Ta=25°C)	
Characteristic	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Output cut-off current	$I_{O(OFF)}$	V ₀ =50V, V _I =0	-	-	500	nA
DC current gain	GI	V ₀ =5V, I ₀ =10mA	50	80	-	-
Output voltage	V _{O(ON)}	$I_0=10$ mA, $I_I=0.5$ mA	-	0.1	0.3	V
Input voltage (ON)	V _{I(ON)}	V ₀ =0.2V, I ₀ =5mA	-	1.8	2.4	V
Input voltage (OFF)	$V_{I(OFF)}$	V ₀ =5V, I ₀ =0.1mA	1.0	1.2	-	V
Transition frequency	f _T *	$V_0=10V$, $I_0=5mA$, f=1MHz	-	200	-	MHz
Input current	II	V _I =5V, I _O =0	-	-	0.88	mA
Input resistor (Input to base)	R ₁	-	7	10	13	KΩ
Input resistor (Base to common)	R ₂	-	7	10	13	KΩ

* : Characteristic of transistor only

Electrical Characteristic Curves [Tr1,Tr2]

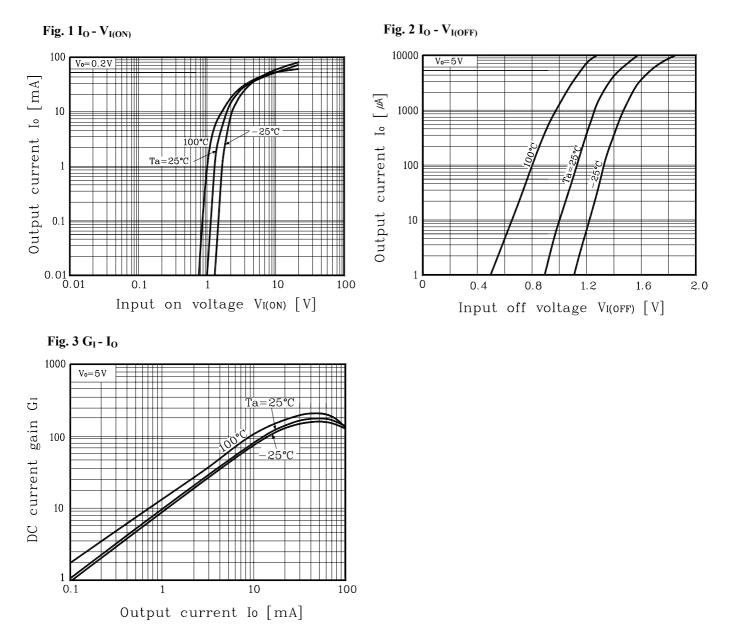

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.