

FEATURES

- 3.3V and 5V power supply option
- 300ps typical propagation delay
- Differential LVPECL outputs
- I_{CC} Max 25mA
- PNP LVTTTL inputs for minimal loading
- Flow-through pinouts
- Q outputs will default HIGH with inputs open
- Max. frequency range 800MHz
- Available in 8-pin MSOP and SOIC package


DESCRIPTION

The SY100EPT22V is a dual TTL/CMOS to differential PECL translator. Capable of running from a 3.3 or 5V supply, the part can be used in either LVTTTL/LVCMOS/LVPECL or TTL/CMOS/PECL systems.

The device only requires a single positive supply of 3.3V or 5V - no negative supply is required.

The tiny 8-pin MSOP package and the low skew, dual gate design of the EPT22V makes it ideal for those applications where space, performance, and low power are at a premium.

PIN CONFIGURATION/BLOCK DIAGRAM

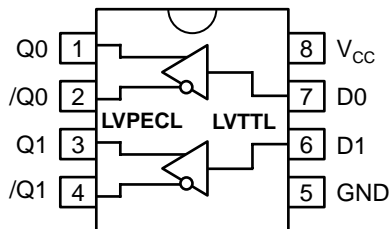

(Available in 8-pin SOIC and 8-pin MSOP)

PIN NAMES

Pin	Function
Q ₀ , /Q ₀ , Q ₁ , /Q ₁	Differential LVPECL Outputs
D ₀ , D ₁	LVTTTL Inputs
V _{CC}	Positive Supply
GND	Ground

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Symbol	Parameter	Value	Unit
V_{CC}	Power Supply Voltage	-0.5 to +7.0	V
V_I	TTL Input Voltage	-0.5 to V_{CC}	V
I_I	TTL Input Current	-30 to +5.0	mA
I_O	PECL Output Current — Continuous — Surge	50 100	mA
T_{store}	Storage Temperature	-65 to +150	°C
T_A	Operating Temperature	-40 to +85	°C

TRUTH TABLE

D	Q	/Q
H	H	L
L	L	H
Open	H	L

NOTE:

- Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to ABSOLUTE MAXIMUM RATING conditions for extended periods may affect device reliability.

DC ELECTRICAL CHARACTERISTICS⁽¹⁾

$$V_{CC} = +3.3V \pm 5\% \text{ or } +5.0V \pm 5\%$$

Symbol	Parameter	$T_A = -40^\circ\text{C}$		$T_A = 0^\circ\text{C}$		$T_A = +25^\circ\text{C}$		$T_A = +85^\circ\text{C}$		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
I_{CC}	Power Supply Current	—	25	—	25	—	25	—	25	mA	—

NOTE:

- Parametric values specified at:

3 volt Power Supply Range	100EPT22V Series:	+3.0V to +3.8V.
5 volt Power Supply Range	100EPT22V Series:	+4.2V to +5.5V.

TTL DC ELECTRICAL CHARACTERISTICS⁽¹⁾

$$V_{CC} = +3.3V \pm 5\% \text{ or } +5.0V \pm 5\%$$

Symbol	Parameter	$T_A = -40^\circ\text{C}$		$T_A = 0^\circ\text{C}$		$T_A = +25^\circ\text{C}$		$T_A = +85^\circ\text{C}$		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
V_{IH}	Input HIGH Voltage	2.0	—	2.0	—	2.0	—	2.0	—	V	—
V_{IL}	Input LOW Voltage	—	0.8	—	0.8	—	0.8	—	0.8	V	—
I_{IH}	Input HIGH Current	—	20 100	—	20 100	—	20 100	—	20 100	μA	$V_{IN} = 2.7V$ $V_{IN} = V_{CC}$
I_{IL}	Input LOW Current	—	-0.2	—	-0.2	—	-0.2	—	-0.2	mA	$V_{IN} = 0.5V$
V_{IK}	Input Clamp Voltage	—	-1.2	—	-1.2	—	-1.2	—	-1.2	V	$I_{IN} = -18mA$

NOTE:

- Parametric values specified at:

3 volt Power Supply Range	100EPT22V Series:	+3.0V to +3.8V.
5 volt Power Supply Range	100EPT22V Series:	+4.2V to +5.5V.

PECL DC ELECTRICAL CHARACTERISTICS⁽¹⁾ $V_{CC} = +3.3V \pm 5\%$ or $+5.0V \pm 5\%$

Symbol	Parameter	$T_A = -40^\circ\text{C}$			$T_A = 0^\circ\text{C}$			$T_A = +25^\circ\text{C}$			$T_A = +85^\circ\text{C}$			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
V_{OH}	Output HIGH Voltage ⁽²⁾ 100EPT	2220	—	2420	2275	—	2420	2275	—	2420	2275	—	2420	mV
V_{OL}	Output LOW Voltage ⁽²⁾ 100EPT	1470	—	1750	1490	—	1680	1490	—	1680	1490	—	1680	mV

NOTES:

- Parametric values specified at:

3 volt Power Supply Range	100EPT22V Series:	+3.0V to +3.8V.
5 volt Power Supply Range	100EPT22V Series:	+4.2V to +5.5V.
- These values are for $V_{CC} = 3.3V$. Level Specifications will vary 1:1 with V_{CC} .

AC ELECTRICAL CHARACTERISTICS⁽¹⁾ $V_{CC} = +3.3V \pm 5\%$ or $+5.0V \pm 5\%$

Symbol	Parameter	$T_A = -40^\circ\text{C}$		$T_A = 0^\circ\text{C}$		$T_A = +25^\circ\text{C}$		$T_A = +85^\circ\text{C}$		Unit	Condition
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.		
t_{PLH} t_{PHL}	Propagation Delay to Output D, ENECL/ENTTL	100	600	100	600	100	600	100	600	ps	50Ω to $V_{CC} - 2.0V$
t_{skpp}	Part-to-Part Skew ⁽²⁾	—	500	—	500	—	500	—	500	ps	50Ω to $V_{CC} - 2.0V$
t_{skew}	Within-Device Skew ^(2,3)	—	100	—	100	—	100	—	100	ps	50Ω to $V_{CC} - 2.0V$
t_r t_f	Output Rise/Fall Time 20% to 80%	200	500	200	500	200	500	200	500	ps	50Ω to $V_{CC} - 2.0V$
f_{MAX}	Maximum Toggle Frequency	—	800	—	800	—	800	—	800	MHz	50Ω to $V_{CC} - 2.0V$

NOTES:

- Parametric values specified at:

3 volt Power Supply Range	100EPT22V Series:	+3.0V to +3.8V.
5 volt Power Supply Range	100EPT22V Series:	+4.2V to +5.5V.
- Guaranteed, but not tested.
- Same transition @common V_{CC} levels.


PRODUCT ORDERING CODE**3.3V**

Ordering Code	Package Type	Operating Range	Vcc Range (V)
SY100EPT22VZC	Z8-1	Commercial	+3.3V $\pm 5\%$
SY100EPT22VZCTR	Z8-1	Commercial	+3.3V $\pm 5\%$
SY100EPT22VKC	K8-1	Commercial	+3.3V $\pm 5\%$
SY100EPT22VKCTR	K8-1	Commercial	+3.3V $\pm 5\%$

5V



Ordering Code	Package Type	Operating Range	Vcc Range (V)
SY100EPT22VZC	Z8-1	Commercial	+5.0V $\pm 5\%$
SY100EPT22VZCTR	Z8-1	Commercial	+5.0V $\pm 5\%$
SY100EPT22VKC	K8-1	Commercial	+5.0V $\pm 5\%$
SY100EPT22VKCTR	K8-1	Commercial	+5.0V $\pm 5\%$

8 LEAD PLASTIC SOIC (Z8-1)

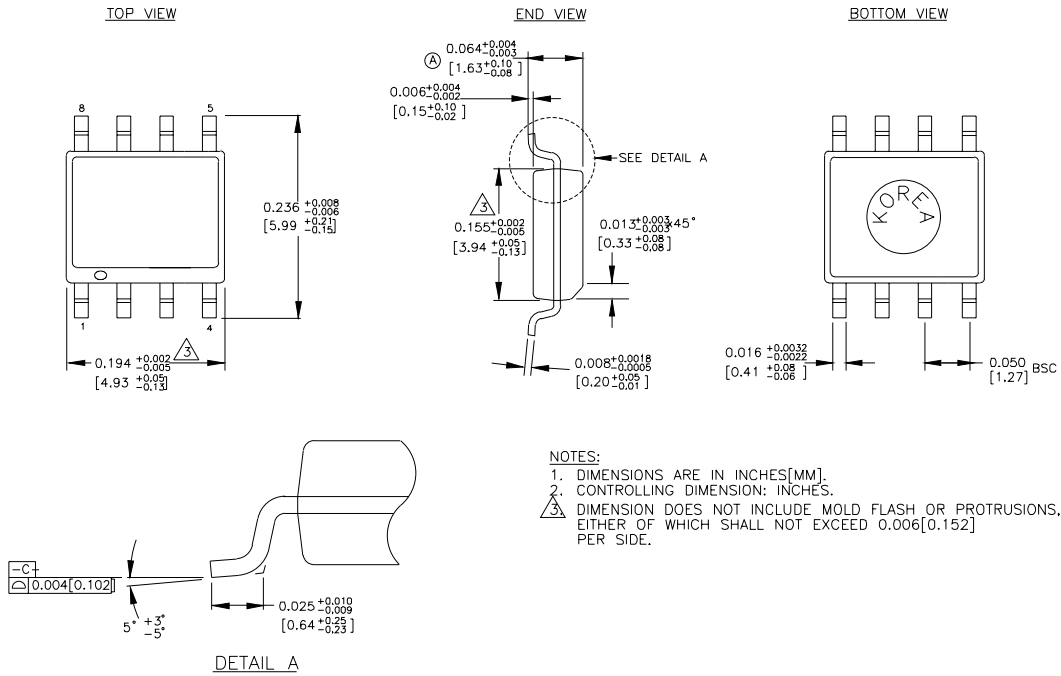

Rev. 03

8 LEAD MSOP (K8-1)

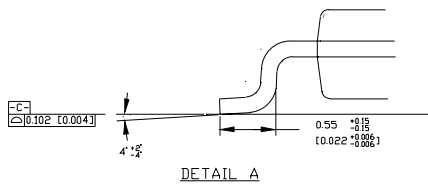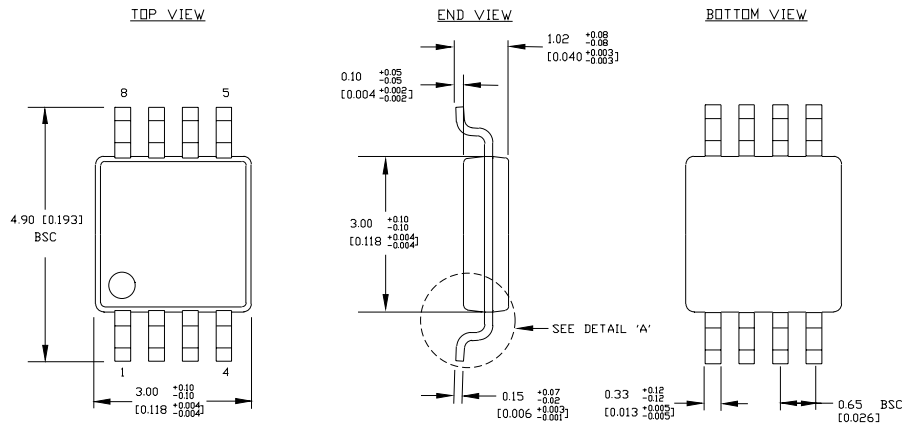

- NOTES:**
1. DIMENSIONS ARE IN MM [INCHES].
 2. CONTROLLING DIMENSION: MM
 3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.20 [0.008] PER SIDE.

Rev. 01

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USA

TEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated
