

1. Measurement condition

Ambient temperature T_A :	23 °C
Input power level:	0 dBm.
Terminating impedances in f_C :	for input: 19 Ω - 52 pF.
	for output: 38 Ω - 64 pF.

2. Characteristics

Remark:

Reference level for the relative attenuation a_{rel} of the TFS 100C is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The reference frequency f_C is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The temperature coefficient of frequency T_C is valid both for the reference frequency f_C and the frequency response of the filter in the operating temperature range. **The bandwidth shift of the filter in the operating temperature range (OTR) is included in the production tolerance scheme.**

Data	typ. value	tolerance / limit	
Insertion loss (Reference level) a_e	22,5 dB	max. 25 dB	
Centre frequency f_C at ambient temperature (f_{CAT})	100,0 MHz	100,0 \pm 0,10 MHz	
Pass band (PB) at ambient temperature :		$f_C - 2,9$ MHz ... $f_C + 2,9$ MHz	
Amplitude ripple in PB (p-p):	0,6...0,8 dB	max. 1,30 dB	
Bandwidth :	at T_A	in OTR	
1 dB - band width	5,88 MHz		
1,3 dB - band width	5,91 MHz	min 5,8 MHz	
3 dB - band width	6,06 MHz	min. 6,0 MHz	
20 dB - band width	6,57 MHz		
33 dB - band width	6,75 MHz	max. 6,8 MHz	
40 dB - band width	6,84 MHz		
43 dB - band width	6,90 MHz	max. 7,2 MHz	
48 dB - band width	7,10 MHz	max. 8,0 MHz	
Relative attenuation a_{rel} :			
f_C	$f_C \pm 2,9$ MHz	0,8 dB	max. 1,3 dB
$f_C \pm 2,9$ MHz	$f_C \pm 3,0$ MHz	2,5 dB	max. 3 dB
$f_C \pm 3,4$ MHz	$f_C \pm 3,6$ MHz	36 dB	min. 33 dB
$f_C \pm 3,6$ MHz	$f_C \pm 4,0$ MHz	49...52 dB	min. 43 dB
$f_C \pm 4,0$ MHz	$f_C \pm 17,1$ MHz	50...60 dB	min. 48 dB
$f_C \pm 17,1$ MHz	$f_C \pm 92$ MHz	55...70 dB	min. 50 dB
Group delay (mean value in PB):	2,89 μ s	max. 3,4 μ s	
Group delay ripple in PB (p-p):	130...150 ns	max. 170 ns	
Deviation from linear phase in PB:	5...7°		
Triple transit attenuation compared to main signal:	47 dB		
Crosstalk:	50...60 dB		
Temperature coefficient of frequency (T_C)	- 20 ppm/K		
Frequency deviation of f_C over temperature	$\Delta f_C(\text{Hz}) = T_C(\text{ppm/K}) \times (T - T_A) \times f_{CTA}(\text{MHz})$		
Operating temperature range (OTR) :	- 25 °C ... + 80 °C		
Storage temperature range (STR) :	- 40 °C ... + 85 °C		

Generated:

Wadim Dunzow

Checked/Approved:

Dr. Bert Wall

VI TELEFILTER

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

Vectron International, Inc.

267 Lowell Road


Hudson, NH 03051 / USA

Tel: (603) 598-0070 Fax: (603) 598-0075


Email: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

3. Package, pin grid 2,54 mm (All dimensions in mm)

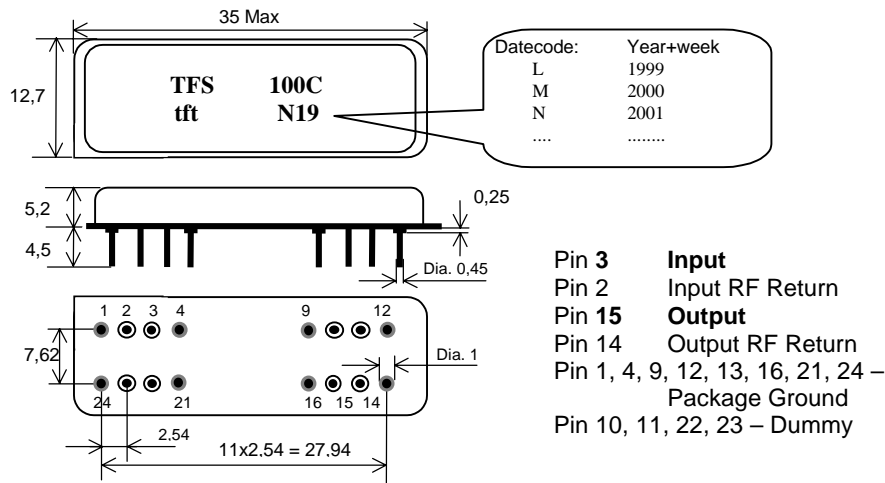

4. 50 Ω - Matching network (scheme 1, see Application Note):

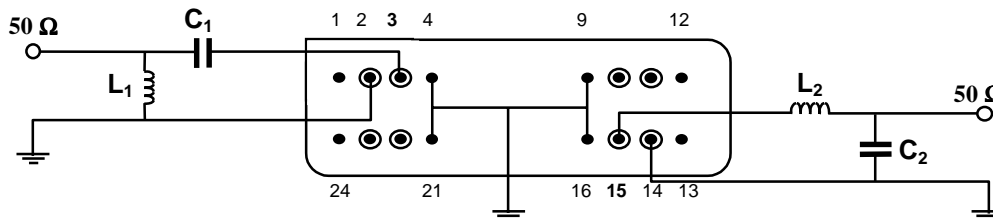

VI TELEFILTER

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

Vectron International, Inc.

267 Lowell Road

Hudson, NH 03051 / USA

Tel: (603) 598-0070 Fax: (603) 598-0075

Email: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

5. Stability characteristics :

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Damp heat:
(cycle) 25 °C to 55°C / 95% r.H. / 10 cycles
DIN IEC 68 - 2 – 30 Db
4. Resistance to
solder heat (reflow): max. 2 times reflow process;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

6. Soldering temperature conditions :

1st and 2nd soldering temperature profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

Soldering temperature profile

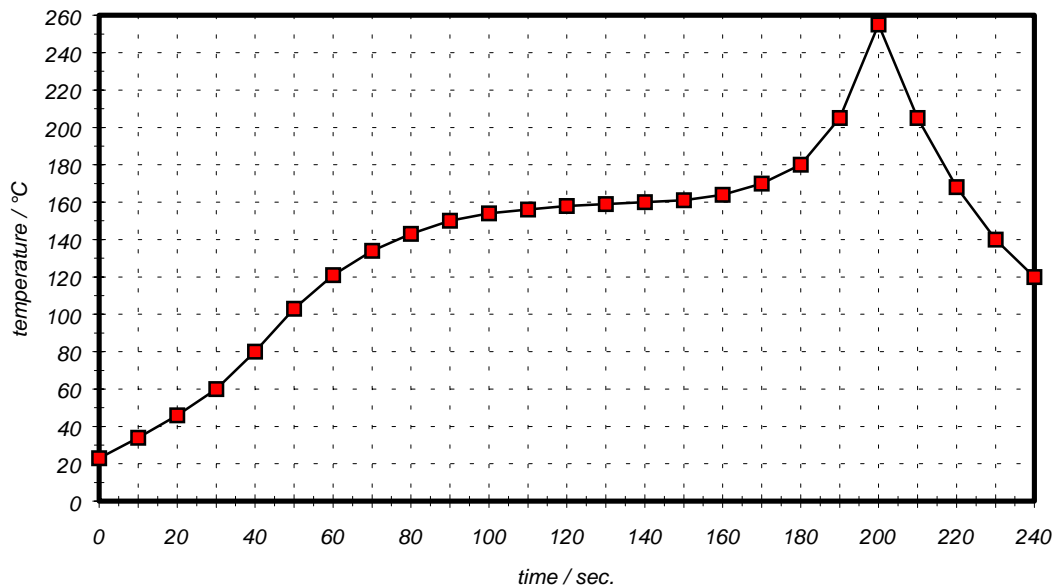


Table for temperature vs. time during the soldering process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

7. History :

Version	Reason of Changes	Name	Date
1.0	- edit customer Development Specification.	Dunzow	17 April 2000
Preliminary Specification: 1.1	- add and correct typical values of filter ; - add termination impedances of matching networks ; - add matching network configuration.	Dunzow	20 April 2001