

TPA4499 is a 1 :1 high impedance transformer with the following features.


- Low profile.
- Conforming to FCC part 68 and CS 03 regulations.
- High inductance.
- Low bridging and insertion losses.
- Low cost.

Applications:

Bridging a telephone line with a high impedance where a low bridging loss is required.



MECHANICAL

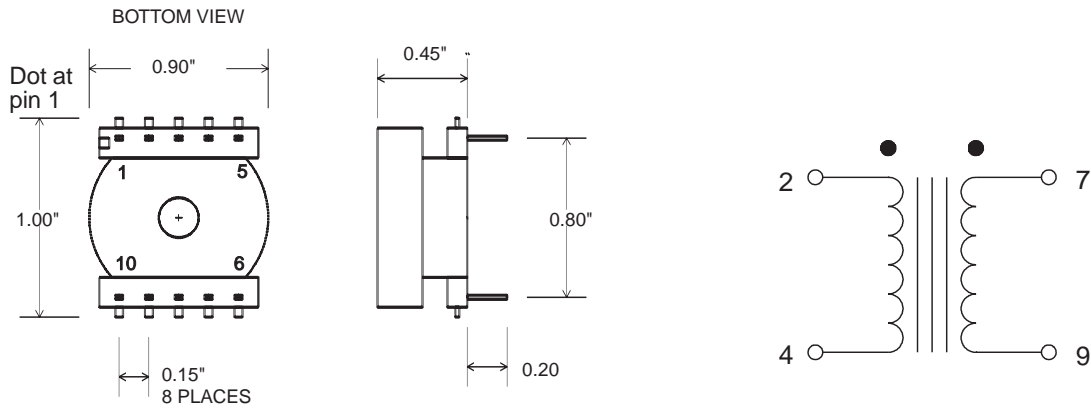

All dimensions are in inches

ELECTRICAL

| | | |
|----------------------|---------------|---------------------------------------|
| Frequency | 300 - 3400 Hz | 200 Hz - 3500 KHz |
| Inductance | > 3.0 H | |
| Longitudinal Balance | > 65 dB | 200 - 3500 Hz |
| Turns Ratio | 1 : 1 | |
| Dielectric Strength | 1000 Vrms | winding to winding & Windings to core |

ISSUE: E 95/04/05 TPA4499