



# TSB1132

## Low Frequency PNP Transistor

**SOT-89**



Pin assignment:

1. Base
2. Collector
3. Emitter

**$BV_{CEO} = - 32V$**

**$I_C = - 1A$**

**$V_{CE(SAT)}, = - 0.15V(\text{typ.}) @I_C / I_B = - 0.5A / - 50mA$**

### Features

- ✧ Low  $V_{CE(SAT)}$ .
- ✧ Excellent DC current gain characteristics

### Structure

- ✧ Epitaxial planar type.
- ✧ PNP silicon transistor

### Ordering Information

| Part No.  | Packing     | Package | Marking |
|-----------|-------------|---------|---------|
| TSB1132CY | Tape & Reel | SOT-89  | BK      |

### Absolute Maximum Rating (Ta = 25 °C unless otherwise noted)

| Parameter  | Symbol    | Limit        | Unit           |
|--|-----------|--------------|----------------|
| Collector-Base Voltage                           | $V_{CBO}$ | - 40V        | V              |
| Collector-Emitter Voltage                        | $V_{CEO}$ | - 32V        | V              |
| Emitter-Base Voltage                             | $V_{EBO}$ | - 5          | V              |
| Collector Current                                | $I_C$     | DC           | - 1            |
|  |           | Pulse        | - 2.5 (note 1) |
| Collector Power Dissipation                      | SOT-89    | $P_D$        | 0.6            |
|  |           |              | 2 (note 2)     |
| Operating Junction Temperature                   | $T_J$     | +150         | °C             |
| Operating Junction and Storage Temperature Range | $T_{STG}$ | - 55 to +150 | °C             |

Note: 1. Single pulse,  $P_w = 10mS$ , Duty  $\leq 50\%$

2. When mounted on a 40 x 40 x 0.7mm ceramic board

### Electrical Characteristics

Ta = 25 °C unless otherwise noted

| Parameter                            | Conditions                                     | Symbol        | Min  | Typ    | Max   | Unit    |
|--------------------------------------|--|---------------|------|--------|-------|---------|
| <b>Static</b>                        |  |               |      |        |       |         |
| Collector-Base Voltage               | $I_C = - 50\mu A, I_E = 0$                     | $BV_{CBO}$    | - 40 |        |       | V       |
| Collector-Emitter Breakdown Voltage  | $I_C = - 1mA, I_B = 0$                         | $BV_{CEO}$    | - 32 |        |       | V       |
| Emitter-Base Breakdown Voltage       | $I_E = - 50\mu A, I_C = 0$                     | $BV_{EBO}$    | - 5  |        |       | V       |
| Collector Cutoff Current             | $V_{CB} = - 20V, I_E = 0$                      | $I_{CBO}$     |      |        | - 0.5 | $\mu A$ |
| Emitter Cutoff Current               | $V_{EB} = - 4V, I_C = 0$                       | $I_{EBO}$     |      |        | -0.5  | $\mu A$ |
| Collector-Emitter Saturation Voltage | $I_C / I_B = - 500mA / - 50mA$                 | $V_{CE(SAT)}$ |      | - 0.15 | - 0.5 | V       |
| DC Current Transfer Ratio            | $V_{CE} = - 3V, I_C = - 0.1A$                  | $h_{FE}$      | 82   |        | 390   |         |
| Transition Frequency                 | $V_{CE} = - 5V, I_C = - 50mA,$<br>$f = 100MHz$ | $f_T$         |      | 150    |       | MHz     |
| Output Capacitance                   | $V_{CB} = - 10V, f = 1MHz$                     | $C_{ob}$      |      | 20     | 30    | pF      |





Note : pulse test: pulse width  $\leq 380\mu S$ , duty cycle  $\leq 2\%$

### Classification Of $h_{FE}$


| Rank  | P        | Q         | R         |
|-------|----------|-----------|-----------|
| Range | 82 - 180 | 120 - 270 | 180 - 390 |



## Electrical Characteristics Curve

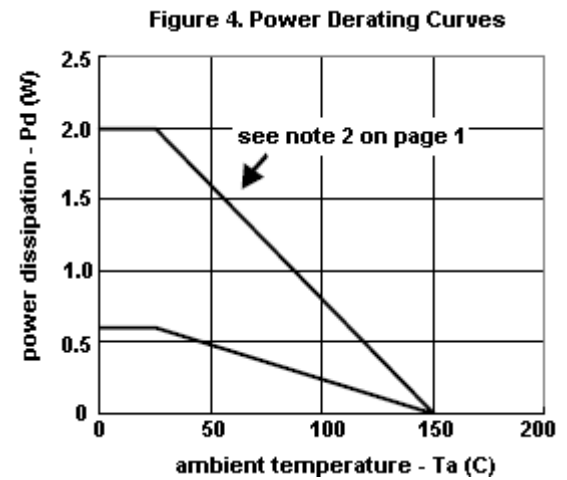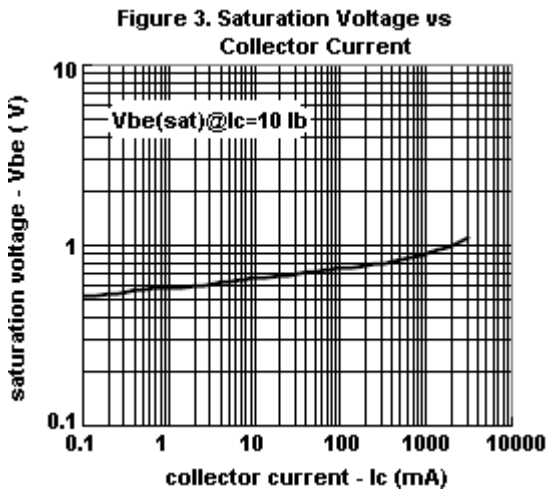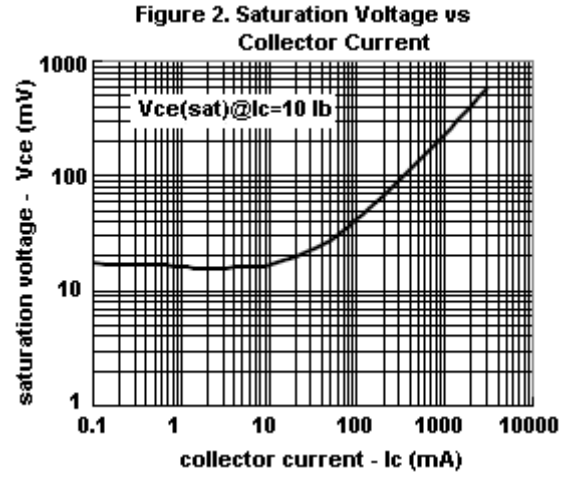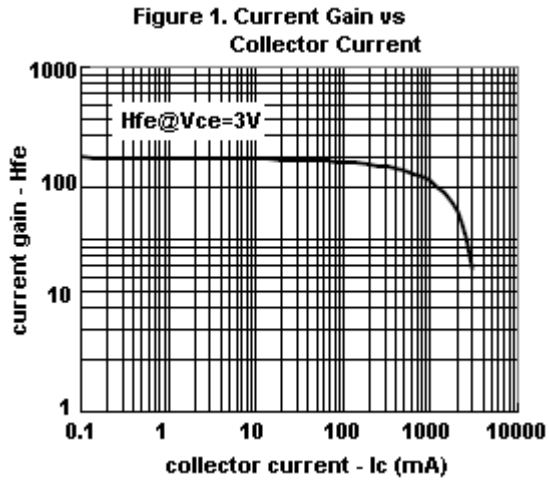

## SOT-89 Mechanical Drawing

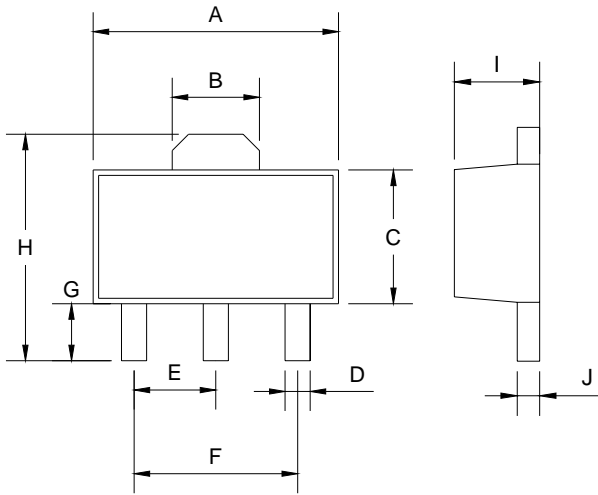

| SOT-89 DIMENSION |             |      |        |       |
|------------------|-------------|------|--------|-------|
| DIM              | MILLIMETERS |      | INCHES |       |
|                  | MIN         | MAX  | MIN    | MAX   |
| A                | 4.40        | 4.60 | 0.173  | 0.181 |
| B                | 1.50        | 1.7  | 0.059  | 0.070 |
| C                | 2.30        | 2.60 | 0.090  | 0.102 |
| D                | 0.40        | 0.52 | 0.016  | 0.020 |
| E                | 1.50        | 1.50 | 0.059  | 0.059 |
| F                | 3.00        | 3.00 | 0.118  | 0.118 |
| G                | 0.89        | 1.20 | 0.035  | 0.047 |
| H                | 4.05        | 4.25 | 0.159  | 0.167 |
| I                | 1.4         | 1.6  | 0.055  | 0.068 |
| J                | 0.35        | 0.44 | 0.014  | 0.017 |
|                  |             |      |        |       |