

XWT SERIES - TRIPLE, 150 WATT

Rev. 11/2000

DESCRIPTION

XWT DC/DC converters are high power, triple output converters that cover a wide range of applications. The XWT features remote sense leads for accurate point of load regulation, and has short circuit and overcurrent protection. For single and dual output high power solutions, see the XWS and XWD series.



TECHNICAL SPECIFICATIONS



Input	
Voltage Range	
12 VDC Nominal	10 - 20 VDC
24 VDC Nominal	18 - 36 VDC
48 VDC Nominal	36 - 72 VDC
Input Ripple Current	20% I_{in} Max.
Reverse Input Current	100% I_{in} Max.

Output	
Setpoint Accuracy	$\pm 1\%$ All Outputs
Line Regulation V_{in} Min. - V_{in} Max., I_{out} Rated	$\pm 1\%$ V_{out} All Outputs
Load Regulation I_{out} Min. - I_{out} Max., V_{in} Nom.	$\pm 1\%$ V_{out} All Outputs
Minimum Output Current	10 % All Outputs
Dynamic Regulation, Loadstep	25% I_{out}
Pk Deviation	4% V_{out}
Settling Time	500 μ s
Voltage Trim Range	$\pm 10\%$
Current Limit Threshold Range, % of I_{out} Rated	110% - 130%

General	
Turn-On Time	10 ms
Remote Shutdown	TTL and CMOS Compatible, Positive Logic
Switching Frequency	200 kHz
Isolation	
Input - Output	500 VDC
Temperature Coefficient	$\pm 0.02\%/{}^{\circ}\text{C}$
Case Temperature	
Operating Range	-25 to +85 ${}^{\circ}\text{C}$ [†]
Storage Range	-40 to +125 ${}^{\circ}\text{C}$
Thermal Shutdown Range	105 to 115 ${}^{\circ}\text{C}$
Humidity Max., Non-Condensing	95%
Vibration, 3 Axes, 5 Min Each	5 g, 10 - 55 Hz
MTBF [†] (Bellcore TR-NWT-000332)	Consult Factory
Safety	Consult Factory
Weight (approx.)	15.4 oz

FEATURES

- High Power Package
- Wide Input Range
- 12, 24, and 48V Input Versions
- Trim and Enable Pin
- Remote Sense Pins
- 500V Isolation

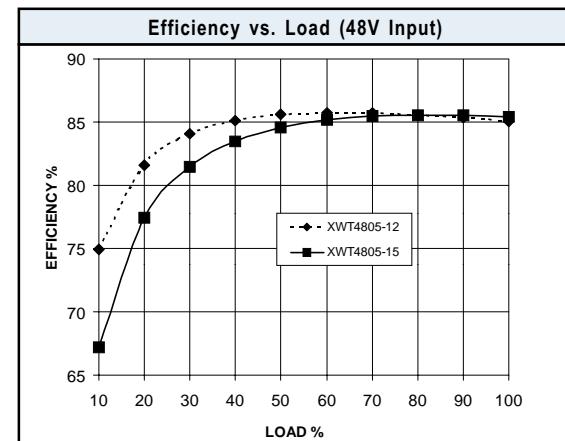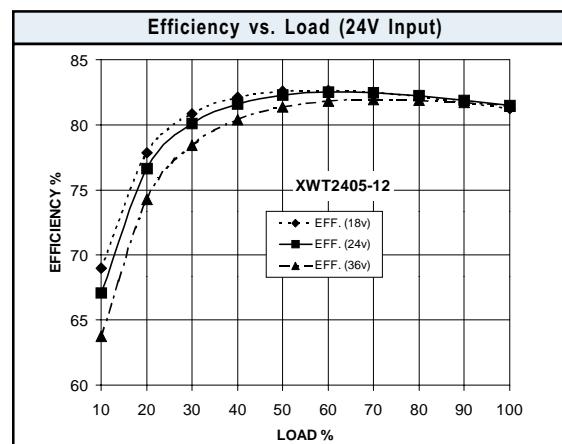

Notes
[†] MTBF predictions may vary slightly from model to model.
Specifications typically at 25 ${}^{\circ}\text{C}$, normal line, and full load, unless otherwise stated.
Soldering Conditions: I/O pins, 260 ${}^{\circ}\text{C}$, ten seconds; fully compatible with commercial wave-soldering equipment.
Safety: Agency approvals may vary from model to model. Please consult factory for specific model information.

XWT SERIES - TRIPLE, 150 WATT


MODELS - (See the last page of this file for options.)

Vin (Volts)	Vin Range (Volts)	Iin Max.* (Amps)	Vout (Volts)	Iout Rated (Amps)	Ripple & Noise Pk-Pk (mV)	Efficiency Typ. **	Model
12	10 - 20	25.0	5, ±12	12, ±3.0	50/120/120	79%	XWT1205-12
12	10 - 20	25.0	5, ±15	12, ±2.5	50/150/150	81%	XWT1205-15
24	18 - 36	13.2	5, ±12	15, ±4.0	50/120/120	83%	XWT2405-12
24	18 - 36	13.2	5, ±15	15, ±3.3	50/150/150	83%	XWT2405-15
48	36 - 72	6.8	5, ±12	15, ±4.0	50/120/120	84%	XWT4805-12
48	36 - 72	8.8	5, ±15	15, ±3.3	50/150/150	85%	XWT4805-15

* Maximum input current at minimum input voltage, maximum rated output power.

** At nominal Vin, rated output.

MECHANICAL DRAWING

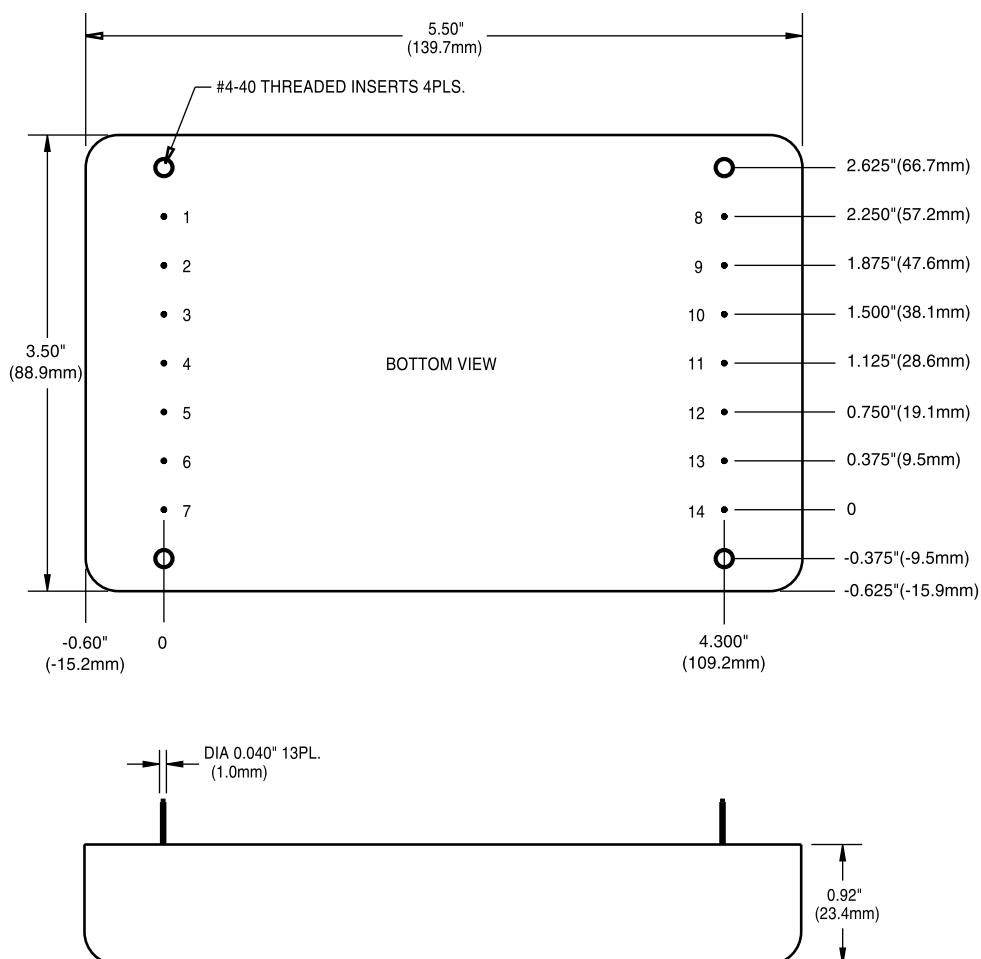

Thermal Impedance	
Natural Convection	2.5 °C/W
100 LFM	2.1 °C/W
200 LFM	1.7 °C/W
300 LFM	1.3 °C/W
400 LFM	1.1 °C/W

Note:
Thermal impedance data is dependent on many environmental factors. The exact thermal performance should be validated for specific application.

Pin	Function
1	No Pin
2	-V _{in}
3	-V _{in}
4	+V _{in}
5	+V _{in}
6	Enable
7	Case
8	- Sense 1
9	-V _{out1}
10	+V _{out1}
11	+ Sense 1
12	- V _{out2}
13	Common 2 & 3
14	+ V _{out3}


Tolerances	
Inches:	(Millimeters)
.XX ± 0.040	.X ± 1.0
.XXX ± 0.010	.XX ± 0.25
Pin:	
± 0.002	± 0.05

(Dimensions as listed unless otherwise specified.)

XWT SERIES - TRIPLE, 150 WATT

TERMINAL STRIP OPTION

MECHANICAL DRAWING

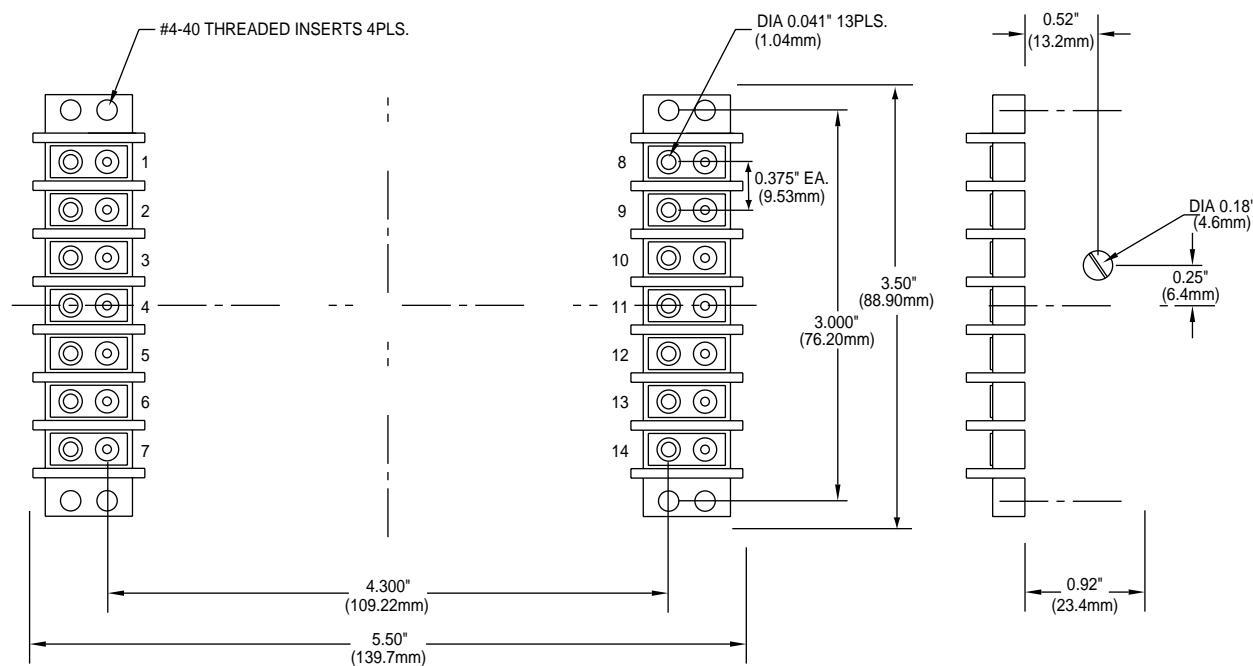

PIN VIEW

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X .030
.XX .040
.XXX .010
FRACTION .030

OPTIONS

When ordering equipment options, use the following suffix information. Select the option(s) that you prefer and add them to the model number. Example ordering options are located below the options table.

OPTION	SUFFIX	APPLICABLE SERIES	REMARKS
Negative Logic	N	HAS, HBD, HBS, HES, LES, QBS, QES, TES, TQD	TTL "Low" Turns Module ON TTL "High" Turns Module OFF
Lucent Compatible Trim	T	HAS, HBD, HBS, HES, QBS, QES	
Terminal Strip	TS	XWS, XWD, XWT	
Trim	1	IAS, LES	
Enable	2	IAD, IAS, LES, SMS	
Trim and Enable	3	IAS, LES	
Current Share	4	SMS	
Headerless	Y	Encapsulated EWS, IWS, OWS	
PIN LENGTH AND HEATSINK OPTIONS			Standard Pin Length is 0.180" (4.6mm)
0.110" (2.8mm) Pin Length	8	All Units (Except SMS)	
0.150" (3.8mm) Pin Length	9	All Units (Except SMS)	
0.24" (6.1mm) Horizontal Heatsink	1H	All Units (Except DIP, SIP, and SM Packages)	Includes Thermal Pad
0.24" (6.1mm) Vertical Heatsink	1V	All Units (Except DIP, SIP, and SM Packages)	Includes Thermal Pad
0.45" (11.4mm) Horizontal Heatsink	2H	All Units (Except DIP, SIP, and SM Packages)	Includes Thermal Pad
0.45" (11.4mm) Vertical Heatsink	2V	All Units (Except DIP, SIP, and SM Packages)	Includes Thermal Pad
0.95" (24.1mm) Horizontal Heatsink	3H	All Units (Except DIP, SIP, and SM Packages)	Includes Thermal Pad
0.95" (24.1mm) Vertical Heatsink	3V	All Units (Except DIP, SIP, and SM Packages)	Includes Thermal Pad

Example Options: HBS050ZG-ANT3V = HBS050ZG-A with negative logic, Lucent compatible trim, and 0.95" vertical heatsink.

LES015YJ-3N = LES015YJ with optional trim and enable, negative logic.

QBS066ZG-AT8 = QBS066ZG-A with Lucent compatible trim and 0.110" pin length.

NUCLEAR AND MEDICAL APPLICATIONS Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the President of Power-One, Inc.

TECHNICAL REVISIONS The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.
