



# DATA SHEET

## SD1020CT~SD10150CT

### SCHOTTKY BARRIER RECTIFIERS


**VOLTAGE** 20 to 150 Volts **CURRENT** 10.0 Amperes **TO-251AB** Unit : inch (mm)

#### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Low power loss, High efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Pb free product are available : 99% Sn above can meet Rohs environment substance directive request

#### MECHANICAL DATA

Case: TO-251AB molded plastic  
 Terminals: Solder plated, solderable per MIL-STD-202G, Method 208  
 Polarity: As marking  
 Weight: 0.015 ounces, 0.4grams.

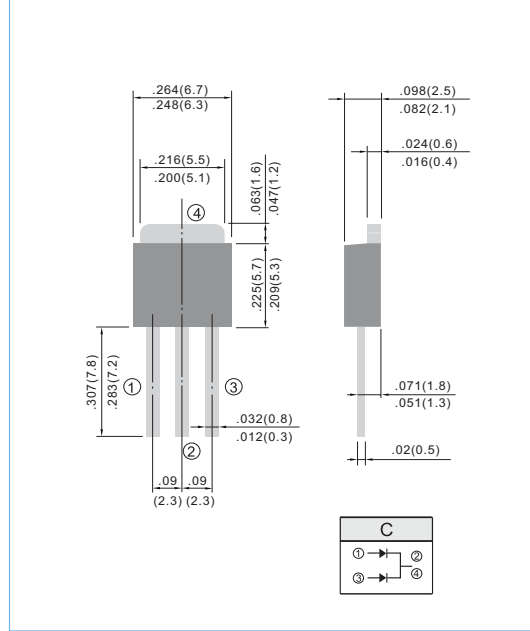

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%


PARAMETER	SYMBOL	SD1020CT	SD1030CT	SD1040CT	SD1050CT	SD1060CT	SD1080CT	SD10100CT	SD10150CT	UNITS	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	150	V	
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	35	42	56	70	105	V	
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	150	V	
Maximum Average Forward Rectified Current .375"(9.5mm) lead length at T <sub>c</sub> =100°C	I <sub>AV</sub>	10.0								A	
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I <sub>FSM</sub>	100								A	
Maximum Instantaneous Forward Voltage at 5.0A per leg	V <sub>F</sub>	0.55		0.75		0.85		0.92		V	
Maximum DC Reverse Current T <sub>A</sub> =25°C at Rated DC Blocking Voltage T <sub>A</sub> =100°C	I <sub>r</sub>					0.2 20					mA
Maximum Thermal Resistance	R <sub>θJC</sub> R <sub>θJA</sub>					3.0 80					°C / W
Operating Junction Temperature Range	T <sub>J</sub>					-50 to +125					°C
Storage Temperature Range	T <sub>STG</sub>					-50 to +150					°C

**NOTES:**


1. Both Bonding and Chip structure are available.




**RATING AND CHARACTERISTIC CURVES**

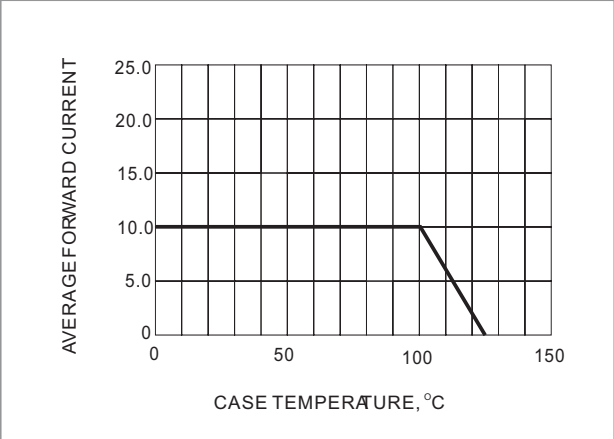


**Fig. 1- FORWARD CURRENT DERATING CURVE**

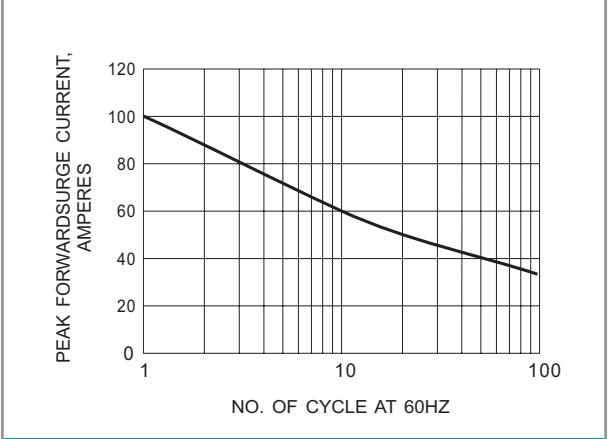

**Fig. 2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

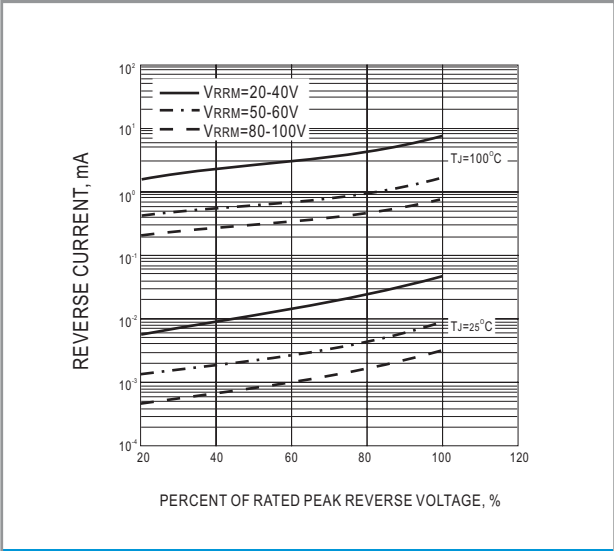

**Fig. 3- TYPICAL REVERSE CHARACTERISTIC**

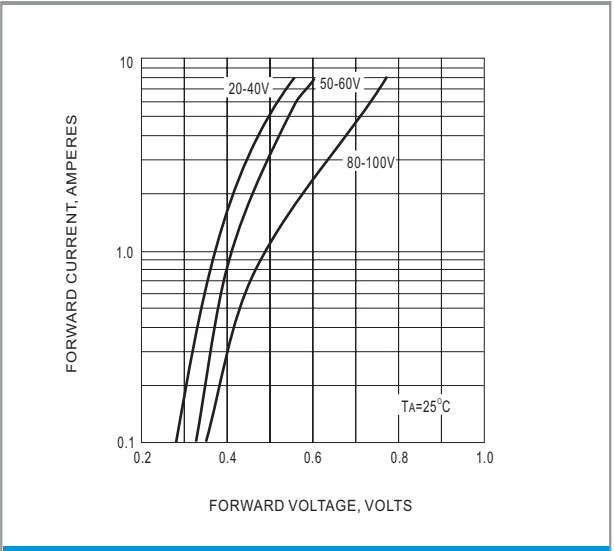

**Fig. 4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC**