



# DATA SHEET

## SD520YS~SD5100YS

### SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

**VOLTAGE** 20 to 100 Volts **CURRENT** 5 Amperes

TO-252 / DPAK

Unit : inch (mm)

#### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Low power loss, High efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications


#### MECHANICAL DATA

Case: TO-252 molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: As marking

Weight: 0.015 ounces, 0.4grams.

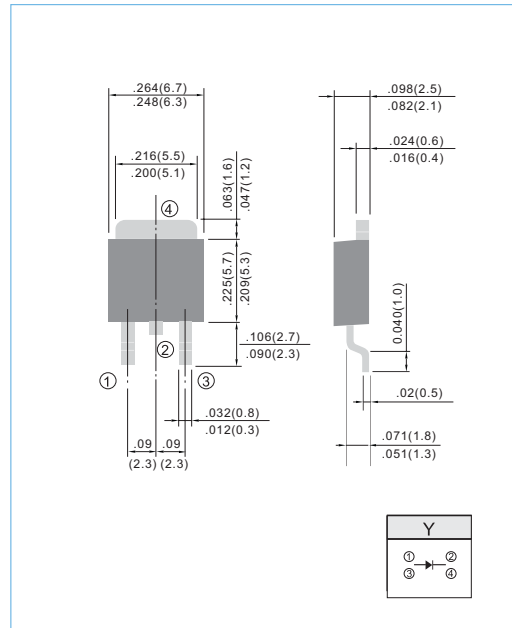

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%


PARAMETER	SYMBOL	SD520YS	SD530YS	SD540YS	SD550YS	SD560YS	SD580YS	SD5100YS	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	V
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current .375"(9.5mm) lead length at $T_c = 75^\circ C$	$I_{AV}$	5.0							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	$I_{FSM}$	100							A
Maximum Forward Voltage at 5.0A	$V_F$	0.55			0.75		0.85		V
Maximum DC Reverse Current $T_c = 25^\circ C$ at Rated DC Blocking Voltage $T_c = 100^\circ C$	$I_R$	0.2 20							mA
Maximum Thermal Resistance	$R_{\theta JC}$	5.0							$^\circ C / W$
Operating Junction Temperature Range	$T_J$	-50 to +125							$^\circ C$
Storage Temperature Range	$T_{STG}$	-65 to +150							$^\circ C$




**RATING AND CHARACTERISTIC CURVES**

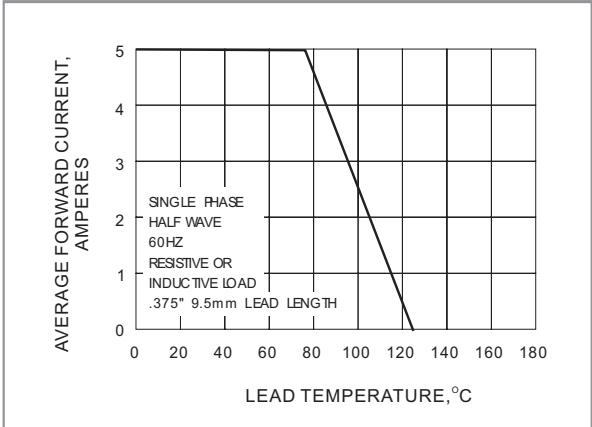


**Fig. 1- FORWARD CURRENT DERATING CURVE**

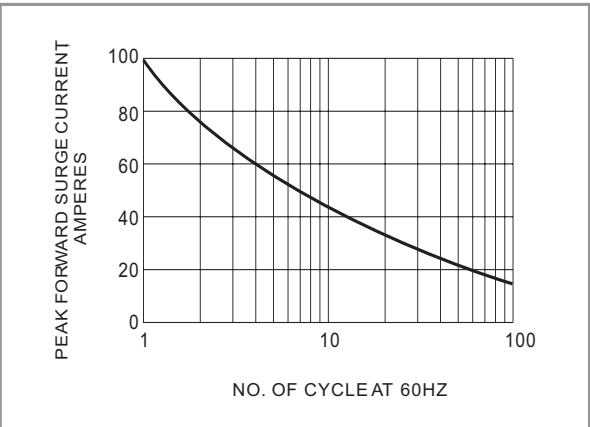

**Fig. 2- MAXIMUM NON - REPETITIVE SURGE CURRENT**

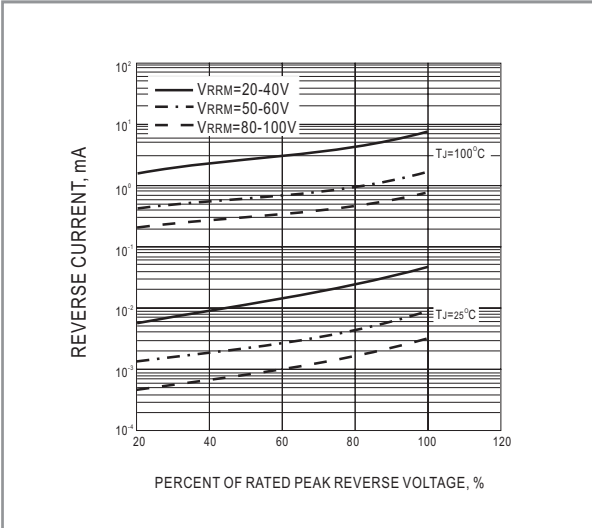

**Fig. 3- TYPICAL REVERSE CHARACTERISTIC**

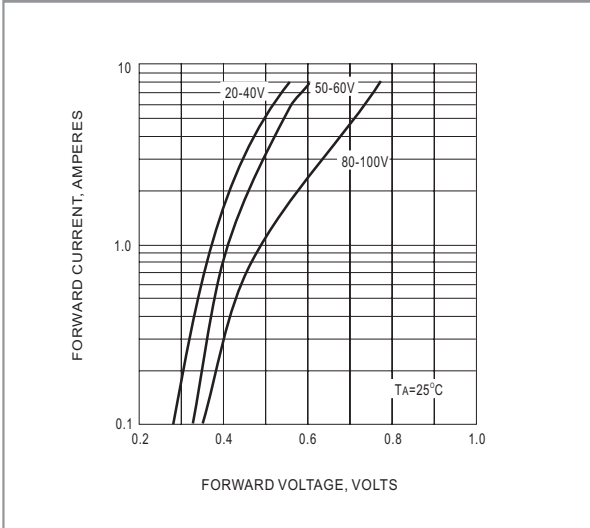

**Fig. 4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC**