


SK35GD126ET

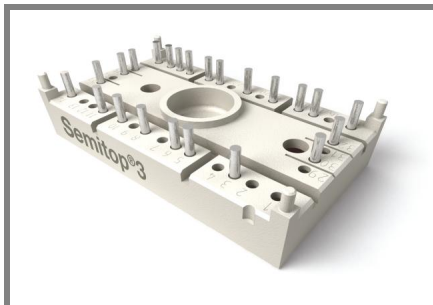

SEMITOP[®] 3

IGBT Module

SK35GD126ET


Preliminary Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- Ultrafast NPT technology IGBT
- CAL technology FWD
- Integrated NTC temperature sensor

Typical Applications

- Inverter

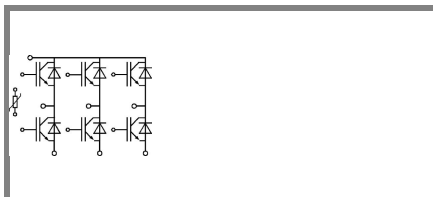


GD-ET

| Absolute Maximum Ratings | | $T_s = 25\text{ °C}$, unless otherwise specified | | | |
|--------------------------|--|---|----|--|-------|
| Symbol | Conditions | Values | | | Units |
| IGBT | | | | | |
| V_{CES} | $T_j = 25\text{ °C}$ | 1200 | | | V |
| I_C | $T_j = 150\text{ °C}$ | $T_s = 25\text{ °C}$ | 40 | | A |
| | | $T_s = 80\text{ °C}$ | 32 | | A |
| I_{CRM} | $I_{CRM} = 2 \times I_{Cnom}$ | 70 | | | A |
| V_{GES} | | ± 20 | | | V |
| t_{psc} | $V_{CC} = 600\text{ V}; V_{GE} \leq 20\text{ V}; T_j = 125\text{ °C}$ $V_{CES} < 1200\text{ V}$ | 10 | | | µs |
| Inverse Diode | | | | | |
| I_F | $T_j = 150\text{ °C}$ | $T_s = 25\text{ °C}$ | 34 | | A |
| | | $T_s = 80\text{ °C}$ | 23 | | A |
| I_{FRM} | $I_{FRM} = 2 \times I_{Fnom}$ | 70 | | | A |
| Module | | | | | |
| $I_{t(RMS)}$ | | | | | A |
| T_{vj} | | -40 ... +150 | | | °C |
| T_{stg} | | -40 ... +125 | | | °C |
| V_{isol} | AC, 1 min. | 2500 | | | V |

| Characteristics | | $T_s = 25\text{ °C}$, unless otherwise specified | | | |
|-----------------|--|---|-------|------|-------|
| Symbol | Conditions | min. | typ. | max. | Units |
| IGBT | | | | | |
| $V_{GE(th)}$ | $V_{GE} = V_{CE}, I_C = 1,5\text{ mA}$ | 5 | 5,8 | 6,5 | V |
| I_{CES} | $V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$ | $T_j = 25\text{ °C}$ | | | mA |
| | | $T_j = 125\text{ °C}$ | | | mA |
| I_{GES} | $V_{CE} = 0\text{ V}, V_{GE} = 20\text{ V}$ | $T_j = 25\text{ °C}$ | 600 | | nA |
| | | $T_j = 125\text{ °C}$ | | | nA |
| V_{CE0} | | $T_j = 25\text{ °C}$ | 1 | 1,2 | V |
| | | $T_j = 125\text{ °C}$ | 0,9 | | V |
| r_{CE} | $V_{GE} = 15\text{ V}$ | $T_j = 25\text{ °C}$ | 20 | 26 | mΩ |
| | | $T_j = 125\text{ °C}$ | 31 | | mΩ |
| $V_{CE(sat)}$ | $I_{Cnom} = 35\text{ A}, V_{GE} = 15\text{ V}$ | $T_j = 25\text{ °C}_{chiplev.}$ | 1,7 | 2,1 | V |
| | | $T_j = 125\text{ °C}_{chiplev.}$ | 2 | | V |
| C_{ies} | $V_{CE} = 25, V_{GE} = 0\text{ V}$ | $f = 1\text{ MHz}$ | 2,5 | | nF |
| C_{oes} | | | 0,132 | | nF |
| C_{res} | | | 0,115 | | nF |
| $t_{d(on)}$ | $R_{Gon} = 15\text{ Ω}$ | $V_{CC} = 600\text{ V}$ $I_{Cnom} = 35\text{ A}$ | 85 | | ns |
| t_r | | | 30 | | ns |
| E_{on} | $R_{Goff} = 15\text{ Ω}$ | $T_j = 125\text{ °C}$ $V_{GE} = \pm 15\text{ V}$ | 4,6 | | mJ |
| $t_{d(off)}$ | | | 430 | | ns |
| t_f | | | 90 | | ns |
| E_{off} | | | 4,3 | | mJ |
| $R_{th(j-s)}$ | per IGBT | 1,05 | | | K/W |

SK35GD126ET

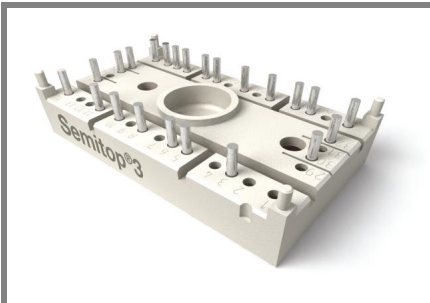

SEMITOP® 3

IGBT Module

SK35GD126ET


Preliminary Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- Ultrafast NPT technology IGBT
- CAL technology FWD
- Integrated NTC temperature sensor

Typical Applications

- Inverter

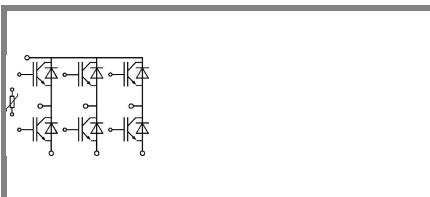





GD-ET




Characteristics


| Symbol | Conditions | min. | typ. | max. | Units |
|---------------------------|--|------|---|------|---------------|
| Inverse Diode | | | | | |
| $V_F = V_{EC}$ | $I_{Fnom} = 35 \text{ A}; V_{GE} = 0 \text{ V}$ | | | | |
| | | | $T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$ | 1,8 | 2,1 |
| | | | $T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$ | 1,8 | |
| V_{F0} | | | $T_j = 25 \text{ }^\circ\text{C}$ | 1 | 1,1 |
| | | | $T_j = 125 \text{ }^\circ\text{C}$ | 0,8 | |
| r_F | | | $T_j = 25 \text{ }^\circ\text{C}$ | 23 | 29 |
| | | | $T_j = 125 \text{ }^\circ\text{C}$ | 31 | |
| I_{RRM} | $I_{Fnom} = 35 \text{ A}$ | | $T_j = 125 \text{ }^\circ\text{C}$ | 43 | A |
| Q_{rr} | $di/dt = -1330 \text{ A}/\mu\text{s}$ | | | 7 | μC |
| E_{rr} | $V_{CC} = 600\text{V}$ | | | 2,9 | mJ |
| $R_{th(j-s)D}$ | per diode | | | 1,7 | K/W |
| M_s | to heat sink | 2,25 | | 2,5 | Nm |
| w | | | 30 | | g |
| Temperature sensor | | | | | |
| R_{100} | $T_s = 100^\circ\text{C} (R_{25} = 5\text{k}\Omega)$ | | 493 \pm 5% | | Ω |

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.


This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

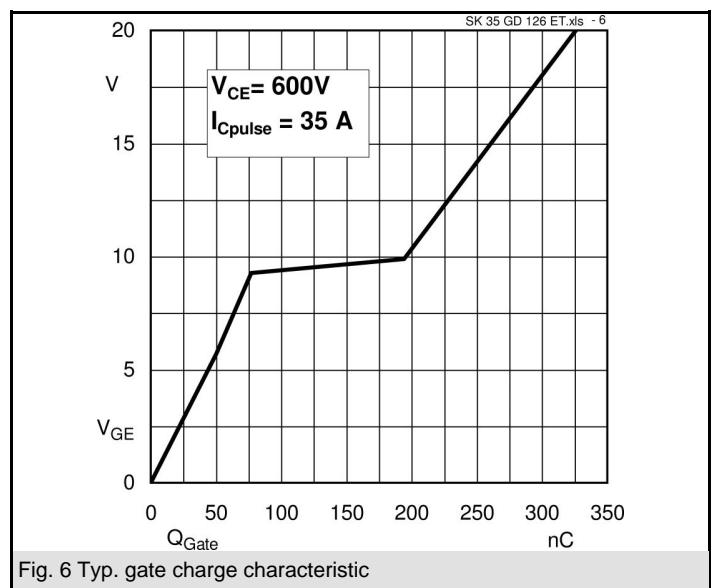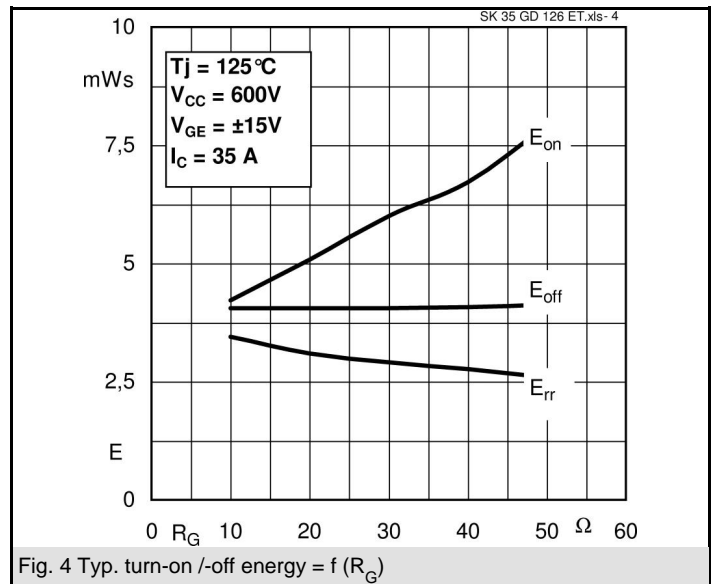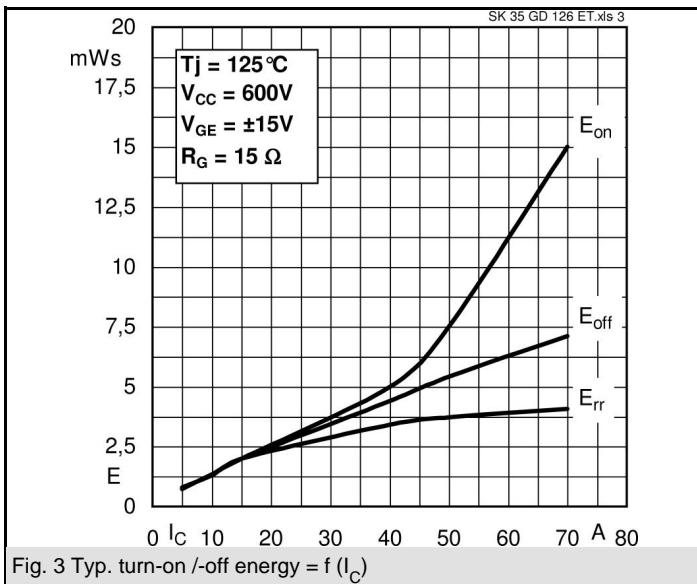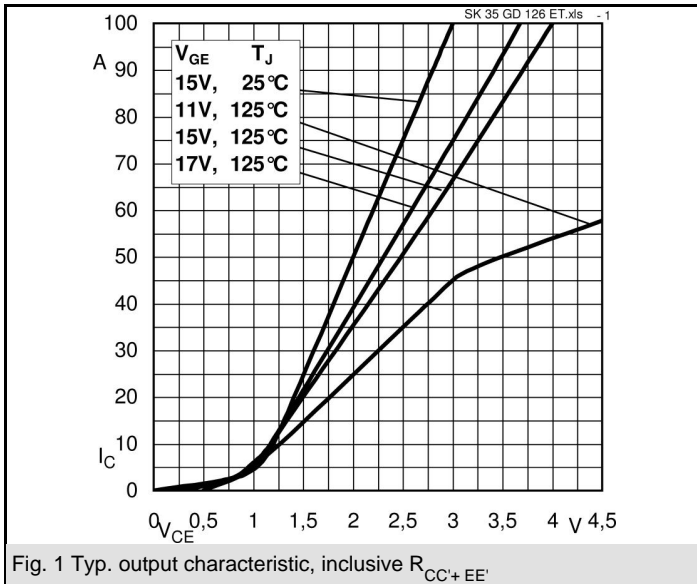

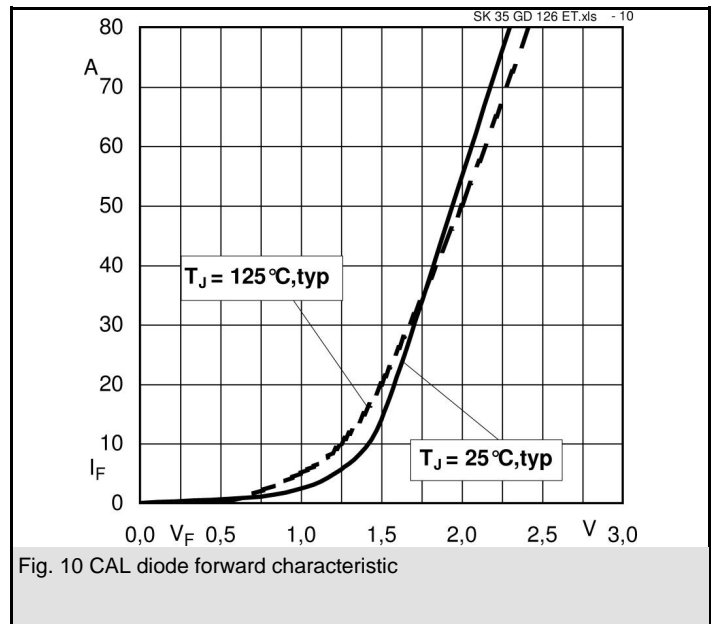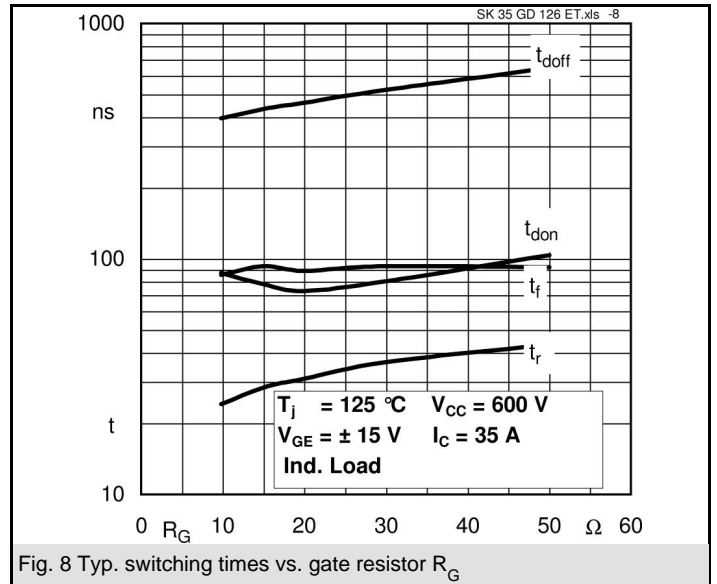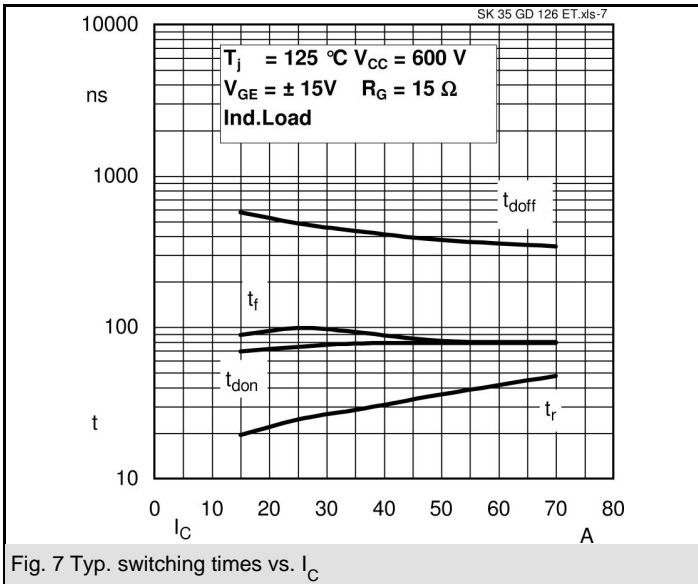

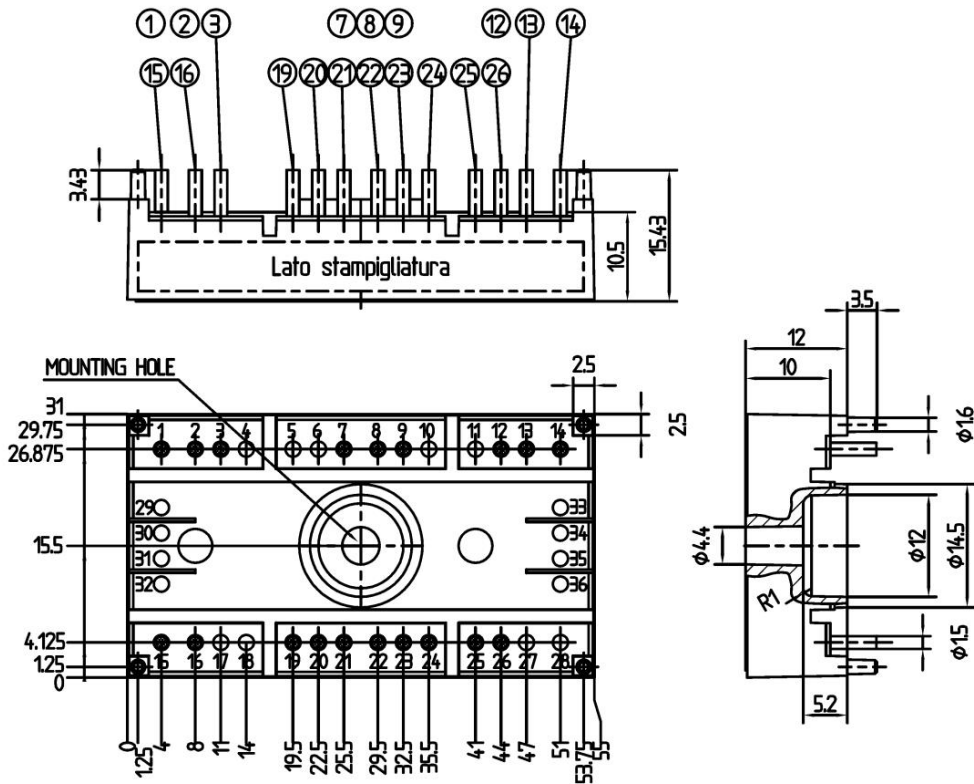

Case T52 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)

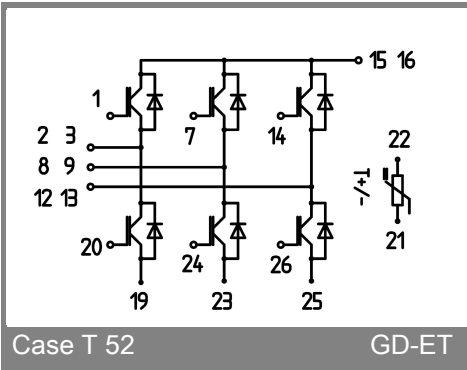

Case T 52

GD-ET