

FESTOON LED BULB

Data Sheet

6mm LED Bulb Series

AB-06XXXX-XXXX-XX

Description:

These high voltage LED bulbs are specifically designed for electric equipment, indicator light switch and where a wide view angle.

The 5mm round shaped radiation pattern (40°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

Selection guide:

AB-06XXXX-XXXX-XX

AB:A-BRIGHT product

5:Round type dimensions

X: Color

XXXV: Input voltage

X: Bulb Base

Feature:

- Wide view angle (40°)
- High luminous output
- Seven kind color
- Free to differentiate anode and cathode(Bi-Polar)
- Solid-state Vibration resistant
- Saving power
- Long life

Option:

- 4V to 12V DC
- Other industry standard base


A-BRIGHT

A-BRIGHT INDUSTRIAL CO.,LTD.

Part No.: AB-0651SW0-12VD-CF-B

6 Lamps LED Bulb

PACKAGE DIMENSIONS:

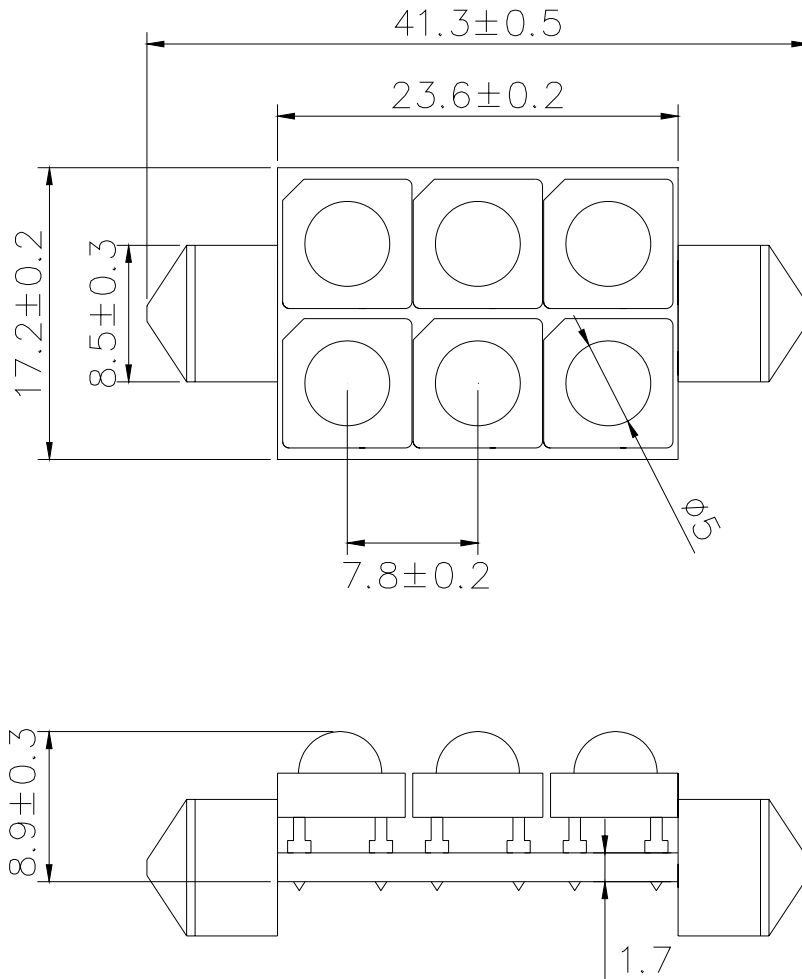

NOTE:

- 1. All dimensions are in millimeter.
- 2. All tolerance are ± 0.25 mm.

Part No.: AB-0651SW0-12VD-CF-B

6 Lamps LED Bulb

FEATURE:

- SUPER LUMINOSITY SUNSET WHITE LED (InGaN).
- WATER CLEAR PACKAGE.
- 5mm ALL RESIN MOLD.
- WIDE VIEWING ANGLE.
- ELECTRIC DC.

MATERIALS:

- LED LENS: UV RESISTENT EPOXY

ABSOLUTE MAXIMUM RATING: Ta = 25 °C

- PEAK OPERATE VOLTAGE..... 14 V
- OPERATING TEMPERATURE..... -25 TO +85°C
- STORAGE TEMPERATURE..... -35 TO +100°C
- LED BULB LIFE..... 20000 HOURS
(LUMINANCE REDUCES to 50%)

ABSOLUTE OPTICAL CHARACTERISTIC Ta= 25°C

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Power dissipation	PO	----	0.5	----	W
Operate Voltage	V	----	12	14	V
Luminous Flux	V _{IN} = 12V DC LM	----	8	----	LM
Chromaticity Coordinates	V _{IN} = 12V DC X	----	0.45	----	----
	Y	----	0.41	----	
Forward Current	V _{IN} = 12V DC IF	----	35	----	mA
Viewing Angle	2θ1/2	----	40	----	deg