


# Type: CPFC11D60

### **◆ Product Description**


- 12.8 $\times$ 11.7mm Max.(L $\times$ W), 6.5mm Max. Height .
- · Custom design is available.




#### ◆ Feature

- For medical machines and automotive related applications.
- · Of high reliabilities.
- · RoHS Compliance


## **♦** Dimensions (mm)

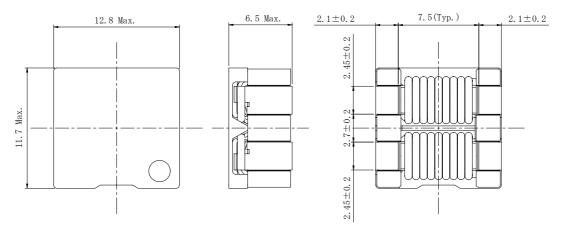

#### ◆ Land Pattern (mm)



# ◆ Schematics (Bottom)



#### Specification

Part Name.	Stamp	Impedance (1,2-3,4) 100MHz	D.C.R (1-4) and (2-3)	Rated Current (1-2) ※1 (3-4)short
CPFC11D60-100M08	122	800Ω Min	8.0mΩ Max.	6.0A

 $\times$ 1. Rated Current: The DC current at which the temperature rise is  $\triangle t = 40^{\circ}\text{C}$ . (Ta=20°C)