


Type: ETD2924

◆ **Product Description**


- 36.5×36.5mm Max.(L×W), 26.0mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.




◆ **Feature**

- Max. Operating frequency 500kHz, Max. Operating Power 60.0W (500kHz).
- Ideally used in Switching power supply etc.
- RoHS Compliance

◆ **Dimensions (mm)**

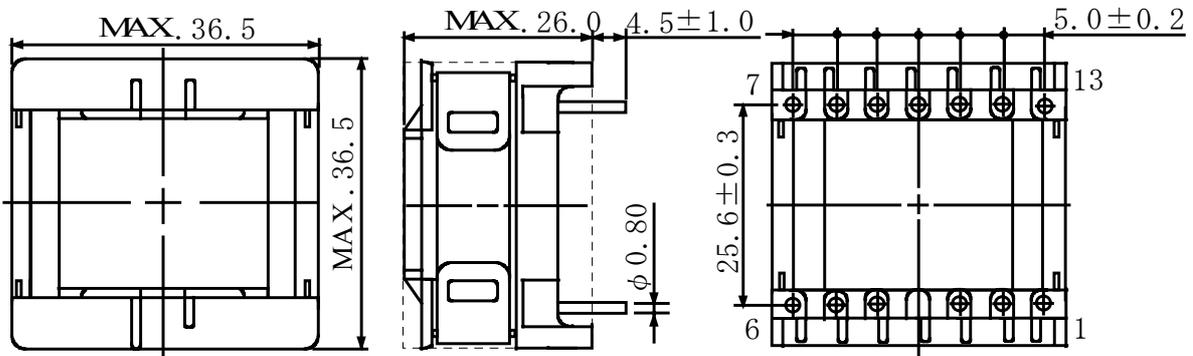

◆ **Schematics (Bottom)**

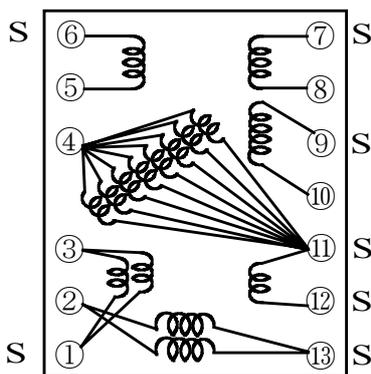

“S” is winding start.

◆ **Specification**

Sample No.	Inductance (13-12) 1kHz/1V	Leakage Inductance (13-12) 1kHz/1V	Hi-pot Winding-winding (50/60Hz)
3307-T050	2.7mH ± 15%	43μH (REF).	AC 1500Vrms/1sec.