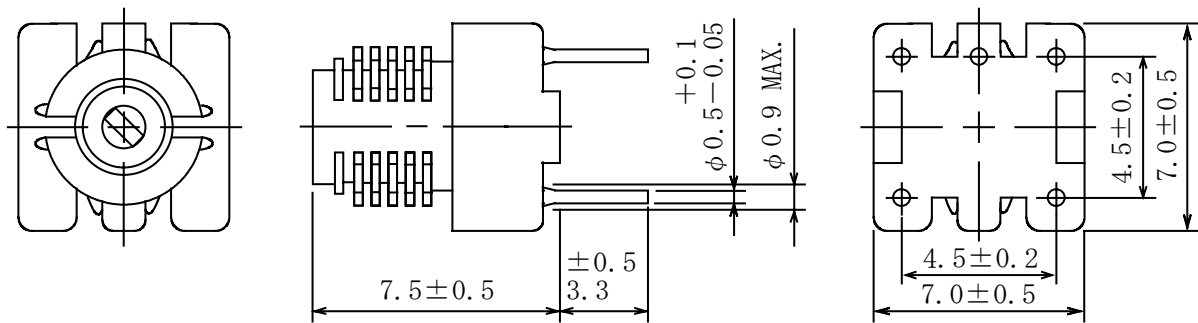


**Type: S-7LBFN**
**◆ Product Description**


- 7.5×7.5mm Max.(L×W), 8.0mm Max. Height.
- Inductance:0.1~10 μ H Max.
- Operating frequency: 300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements

**◆ Feature**

- Variable unshielded type.
- RoHS Compliance

**◆ Dimensions (mm)**


- \* Dimension does not include solder used on coil.
- \* Pin pitch should be measured at the root of terminal.

**◆ Connection (Bottom View)**


“S” is winding start.

**◆ Specification (Part No.S7010477)**

Item	(1-3)	Measuring Condition
Tuning Capacity	29.5pF±4% Variable	100MHz
Unloaded Qu	65 Min.	100MHz