


# DUAL HIGH POWER DIRECTIONAL COUPLERS


## COAXIAL CONNECTOR

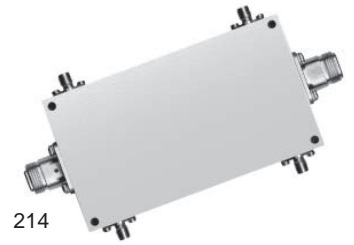

214

COUPLING (dB)	FREQUENCY RANGE LF-HF	COUPLING FLATNESS	MAINLINE LOSS (dB)	DIRECTIVITY (dB)	INPUT POWER	VSWR TYP	IMPEDANCE	PACKAGE	MODEL
NOM.	(MHz)	(dB)	MAX.	MIN.	MAX.		(OHMS)		
30.0 ± 0.75	850 - 960	± 0.25	0.2	30	500	1.15:1	50	214	KEK-704DH

For pin location and package outline drawings, see back pages.

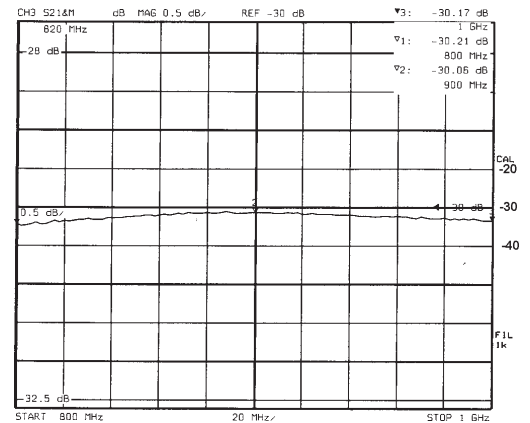

KEK-704DH (COUPLING)