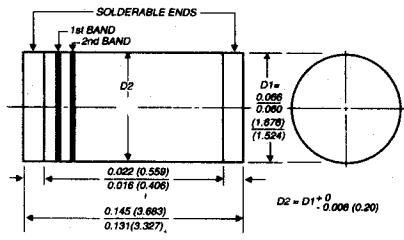


## Description



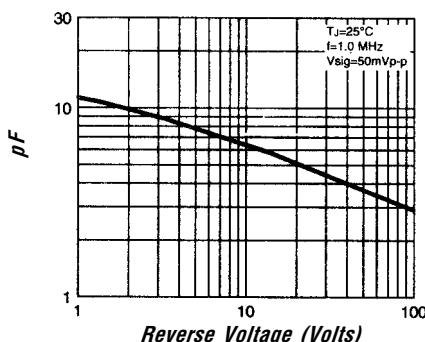
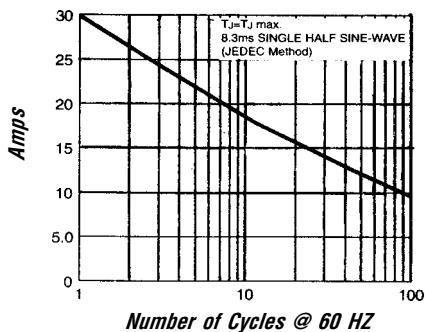
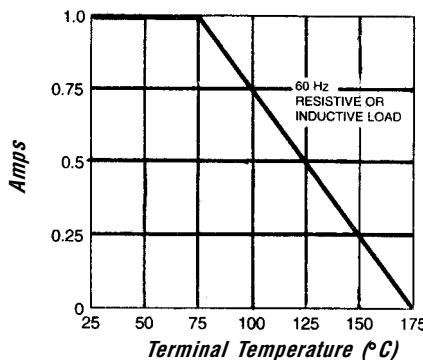
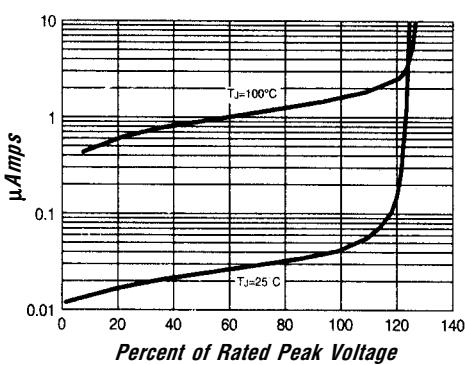
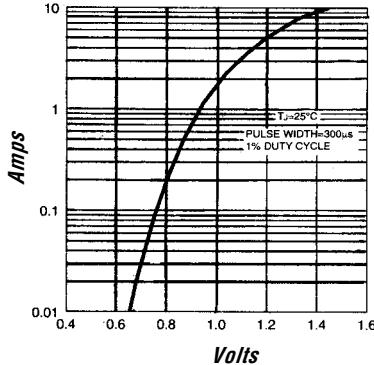
## Mechanical Dimensions



## Features

- **HIGH TEMPERATURE METALLURGICALLY BONDED CONSTRUCTION**
- **SINTERED GLASS CAVITY-FREE JUNCTION**
- **1.0 AMP OPERATION @ T<sub>A</sub> = 55°C, WITH NO THERMAL RUNAWAY**
- **TYPICAL I<sub>R</sub> < 0.1 μAmp**

Electrical Characteristics @ 25°C.	GL41A . . . 41M Series							Units
<b>Maximum Ratings</b>	GL41A	GL41B	GL41D	GL41G	GL41J	GL41K	GL41M	
Peak Repetitive Reverse Voltage...V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
RMS Reverse Voltage...V <sub>R(rms)</sub>	35	70	140	280	420	560	700	Volts
DC Blocking Voltage...V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Average Forward Rectified Current...I <sub>F(av)</sub> Current 3/8" Lead Length @ T <sub>A</sub> = 75°C	.....	.....	.....	1.0	.....	.....	.....	Amps
Non-Repetitive Peak Forward Surge Current...I <sub>FSM</sub> ½ Sine Wave Superimposed on Rated Load	.....	.....	.....	30	.....	.....	.....	Amps
Forward Voltage @ 1.0A...V <sub>F</sub>	< .....	1.1	.....	> < ....	1.2	.... >	.....	Volts
Full Load Reverse Current...I <sub>R(av)</sub> Full Cycle Average @ T <sub>A</sub> = 75°C	.....	.....	.....	30	.....	.....	.....	μAmps
DC Reverse Current...I <sub>R</sub> @ Rated DC Blocking Voltage	T <sub>A</sub> = 25°C	.....	.....	5.0	.....	.....	.....	μAmps
	T <sub>A</sub> = 125°C	.....	.....	50	.....	.....	.....	μAmps
Typical Junction Capacitance...C <sub>J</sub> (Note 1)	.....	.....	.....	8.0	.....	.....	.....	pF
Typical Thermal Resistance...R <sub>θJC</sub> (Note 2)	.....	.....	.....	7.5	.....	.....	.....	°C/W
Operating & Storage Temperature Range...T <sub>J</sub> , T <sub>STRG</sub>	.....	.....	.....	-65 to 175	.....	.....	.....	°C
Polarity Color Band (2nd Band)	Gray	Red	Orange	Yellow	Green	Blue	Violet	

**Typical Junction Capacitance**

**Non-Repetitive Peak Forward Surge Current**

**Forward Current Derating Curve**

**Typical Reverse Characteristics**

**Typical Instantaneous Forward Characteristics**


Ratings at  
25 Deg. C ambient  
temperature  
unless otherwise  
specified.

Single Phase Half  
Wave, 60 HZ  
Resistive or  
Inductive Load.

For Capacitive  
Load, Derate  
Current by 20%.

- NOTES:**
1. Measured @ 1 MHZ and applied reverse voltage of 4.0V.
  2. Thermal Resistance from Junction to Ambient, 6.0mm<sup>2</sup> copper pad to each terminal.