

# UF100GS THRU UF108GS

## GLASS PASSIVATED JUNCTION ULTRAFAST SWITCHING RECTIFIER VOLTAGE - 50 to 800 Volts CURRENT - 1.0 Ampere

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound
- Glass passivated junction in A-405 package
- 1.0 ampere operation at  $T_A=55\text{ }^{\circ}\text{C}$  with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- Ultra Fast switching for high efficiency

### MECHANICAL DATA


Case: Molded plastic, A-405

Terminals: axial leads, solderable per MIL-STD-202, Method 208

Polarity: Band denotes cathode

Mounting Position: Any

Weight: 0.008 ounce, 0.22 gram

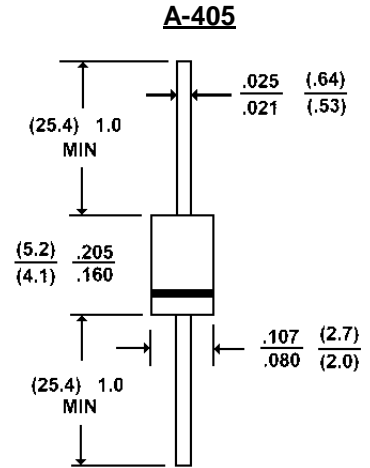

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at  $25\text{ }^{\circ}\text{C}$  ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

	UF100GS	UF101GS	UF102GS	UF104GS	UF106GS	UF108GS	UNITS
Peak Reverse Voltage, Repetitive; $V_{RM}$ :	50	100	200	400	600	800	V
Maximum RMS Voltage	35	70	140	280	420	560	V
DC Reverse Voltage; $V_R$	50	100	200	400	600	800	V
Average Forward Current, $I_o$ @ $T_A=55\text{ }^{\circ}\text{C}$ 3/8" lead length, 60 Hz, resistive or inductive load	1.0						A
Peak Forward Surge Current, $I_{FM}$ (surge) 8.3msec. single half sine wave superimposed on rated load(JECEC method)	30						A
Maximum Forward Voltage $V_F$ @ 1.0A, $25\text{ }^{\circ}\text{C}$	1.00		1.30		1.70		V
Maximum Reverse Current, @ Rated $T_J=25\text{ }^{\circ}\text{C}$	10.0						$\mu\text{g A}$
Reverse Voltage $T_J=100\text{ }^{\circ}\text{C}$	150						$\mu\text{g A}$
Typical Junction capacitance (Note 1)	17						pF
Typical Junction Resistance (Note 2) $R_{\theta JKJA}$	60.0						$^{\circ}\text{C/W}$
Reverse Recovery Time $I_F=.5A, I_R=1A, I_{tr}=.25A$	50	50	50	50	100	100	ns
Operating and Storage Temperature Range	-55 to +150						$^{\circ}\text{C}$

### NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
2. Thermal resistance from junction to ambient and from junction to lead length 0.375"(9.5mm) P.C.B. mounted

# RATING AND CHARACTERISTIC CURVES

## UF100GS THRU UF108GS

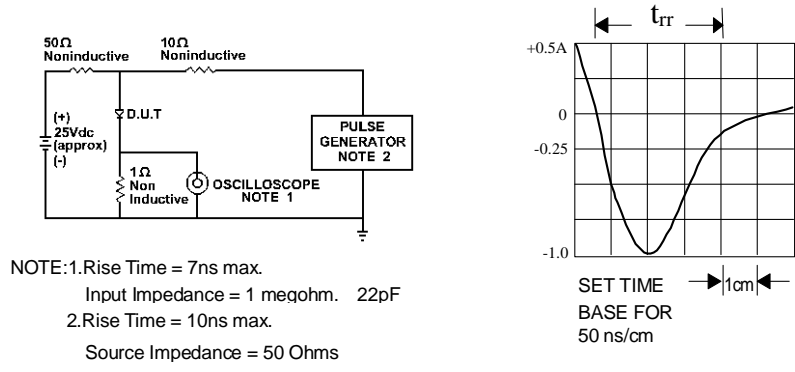


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

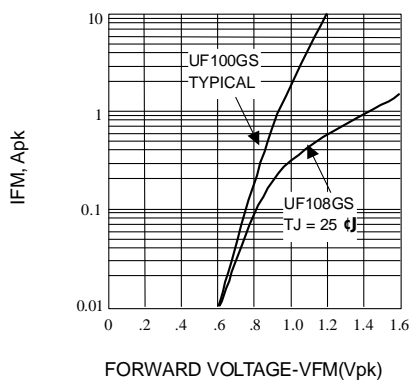


Fig. 2-FORWARD CHARACTERISTICS

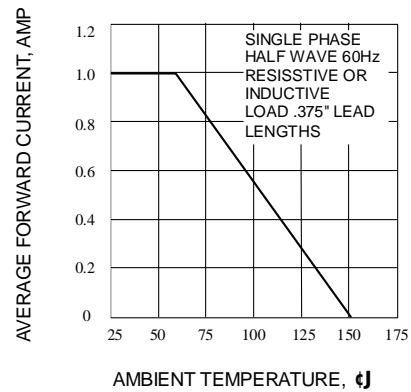


Fig. 3-FORWARD CURRENT DERATING CURVE

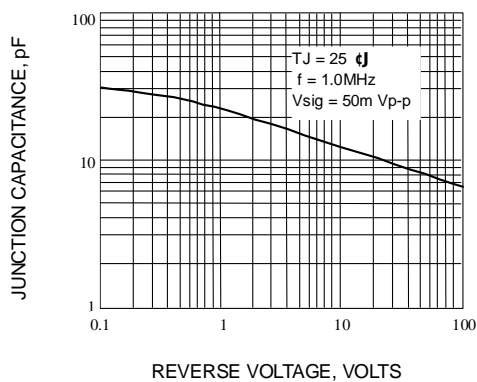


Fig. 4-TYPICAL JUNCTION CAPACITANCE

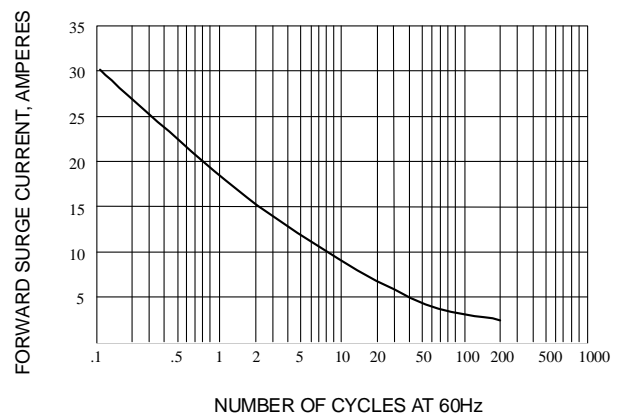


Fig. 5-PEAK FORWARD SURGE CURRENT