


Surface Mount SOIC Resistor Networks

SOIC Series

- Tested for COTS applications
- Both narrow and wide body versions available
- Standard JEDEC 8, 14, 16, and 20 pin packages
- Ultra-stable TaNSi[®] resistors on silicon substrates
- Standard Sn/Pb and Pb-free terminations available

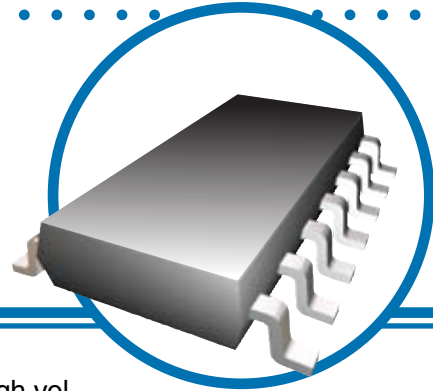

IRC's TaNSi[®] SOIC resistor networks are the perfect solution for high volume applications that demand a small wiring board footprint. The .050" lead spacing provides higher lead density, increased component count, lower resistor cost, and high reliability.

The tantalum nitride film system on silicon provides precision tolerance, exceptional TCR tracking, low cost and miniature package. Excellent performance in harsh, humid environments is a trademark of IRC's self-passivating TaNSi[®] resistor film.

The SOIC series is ideally suited for the latest surface mount assembly techniques and each lead can be 100% visually inspected. The compliant gull wing leads relieve thermal expansion and contraction stresses created by soldering and temperature excursions.

For applications requiring high performance resistor networks in a low cost, surface mount package, specify IRC SOIC resistor networks.

Electrical Data

Resistance Range	10 – 250K Ω
Absolute Tolerance	To $\pm 0.1\%$
Ratio Tolerance to R1	To $\pm 0.05\%$
Absolute TCR	To $\pm 25\text{ppm}/^\circ\text{C}$
Tracking TCR	To $\pm 5\text{ppm}/^\circ\text{C}$
Element Power Rating @ 70°C Isolated Schematic Bussed Schematic	100mW 50mW
Power Rating @ 70°C SOIC-N Package	8-Pin 400mW 14-Pin 700mW 16-Pin 800mW
Power Rating @ 70°C SOIC-W Package	16-Pin 1.2W 20-Pin 1.5W
Rated Operating Voltage (not to exceed $\sqrt{\text{Power} \times \text{Resistance}}$)	100 Volts
Operating Temperature	-55°C to $\pm 125^\circ\text{C}$
Noise	<-30dB

Environmental Data

Test Per MIL-PRF-83401	Typical Delta R	Max Delta R
Thermal Shock	$\pm 0.02\%$	$\pm 0.1\%$
Power Conditioning	$\pm 0.03\%$	$\pm 0.1\%$
High Temperature Exposure	$\pm 0.03\%$	$\pm 0.05\%$
Short-time Overload	$\pm 0.02\%$	$\pm 0.05\%$
Low Temperature Storage	$\pm 0.03\%$	$\pm 0.05\%$
Life	$\pm 0.05\%$	$\pm 0.1\%$

General Note

Welwyn Components reserves the right to make changes in product specification without notice or liability. All information is subject to Welwyn's own data and is considered accurate at time of going to print.

© Welwyn Components Limited Bedlington, Northumberland NE22 7AA, UK
Telephone: +44 (0) 1670 822181 • Facsimile: +44 (0) 1670 829465 • Email: info@welwyn-tt.com • Website: www.welwyn-tt.com

Surface Mount SOIC Resistor Networks

Manufacturing Capability Data

Absolute TCR (ppm/°C)	ISOLATED SCHEMATIC A				BUSSED SCHEMATIC B			
	Ohmic Range (Ω)	Available Tolerances	Available Ratio Tolerances	Best TCR Tracking (±ppm/°C)	Ohmic Range (Ω)	Available Tolerances	Available Ratio Tolerances	Best TCR Tracking (ppm/°C)
250	10 - 25	FGJ	FG	50	10 - 25	FGJ	FG	200
	26 - 50	DFGJ	CDFG	10	26 - 50	FGJ	DFG	100
	51 - 200	CDFGJ	CDFG	5	51 - 100	DFGJ	CDFG	50
	201 - 250K	BCDFGJ	ABCDG	5	101 - 200	DFGJ	BCDFG	25
					201 - 500	BCDFGJ	BCDFG	20
					501 - 100K	BCDFGJ	ABCDG	5
100	26 - 50	DFGJ	CDFG	10	26 - 50	FGJ	DFG	100
	51 - 200	CDFGJ	CDFG	5	51 - 100	DFGJ	CDFG	50
	201 - 250K	BCDFGJ	ABFG	5	101 - 200	DFGJ	BCDFG	25
					201 - 500	BCDFGJ	BCDFG	20
					501 - 100K	BCDFGJ	ABCDG	5
50	26 - 50	DFGJ	CDFG	10	51 - 100	DFGJ	CDFG	50
	51 - 200	CDFGJ	CDFG	5	101 - 200	DFGJ	BCDFG	25
	201 - 250K	BCDFGJ	ABFG	5	201 - 500	BCDFGJ	BCDFG	20
					501 - 100K	BCDFGJ	ABCDG	5
25	51 - 200	CDFGJ	CDFG	5	201 - 500	BCDFGJ	BCDFG	20
	201 - 250K	BCDFGJ	ABFG	5	501 - 100K	BCDFGJ	ABCDG	5

Surface Mount SOIC Resistor Networks


Physical and Schematic Data (mm)

Note: All dimensions exclude mold flash and end flash which shall not exceed 0.15 per side.

	SOIC-N			SOIC-W	
	8-Pin	14-Pin	16-Pin	16-Pin	20-Pin
L	4.9 ± 0.1	8.66 ± 0.1	9.91 ± 0.1	10.21 ± 0.1	12.75 ± 0.1
E	6.0 ± 0.2			10.3 ± 0.3	
B	3.9 ± 0.1			7.5 ± 0.1	
H	1.5 ± 0.2			2.5 ± 0.15	

Note: N = number of pins (8, 14, 16)

Power Derating Data

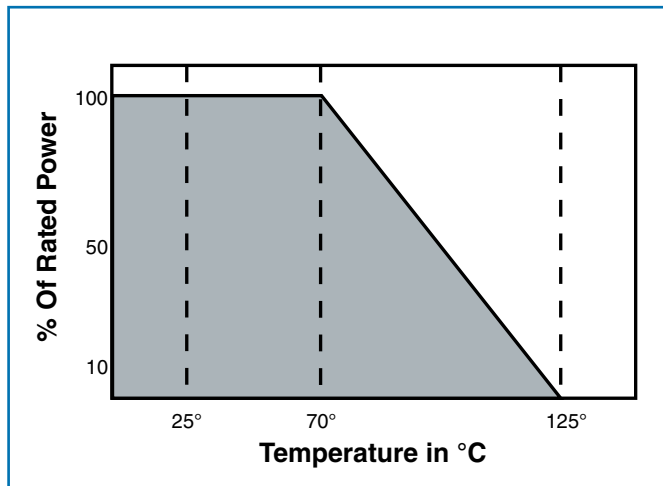

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

Ordering Data

SS8 - A - 01 - 10K - F B

Style
 SS4 = 8-pin SOIC-N
 SS7 = 14-pin SOIC-N
 SS8 = 16-pin SOIC-N
 SL8 = 16-pin SOIC-W
 SL0 = 20-pin SOIC-W

Schematic
 A = Isolated network
 B = Bussed network

Absolute TCR Code
 00 = ±250ppm/°C; 01 = ±100ppm/°C
 02 = ±50ppm/°C; 03 = ±25ppm/°C

Resistance Code
 4-Digit Resistance Code
 Ex: 1002 = 10KΩ, 50R1 = 50.1Ω

Absolute Tolerance Code
 J = ±5%; G = ±2%; F = ±1%; D = ±0.5%
 C = ±0.25%; B = ±0.1%

Optional Ratio Tolerance Code
 G = ±2%; F = ±1%; D = ±0.5%;
 C = ±0.25%; B = ±0.1%; A = ±0.05%

Packaging
 Specify tubes or tape & reel.

Finish
 Blank = Pb - free
 PB = SnPb