

## Remote Weight Display



### FEATURES

- Large 6 digit Red LED display
- Digit height - 57mm
- Digit-for-digit replication from the transmitting VT indicator
- Communication interface - RS-232, RS-485, or 20mA
- Baud rate and data format - DIP switch selectable
- Compatible with all VT indicators
- Environmental protection to IP65

### DESCRIPTION

Vishay Transducers' RD10 is a compact, digit-for-digit, high visibility remote display.

The large LED display (57mm digits) and wide viewing angle contribute to ease of reading at long distances.


The VTRD10 is environmentally protected to IP65 and is suitable for outdoor use.

A standard serial interface (RS-232 or RS-485 or 20mA current loop) allows easy connection between the local indicator and the VTRD10 at distances up to 600 meters (RS-485). The VTRD10 is fully compatible with VT Weight Indicator models 50, 100, 200, 300, 400 and 500.

### APPLICATIONS

- Truck scales/ Weighbridges
- Warehouse scales
- Loading bays
- All outdoor weighing applications

### CONFIGURATION

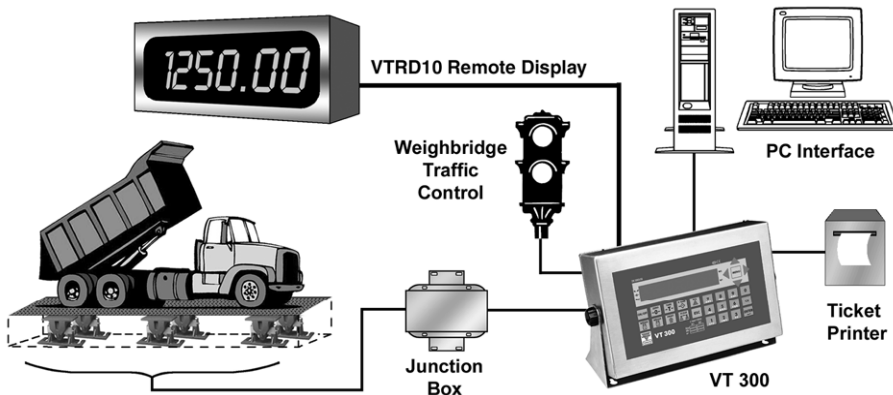

### OPTIONS

- UL/TUV/UK/China/Japan plug



**SPECIFICATIONS**

**DISPLAY AND SERIAL INTERFACE**

Display: 6 digits, LED, high visibility (57mm, red)  
Serial Interface: RS-232 or RS-485 or 20mA current loop, terminated with screw type terminals  
Baud Rate: DIP switch selectable 1200, 2400, 9600, 19200 baud  
Character Format: DIP switch selectable:  
a) 7 data bits, even parity, 1 stop bit  
b) 8 data bits, no parity, 1 stop bit  
c) 8 data bits, even parity, 1 stop bit  
Distance: RS-232 and 20mA current loop = 50 meters  
RS-485 = 600 meters

**ELECTRICAL**

Voltage: 230VAC+10%, 50-60Hz  
Power: 7W max.

**ENCLOSURE**

Stainless Steel:  
Dimensions: 328.3x72x40mm LxHxD  
Protection: IP65  
Wiring Connections: cable glands

**CE APPROVAL**

Vishay Transducers is continually seeking to improve product quality and performance. Specifications may change accordingly.

**ENVIRONMENTAL**

Operating Temp: -10°C to +40°C (14°F to 104°F)  
Storage Temp: -20°C to +55°C (4°F to 158°F)  
Relative Humidity: 90% RH max., non condensing

**VISHAY TRANSDUCERS (VT) SALES OFFICES**

**VT Americas**  
City of Industry, CA  
PH: +1-626-858-8899  
FAX: +1-626-332-3418  
vt.us@vishaymg.com

**VT Netherlands**  
Breda  
PH: +31-76-548-0700  
FAX: +31-76-541-2854  
vt.nl@vishaymg.com

**VMG UK**  
Basingstoke  
PH: +44-125-646-2131  
FAX: +44-125-647-1441  
vt.uk@vishaymg.com

**VMG Israel**  
Netanya  
PH: +972-9-863-8888  
FAX: +972-9-863-8800  
vt.il@vishaymg.com

**VMG Germany**  
Heilbronn  
PH: +49-7131-3901-260  
FAX: +49-7131-3901-2666  
vt.de@vishaymg.com

**VT China**  
Tianjin  
PH: +86-22-2835-3503  
FAX: +86-22-2835-7261  
vt.prc@vishaymg.com

**VMG France**  
Chartres  
PH: +33-2-37-33-31-20  
FAX: +33-2-37-33-31-29  
vt.fr@vishaymg.com

**VT Taiwan\***  
Taipei  
PH: +886-2-2696-0168  
FAX: +886-2-2696-4965  
vt.roc@vishaymg.com  
\*Asia except China



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.