

1.5V CMOS COMPATIBLE 3.2 x 2.5 SMD CRYSTAL CLOCK OSCILLATOR



3.2 x 2.5 x 1.0 mm

ASE4 SERIES



FEATURES:

- Compact and low in height
- Low current consumption
- Tri state function
- 1.5Vdc supply voltage ideal low power ASIC's
- Low supply voltage 1.5V
- Ideal for high density SMT
- IR reflow capable
- Tight stability option

APPLICATIONS:

- CCD clock for VTR camera
- Equipment connected to PC or PC cards
- Thin equipment
- Mobile communications

STANDARD SPECIFICATIONS:


PARAMETERS

Abracon P/N	ASE4 Series
Frequency range:	1MHz ~ 50 MHz New for Q3 2008: Please contact ABRACON for current listing of developed frequencies.
Standard Frequency:	25MHz
Operating temperature:	-10° C to + 70° C (see options)
Storage temperature:	- 55° C to + 125° C
Overall frequency stability:	± 50 ppm max. (see options)
Supply voltage (Vdd):	1.5 Vdc ± 5%
Current Consumption:	10mA max (25MHz)
Symmetry:	45/55 % @ 0.75 V
Rise and fall time (Tr/Tf):	10 ns max (25MHz)
Output load:	15pF ± 10%
Output voltage:	VOH = 0.9 * Vdd min. VOL = 0.1 * Vdd max.
Tri-state function :	"1" (VIH >= 1.35 Vdd) or open: Oscillation "0" (VIL < 0.15 Vdd) : Hi Z
Peak to Peak Jitter :	45.0ps (Typical)(Reference only. Contact ABRACON for the Jitter)
RMS Jitter :	4.0ps (Typical)(Reference only. Contact ABRACON for the Jitter)
Stand-by current:	10µA max.
Aging:	± 5 ppm/first year

OPTIONS & PART IDENTIFICATION:

[Left blank if standard]

ASE4 - Frequency - □ - □ - □

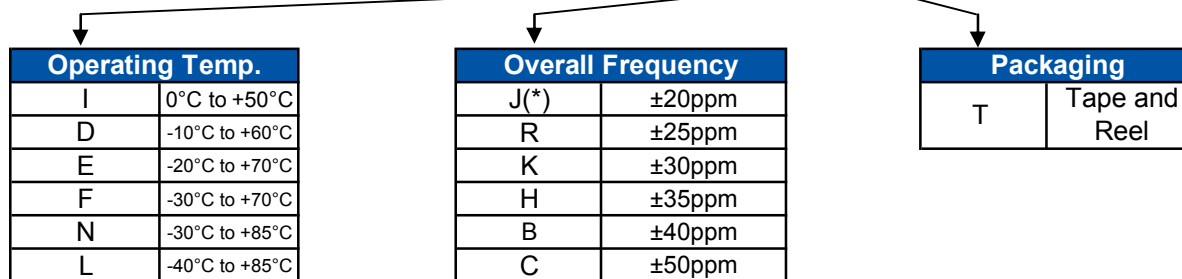

Contact ABRACON for wider temperature range.

* I, D, E, and -10 to +70C only



1.5Vdc CMOS COMPATIBLE 3.2 x 2.5 smd CRYSTAL CLOCK OSCILLATOR




3.2 x 2.5 x 1.0 mm


ASE4 SERIES



OUTLINE DRAWING:

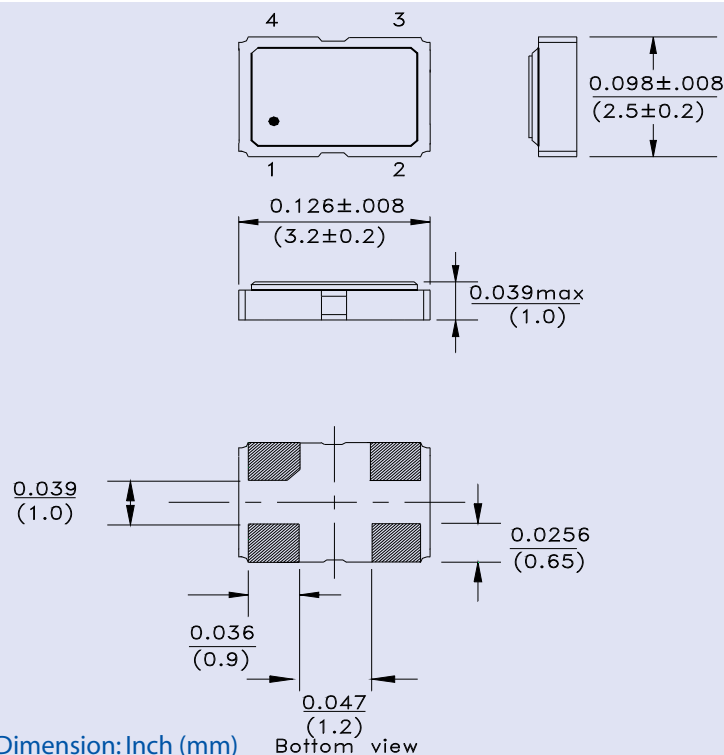

Recommended land pattern

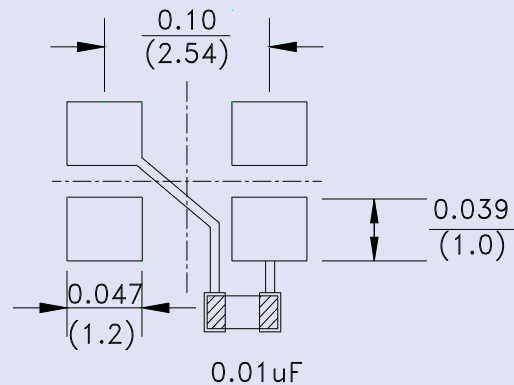

PIN	FUNCTION
1	Tri-state
2	GND/Case
3	Output
4	Vdd

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

TAPE & REEL 1,000 pcs/reel:

