


# Receptacles

DC Micro Male, 4-Pin, 5-Pin or 8-Pin



## Specifications

Receptacle Shell	Nickel-plated brass
Connector Insert	Nylon
Contacts	Machined brass with gold over nickel plating
Wire insulation	Oil resistant PVC, 22AWG stranded copper, 300V
Temperature	-20°C to +105°C (-4°F to +221°F)


## Features

- Male bulkhead receptacles
- 4-, 5- or 8-pin configuration
- M16, M20 or 1/2in -14NPT mounting threads

## Product Selection

Face View of Male	Wire Colour	Wire Rating	Length—m (ft)	Panel Mount Threads	Drawing	Catalogue Number
	1 Brown 2 White 3 Blue 4 Black	22AWG 300V 3A	0.1 (0.3)	M16 x 1	A	888D-M4AC9-4N
				M20 x 1.5	B	888D-M4AC8-4N
	1 Brown 2 White 3 Blue 4 Black 5 Grey	22AWG 300V 3A	0.1 (0.3)	M16 x 1	A	888D-M5AC9-4N
				M20 x 1.5	B	888D-M5AC8-4N
	1 Red 2 Blue 3 Green 4 Yellow 5 Black 6 White 7 N/C 8 Grey	24AWG 36V DC/30V AC 1.5A	0.1 (0.3)	M16 x 1	A	888D-M8AC9-4N
				M20 x 1.5	B	888D-M8AC8-4N

## Approximate Dimensions—mm (inch)

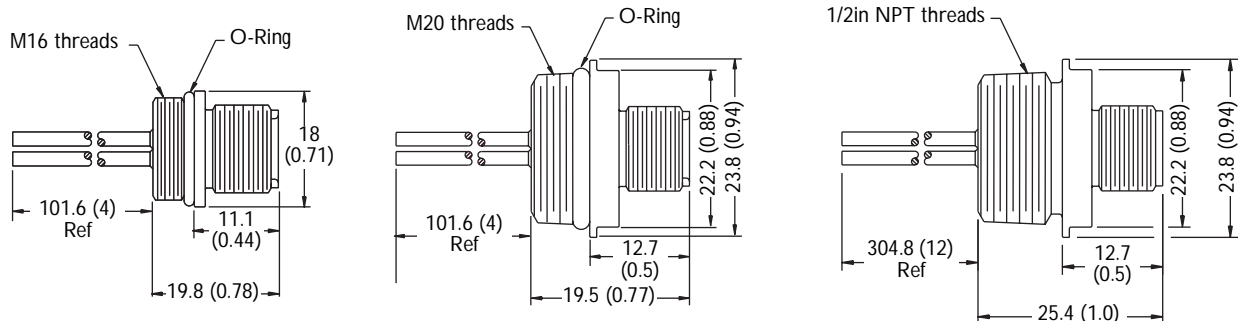

Dimensions are approximate. Illustrations are not drawn to scale.